



I COME  
FROM  
BELGIUM  
WITH  
LOVE



WEVER & DUCRÉ  
LIGHTING

LIFE IS  
TOO SHORT  
FOR BORING  
LIGHTING



WEVER & DUCRÉ  
LIGHTING



ROOMOR

p. 31 — 49



CEILING  
p. 33



CEILING  
p. 35



SUSPENDED  
p. 37



WALL  
p. 39



WALL  
p. 45



TABLE  
p. 47



FLOOR  
p. 49

MIRRO

p. 51 — 63



CEILING  
p. 53



SUSPENDED  
p. 55



WALL  
p. 57



WALL  
p. 57



TABLE  
p. 61



FLOOR  
p. 63

DRO

p. 65 — 79



CEILING  
p. 65



SUSPENDED  
p. 67



WALL  
p. 71



WALL  
p. 71



TABLE  
p. 75



TABLE  
p. 77



FLOOR  
p. 79



FLOOR  
p. 79

ROCK

p. 81 — 87



SUSPENDED  
p. 81




TABLE  
p. 85



FLOOR  
p. 85



NAKED  
p. 85

WIRO

p. 89 — 125



WIRO  
p. 93



DIAMOND  
p. 99



INDUSTRY  
p. 107



GLOBE  
p. 109



CONE  
p. 113



WALL  
p. 117



TABLE  
p. 123



FLOOR  
p. 125

REVER

p. 127 — 147



SUSPENDED  
p. 131



WALL  
p. 133



TABLE  
p. 137



TABLE  
p. 141



FLOOR  
p. 147

J.J.W.

p. 149 — 163



CEILING  
p. 151



SUSPENDED  
p. 153



SUSPENDED  
p. 155



WALL  
p. 157

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <div>CEILING<br/>RECESSED</div> <div>p. 165 – 263</div>                             |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |                                                                                       |
|    |    |    |    |                                                                                     |                                                                                     |    |    |    |
| DEEP BIJOU<br>p. 169                                                                | DEEP PETIT<br>p. 171                                                                | DEEP<br>p. 173                                                                      | DEEP ADJUST<br>PETIT<br>p. 177                                                      |                                                                                     |                                                                                     | DEEP ADJUST<br>p. 183                                                                 | DEEP ADJUST<br>TRIMLESS<br>p. 185                                                     | DEEP ADJUST<br>FORT<br>p. 187                                                         |
|    |    |    |    |    |    |    |    |    |
| DEEP ASYM<br>ADJUST<br>p. 189                                                       | DEEPER<br>p. 175                                                                    | DEEP IP44<br>p. 245                                                                 | DEEPER IP44<br>p. 247                                                               | RONY<br>p. 193                                                                      | RON<br>p. 203                                                                       | RINI IP44<br>p. 251                                                                   | RINI<br>SNEAK IP44<br>p. 255                                                          | RUVI<br>p. 223                                                                        |
|    |    |    |    |    |    |    |    |    |
| CENO 1.0<br>p. 225                                                                  | PIRRO<br>p. 195                                                                     | PYRAMID<br>p. 221                                                                   | PLANO PETIT<br>p. 207                                                               | PLANO<br>p. 209                                                                     | PLANO IP44<br>p. 259                                                                | PLANO<br>ADJUST FORT<br>p. 211                                                        | STRANGE PETIT<br>p. 213                                                               | STRANGE<br>p. 215                                                                     |
|    |    |    |    |    |                                                                                     |                                                                                       |    |    |
| LUNA<br>ROUND IP44<br>p. 253                                                        | LUNA<br>SQUARE IP44<br>p. 257                                                       | SNEAK TRIM<br>p. 217                                                                | SNEAK<br>TRIMLESS<br>p. 219                                                         | CITY IP44<br>p. 263                                                                 |                                                                                     |                                                                                       | BLIEK ROUND<br>PETIT<br>p. 227                                                        | BLIEK ROUND<br>p. 229                                                                 |
|   |   |    |    |   | <div>CEILING<br/>SURFACE</div> <div>p. 265 – 335</div>                              |                                                                                       |                                                                                       |   |
| SPYDER<br>p. 231                                                                    | BLIEK SQUARE<br>p. 235                                                              | SPINEO<br>p. 191                                                                    | NOP PETIT<br>p. 199                                                                 | NOP<br>p. 201                                                                       |                                                                                     |                                                                                       |                                                                                       | MIRRO<br>p. 53                                                                        |
|   |  |  |  |  |  |  |  |  |
| J.J.W.<br>p. 151                                                                    | VENN<br>p. 335                                                                      | BEBOW<br>p. 331                                                                     | PIRRO<br>p. 291                                                                     | SOLID PETIT<br>p. 295                                                               | SOLID<br>p. 299                                                                     | SIRRA<br>p. 303                                                                       | SIRRO<br>p. 305                                                                       | BOX MINI<br>p. 271                                                                    |
|  |  |  |  |  |  |  |  |  |
| BOX<br>p. 275                                                                       | DOCUS<br>p. 281                                                                     | HEXO<br>p. 285                                                                      | RAY<br>p. 267                                                                       | ROB IP44<br>p. 323                                                                  | ROBY IP44<br>p. 325                                                                 | TOWNA IP44<br>p. 327                                                                  | MIRBI IP44<br>p. 329                                                                  | MIRBI IP44<br>p. 329                                                                  |

|                                                                                       |                                                                                       |                                                                                       |                                                                                       |                                                                                       |                                                                                       |                                                                                       |                                                                                       |                                                                                       |                                                                                     |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|    |    |    |    | <div>TRACK<br/>SYSTEM</div> <div>p. 337 — 381</div>                                   |                                                                                       |    |    |    |  |
| SARA<br>p. 309                                                                        | SQUBE<br>p. 311                                                                       | CENO<br>p. 317                                                                        | MICK<br>p. 319                                                                        |                                                                                       |                                                                                       | 48V<br>TRACKS<br>p. 341                                                               | CENO<br>p. 347                                                                        | MICK<br>p. 349                                                                        | DOTS LIGHT<br>MODULE<br>p. 351                                                      |
|    |    |    |    |    |                                                                                       |    |    |    |  |
| OPAL LIGHT<br>MODULE<br>p. 351                                                        | ODREY<br>p. 353                                                                       | STUBE<br>p. 355                                                                       | SOLLI<br>p. 357                                                                       | 1-PHASE<br>TRACKS<br>p. 359                                                           |                                                                                       | SARA<br>p. 361                                                                        | SQUBE<br>p. 363                                                                       | ODREY<br>p. 365                                                                       | RAY<br>p. 367                                                                       |
|    |    |                                                                                       |    |    |    | <div>CEILING<br/>SUSPENDED</div> <div>p. 383 — 471</div>                              |                                                                                       |    |  |
| HEXO<br>p. 367                                                                        | 3-PHASE<br>TRACKS<br>p. 369                                                           |                                                                                       | SQUBE<br>p. 371                                                                       | RAY<br>p. 377                                                                         | HEXO<br>p. 377                                                                        |                                                                                       |                                                                                       | ROOMOR<br>p. 37                                                                       | MIRRO<br>p. 55                                                                      |
|    |    |    |    |    |    |    |    |    |                                                                                     |
| DRO<br>p. 67                                                                          | ROCK<br>p. 81                                                                         | WIRO<br>p. 93                                                                         | DIAMOND<br>p. 99                                                                      | INDUSTRY<br>p. 107                                                                    | GLOBE<br>p. 109                                                                       | CONE<br>p. 113                                                                        | REVER<br>p. 131                                                                       | J.J.W.<br>p. 153                                                                      |                                                                                     |
|   |   |   |   |   |   |   |   |   |                                                                                     |
| ODREY<br>p. 387                                                                       | BOX<br>p. 393                                                                         | DOCUS<br>p. 395                                                                       | HEXO<br>p. 397                                                                        | RAY<br>p. 401                                                                         | SHIEK<br>p. 403                                                                       | SHIEK<br>p. 405                                                                       | SHIEK<br>p. 407                                                                       | WETRO<br>p. 411                                                                       |                                                                                     |
|  |  |  |  |  |  |  |  |  |                                                                                     |
| SELO<br>p. 417                                                                        | DINOR<br>p. 421                                                                       | DINOR<br>p. 421                                                                       | DINOR<br>p. 421                                                                       | CORK<br>p. 423                                                                        | CONE<br>p. 427                                                                        | BISHOP<br>p. 429                                                                      | ELLO<br>p. 437                                                                        | DARF<br>p. 439                                                                        |                                                                                     |
|  |  |  |  |  |  |  |  | <div>MORE<br/>ON THE NEXT<br/>PAGE</div>                                              |                                                                                     |
| VENN<br>p. 441                                                                        | BEBOW<br>p. 443                                                                       | GIGANT<br>p. 447                                                                      | CYCLONE<br>p. 451                                                                     | BOX MULTI<br>p. 457                                                                   | DOCUS MULTI<br>p. 459                                                                 | HEXO MULTI<br>p. 461                                                                  | RAY MULTI<br>p. 463                                                                   |                                                                                       |                                                                                     |

INDOOR

OUTDOOR

|                                                                                                            |                                                                                                            |                                                                                                           |                                                                                                      |                                                                                                           |                                                                                                          |                                                                                                                    |                                                                                                             |                                                                                                                     |
|------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|
| <br>WETRO MULTI<br>p. 465  | <br>SHIEK MULTI<br>p. 467 | <br>CORK MULTI<br>p. 471 | <div>WALL<br/>RECESSED</div> <p>p. 473 — 485</p>                                                     | <br>SMILE IN<br>p. 475   | <br>LITO<br>p. 477      | <br>STRIPE<br>p. 479            | <br>STRANGE<br>p. 481    | <br>THEMIS<br>p. 483             |
| <br>ORIS<br>p. 485        | <div>WALL<br/>SURFACE</div> <p>p. 487 — 561</p>                                                            | <br>ROOMOR<br>p. 39      | <br>MIRRO<br>p. 57  | <br>DRO<br>p. 71         | <br>WIRO<br>p. 117      | <br>REVER<br>p. 133             | <br>J.J.W.<br>p. 157     | <br>ODREY<br>p. 491              |
| <br>RAY MINI<br>p. 495    | <br>RAY<br>p. 497         | <br>BOX MINI<br>p. 503   | <br>BOX<br>p. 505   | <br>DOCUS MINI<br>p. 513 | <br>HEXO MINI<br>p. 515 | <br>TRAIN<br>p. 517             | <br>CENTRAL<br>p. 519    | <br>STATION<br>p. 521            |
| <br>SARA SNOOZE<br>p. 523 | <br>MICK SNOOZE<br>p. 527 | <br>MICK WALL<br>p. 529  | <br>LEENS<br>p. 531 | <br>BENTA<br>p. 533      | <br>BENTO<br>p. 535     | <br>INCH<br>p. 537              | <br>SCAVA<br>p. 539      | <br>MILES<br>p. 541              |
| <br>MILES<br>p. 543      | <br>MILES<br>p. 545      | <br>ARZY<br>p. 547      | <br>VENN<br>p. 549 | <br>FINLIN<br>p. 553    | <br>DARF<br>p. 555    | <br>LIGHTDROP<br>IP44<br>p. 557 | <br>MIRBA IP44<br>p. 559 | <br>MIRBI LONG<br>IP44<br>p. 561 |
| <div>TABLE</div>                                                                                           | <br>ROOMOR<br>p. 47     | <br>MIRRO<br>p. 61     | <br>DRO<br>p. 75  | <br>DRO<br>p. 77       | <br>ROCK<br>p. 85     | <br>WIRO<br>p. 123            | <br>REVER<br>p. 137    | <br>REVER<br>p. 141            |
| <div>FLOOR<br/>SURFACE</div>                                                                               | <br>ROOMOR<br>p. 49     | <br>MIRRO<br>p. 63     | <br>DRO<br>p. 79  | <br>DRO<br>p. 79       | <br>ROCK<br>p. 85     | <br>NAKED<br>p. 85            | <br>WIRO<br>p. 125     | <br>REVER<br>p. 147            |

|                                                                                                                |                                                                                                                |                                                                                                           |                                                                                                                  |                                                                                                           |                                                                                                           |                                                                                                                |                                                                                                                |                                                                                                                |
|----------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| <div>CEILING<br/>RECESSED</div> <p>p. 565 — 567</p>                                                            | <br>INTRA<br>p. 567         | <div>CEILING<br/>SURFACE</div> <p>p. 569 — 585</p>                                                        | <br>BLAS<br>p. 585            | <br>BLAS<br>p. 585     | <br>BOX<br>p. 579      | <br>RAY<br>p. 575           | <br>TUBE<br>p. 573          | <br>TUBE<br>CARRÉ<br>p. 577 |
| <br>TRAM<br>ROUND<br>p. 571 | <br>TRAM<br>CARRÉ<br>p. 571 | <br>ROB<br>p. 583      | <div>WALL<br/>RECESSED</div> <p>p. 587 — 591</p>                                                                 | <br>SMILE IN<br>p. 589 | <br>SMILE IN<br>p. 589 | <br>ORIS<br>p. 591          | <br>ORIS<br>p. 591          |                                                                                                                |
| <div>WALL<br/>SURFACE</div> <p>p. 593 — 637</p>                                                                | <br>SMILE ON<br>p. 627      | <br>SMILE ON<br>p. 627 | <br>SMILE<br>p. 629           | <br>TAPE<br>p. 631     | <br>TUBE<br>p. 597     | <br>TUBE<br>CARRÉ<br>p. 603 | <br>TUBE<br>CARRÉ<br>p. 605 | <br>GETTON<br>p. 635        |
| <br>CENTRAL<br>p. 619       | <br>STATION<br>p. 621       | <br>TRAIN<br>p. 613    | <br>TRAIN<br>NARROW<br>p. 617 | <br>BOX<br>p. 607      | <br>BOXX<br>p. 623     | <br>RAY<br>p. 601           | <br>TRAM<br>p. 595          | <br>PALOS<br>p. 637         |
| <br>PALOS<br>p. 637        | <br>SWAM<br>p. 633         | <br>X-BEAM<br>p. 625  | <div>FLOOR<br/>RECESSED</div> <p>p. 639 — 649</p>                                                                | <br>CARD<br>p. 641     | <br>MAP<br>p. 643      | <br>MAP ASYM<br>p. 645      | <br>CHART<br>p. 647         | <br>CHART ASYM<br>p. 649    |
| <div>FLOOR<br/>SURFACE</div> <p>p. 651 — 687</p>                                                               | <br>STIPO<br>p. 653       | <br>STAKE<br>p. 659  | <br>STAKE FOLD<br>p. 655    | <br>X-BEAM<br>p. 657 | <br>COSTA<br>p. 661  | <br>COSTA<br>p. 663       | <br>SWAM<br>p. 667        | <br>GETTON<br>p. 669      |
| <br>TAPE<br>p. 671        | <br>PACE<br>p. 673        | <br>SMILE<br>p. 675  | <br>FIFTY FIFTY<br>p. 677   | <br>SWAY<br>p. 679   | <br>PALOS<br>p. 681  | <br>EDGE<br>p. 683        | <br>LINUS<br>p. 685       | <br>PALLUZ C<br>p. 687    |



# FROM BELGIUM WITH LOVE



## LIGHT UP YOUR LIFE

Delicious waffles and chocolate prepared with love – that’s what Belgium is famous for, right? Not exactly. For a while now, Belgium has also become known for trendy lights that not only look great, but also have compelling inner values. State-of-the-art LEDs that feel equally at home in a cosy attic apartment or in the hippest club in the city. Because they save space, preserve resources, and offer a greater quality of life. And that is exactly what we at Wever & Ducré want. Where do we get our inspiration? From people like you, who share our passion for beautiful things and who pay as much attention to great design as to high-quality products. Sounds good? Then keep reading. The newest highlights are waiting for you.

## WIR BRINGEN SIE ZUM STRAHLEN

Köstliche und mit viel Liebe zubereitete Waffeln und Schokolade – dafür ist Belgien berühmt. Stimmt’s? Nicht ganz. Seit einiger Zeit steht Belgien auch für trendige Leuchten, die nicht nur toll aussehen, sondern auch mit inneren Werten punkten. LEDs der jüngsten Generation, die sich in einer kleinen Dachgeschoßwohnung ebenso wohlfühlen wie im angesagtesten Club der Stadt. Denn sie sparen Platz, schonen die Ressourcen und sorgen so ganz einfach für mehr Lebensqualität. Und genau das ist es auch, was wir von Wever & Ducré möchten. Von wem wir uns dabei inspirieren lassen? Von Menschen wie Ihnen, die unsere Begeisterung für schöne Dinge teilen und auf edles Design ebensoviel Wert legen wie auf eine hochwertige Verarbeitung. Klingt interessant? Dann blättern Sie doch einfach weiter. Die neuesten Hotspots warten schon auf Sie.





COME ON BY

# HOMETOWN GLORY KORTRIJK



Anyone who loves exceptional and fresh design must see Kortrijk. Wever & Ducré's hometown hosts one of the most important trade fairs in Europe, and as the City of Design, it has been home to the latest lighting trends. Want to see for yourself? Come to the Wever & Ducré headquarters, which boasts a new warehouse and a huge showroom. Sounds good? Let's go. A fresh cup of coffee and our brand-new collections are waiting for you.

Wer außergewöhnliches, junges Design liebt, muss auf jeden Fall mal in Kortrijk gewesen sein. Und das nicht nur, weil hier eine der wichtigsten Interieur-Messen Europas stattfindet, sondern auch, weil die „City of Design“ das Zuhause der aktuellsten Leuchtentrends ist. Wo man diese bewundern kann? Natürlich im Wever & Ducré- Headquarter, zu dem neben einem neuen Warenlager auch ein riesengroßer Showroom gehört. Klingt gut? Dann nichts wie los. Eine Tasse frischer Kaffee und unsere brandneuen Kollektionen warten schon auf Sie.

## SHOWROOM


**WEVER & DUCRÉ**  
SHOWROOM  
Spinnerijstraat 99/21  
8500 Kortrijk  
Belgium  
+32 56 49 28 00

## OPERATIONAL SITE

**WEVER & DUCRÉ**  
OPERATIONAL SITE  
Evolis 118  
8530 Harelbeke  
Belgium



**EXPLORE KORTRIJK**  
[weverducre.com/kortrijk](https://weverducre.com/kortrijk)

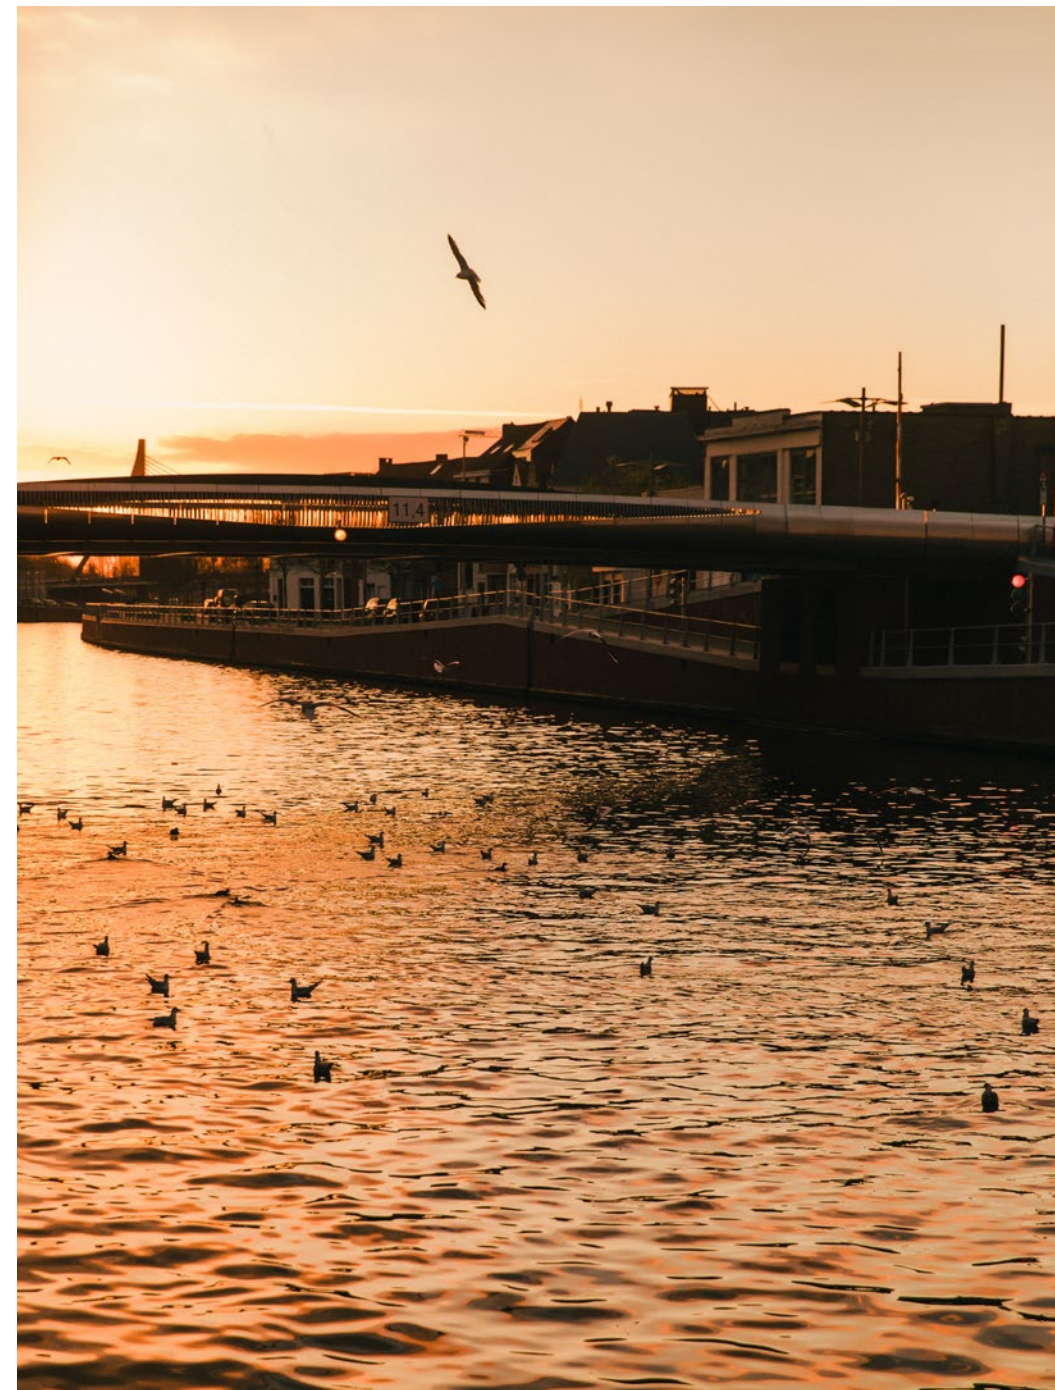

ALWAYS WITH YOU

# ALL OVER THE WORLD



Wever & Ducré luminaires may be true Belgians, but they went global right from the get-go and are already in over 60 countries. And always right where the action is. In the chicest bars, the hippest clubs, and of course the coolest lofts in town. From London to New York. From Lucerne to Paris. Want to look at our trendsetters in peace? Drop by one of our nine showrooms. The latest Wever & Ducré highlights are waiting for you.

Wever & Ducré-Leuchten sind zwar echte Belgier, doch von Beginn an wahre Globetrotter. Deshalb findet man sie heute auch in über 60 Ländern der Welt. Und zwar immer genau da, wo was los ist. In den schicksten Lokalen, den angesagtesten Clubs und natürlich den coolsten Lofts der Stadt. Von London bis New York. Von Luzern bis Paris. Sie möchten sich unsere Trendsetter mal ganz in Ruhe ansehen? Dann kommen Sie doch einfach in einem unserer neun Showrooms vorbei. Die aktuellen Wever & Ducré-Highlights warten schon auf Sie.



**WEVER & DUCRÉ COLOGNE**  
SHOWROOM  
Schanzenstraße 36, Geb. 234B  
51063 Cologne  
+49 221 1306496 0



**WEVER & DUCRÉ LONDON**  
SHOWROOM  
23 Batemans Row  
EC2A 3HH London  
+44 203 174 0177



**WEVER & DUCRÉ STOCKHOLM**  
SHOWROOM  
Hårdvallsgatan 18  
115 46 Stockholm  
+46 70 844 84 84



**WEVER & DUCRÉ HONG KONG**  
SHOWROOM  
EM-1413, Block A, Sea Port View Estate  
2 Watson Road North Point, Hong Kong  
+852 2110 6924




**WEVER & DUCRÉ WARSAW**  
SHOWROOM  
Diamond Business Park, Posag 7 Panien  
Street no 1, 02-495 Warsaw  
+48 730 330 337



**WEVER & DUCRÉ GRAZ**  
SHOWROOM  
Gleisdorfer Gasse 15  
8010 Graz  
+43 316 31708591



**WEVER & DUCRÉ SAN DONÀ DI PIAVE**  
SHOWROOM  
Via Monte Popera 4/2  
30027 San Donà di Piave - Venezia  
+39 0421 17 78 388



**WEVER & DUCRÉ LYON**  
SHOWROOM  
36, Rue Juliette Récamier  
69006 Lyon  
+33 4 72 81 12 00



**WEVER & DUCRÉ PARIS**  
SHOWROOM  
10, Rue Pecquay  
75004 Paris  
+33 1 40 29 81 01



**WEVER & DUCRÉ LUCERNE**  
OFFICE  
Kellerstraße 22  
6005 Lucerne  
+41 41 361 60 60



# LET'S STICK TOGETHER

## WE LIKE EVERY PIECE OF IT

“At university, we always had to keep a sketchbook for every project,” says Egija Zirapa when asked about her preference for collages. “And somehow I usually found the newspaper clippings collected in it more interesting than the final outcome itself – I loved expressing myself in them.” No wonder this technique became her favourite. After all, a wide variety of subjects can be combined to form an entirely new statement. This is an idea we like. Because at Wever & Ducré, designers, architects, and artists from all over the world work together to create something new. We asked Egija Zirapa to create an unique work of art for us. Where? Right in Latvia, her home country, where the mural was crafted in an old brewery in Cēsis.

## UNS GEFÄLLT JEDES TEIL DAVON

„An der Universität mussten wir immer ein kleines Skizzenbuch mit uns herumtragen“, erzählt Egija Zirapa, wenn man sie nach ihrer Vorliebe für Collagen fragt, „und irgendwie fand ich die darin gesammelten Zeitungsausschnitte meist interessanter als das Werk selbst.“ Kein Wunder also, dass gerade diese Technik zu ihrem Favoriten wurde. Schließlich lassen sich damit unterschiedlichste Dinge zu einer ganz neuen Aussage zusammenfügen. Eine Idee, die uns gefällt. Denn auch bei Wever & Ducré arbeiten Designer, Architekten und Künstler aus allen Erdteilen daran, gemeinsam etwas völlig Neues zu schaffen. Also haben wir Egija Zirapa gebeten, für uns ein neues Kunstwerk zu schaffen. Wo? Gleich direkt in ihrem Heimatland Lettland, wo das Mural in einer alten Brauerei in Cēsis umgesetzt wurde.



“I can change the mood and emotion of an image. Piece by piece.”

EGIJA ZIRAPA







# TRUST YOUR EYES

AMAZING MATERIALS AND FINISHES



“Is this really stone?” We hear questions like this a lot at Wever & Ducré. It’s no wonder. After all, there’s virtually no material our designers don’t experiment with. We create luminaires that make a statement, and that you wouldn’t find on every ceiling. From beautiful walnut wood to soft felt to real marble. Sounds crazy? It is. But it is precisely this extraordinary combination of design and material that defines a genuine Wever & Ducré luminaire. You like aluminium? Choose your favourite from our range of different finishes from our new collection.

„Ist das wirklich Stein?“ Fragen wie diese hören wir bei Wever & Ducré öfter. Kein Wunder. Schließlich gibt es fast kein Material, mit dem unsere Designer nicht experimentieren. Das Ergebnis: Leuchten mit Statement-Charakter, die man ganz sicher nicht an jeder Decke findet. Von edlem Walnussholz über weichen Filz bis zu echtem Marmor. Klingt verrückt? Ist es auch. Aber genau diese außergewöhnliche Kombination aus Design und Material ist es, die eine echte Wever & Ducré-Leuchte ausmacht. Sie haben sich für Aluminium entschieden? Dann können Sie zusätzlich aus vielen unterschiedlichen Finishes wählen. Also schnell zu den neuen Kollektionen weiterblättern und sich Ihren persönlichen Favoriten aussuchen.














SEE ALL MATERIALS AND FINISHES

[weverducre.com/materials](https://weverducre.com/materials)

# FINISHES

## PAINTED FINISHES | METAL FINISHES

|                                                                                    |           |                                                                                |                                                                                      |           |                                                     |                                                                                       |           |                                                                                            |                                                                                       |          |                                              |
|------------------------------------------------------------------------------------|-----------|--------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------|-----------------------------------------------------|---------------------------------------------------------------------------------------|-----------|--------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------|----------------------------------------------|
|    | <b>A</b>  | Anthracite Grey<br>Aluminium powder coated texture<br>RAL 7016                 |    | <b>GR</b> | Greyish Rose<br>Composite material wet painted      |    | <b>R</b>  | Coral Red<br>Aluminium wet painted<br>RAL 3016                                             |    | <b>C</b> | Chrome<br>Steel glossy chrome plated         |
|    | <b>B</b>  | Signal Black<br>Aluminium powder coated without texture<br>RAL 9004            |    | <b>SY</b> | Soft Yellow<br>Composite material wet painted       |    | <b>RW</b> | Coral Red and White Texture<br>Aluminium wet painted                                       |    | <b>C</b> | Chrome<br>Steel glossy chrome plated         |
|    | <b>B</b>  | Jet Black<br>Aluminium powder coated wet painted in matt structure<br>RAL 9005 |    | <b>O</b>  | Pastel Green<br>Steel wet painted<br>RAL 6019       |    | <b>S</b>  | White Aluminium<br>Aluminium powder coated without texture<br>RAL 9006                     |    | <b>G</b> | Light Gold<br>Steel plated                   |
|    | <b>D</b>  | Dark Grey Texture<br>Aluminium powder coated in matt structure<br>RAL 9007     |    | <b>J</b>  | White Texture and Gold<br>Aluminium wet painted     |    | <b>S</b>  | Silver/Grey<br>Aluminium powder coated without texture                                     |    | <b>P</b> | Pink Copper<br>Steel plated                  |
|    | <b>G</b>  | Gold<br>Aluminium painted/brushed                                              |    | <b>K</b>  | Black Texture and Gold<br>Aluminium wet painted     |    | <b>T</b>  | Light Grey<br>Steel powder coated<br>RAL 7035                                              |    | <b>I</b> | Inox<br>304 Stainless steel electro polished |
|   | <b>G</b>  | Cement Grey<br>Aluminium wet painted<br>RAL 7033                               |   | <b>P</b>  | Copper<br>Aluminium or steel painted brushed        |   | <b>W</b>  | Signal White<br>Aluminium or steel powder coated wet painted in matt structure<br>RAL 9003 |   | <b>L</b> | Aluminium Brushed<br>Aluminium brushed       |
|  | <b>GW</b> | Cement Grey and White<br>Aluminium wet painted                                 |  | <b>P</b>  | Copper<br>Steel varnished lacquered                 |  | <b>W</b>  | Pure White<br>Aluminium powder coated without texture<br>RAL 9010                          |  | <b>M</b> | Matt Chrome<br>Steel matt chrome plated      |
|  | <b>D</b>  | Dark Grey Texture<br>Composite material wet painted                            |  | <b>Z</b>  | Black Texture and Copper<br>Aluminium powder coated |  | <b>Y</b>  | Grey Brown<br>Aluminium or steel powder coated in matt structure<br>RAL 8019               |  | <b>N</b> | Black Chrome<br>Plated steel                 |
|  | <b>GG</b> | Greyish Green<br>Composite material wet painted                                |  | <b>Q</b>  | Bronze<br>Aluminium painted/brushed                 |  | <b>A</b>  | Aluminium Anodised<br>Aluminium anodised                                                   |  | <b>V</b> | Rust<br>Steel varnished rusted               |



# MATERIALS

GLASS | MARBLE | WOOD | PORCELAIN | SYNTHETIC COMPOSITE MATERIAL




**B** Smoked  
Glass handblown



**MW** White  
Marble



**P** Copper  
Glass handblown



**W** White  
Porcelain handmade



**TS** Taupe Striped  
Glass handblown




**W** White  
LLDPE



**TW** Taupe White  
Glass handblown



**AY** Amber Yellow  
Polycarbonate




**TD** Taupe Diamond  
Glass handblown



**CW** Champagne White  
Polycarbonate



**FD** Crystal Opal  
Opal glass handblown



**HR** Hip Rose  
Polycarbonate




**W** White  
Opal glass handblown




**SG** Smoke Grey  
Polycarbonate



**Y** Brown  
Opal glass handblown



**TG** Tea Green  
Polycarbonate



**MB** Black  
Marble



**OR** Traffic Orange  
Polypropylene  
RAL 2009




**SB** Water Blue  
Polypropylene  
RAL 5021




**N** Black Chrome  
Aluminium composite material



**YE** Colza Yellow  
Polypropylene  
RAL 1021



**D** Multi Colour  
Stone



**F** Grey  
Recycled PET felt



**W** Autumn White  
Stone




**G** Light Gold  
Aluminium composite material



**WN** Walnut  
Wood

# COMBINATIONS

FINISHES AND MATERIALS



**E** White Texture and Black  
Aluminium powder coated brushed



**X** White Texture and  
Aluminium Brushed  
Aluminium powder coated  
and aluminium brushed

FROM DUSK TILL DAWN

# RIGHT ATMOSPHERE AND MOOD



## TURN IT HOWEVER YOU WANT

You can now set the right light for any mood with a simple twist. Do you want a chipper morning at 3000 K, or a romantic evening with a candlelight atmosphere at 1800 K? Either way, we have it covered! And the best thing is, the Ambient White Dim is available for nearly all of our lights. So you don't have to compromise on design. All you need is a 3-wire cable, a phase cut dimmer, and one of our lights. Keep shining!

## DREHN SIE'S, WIE SIE'S MÖCHTEN


Ab sofort können Sie im Handumdrehen genau die Lichtstimmung zaubern, die Ihnen gefällt. Ein munterer Morgen bei 3000 K oder lieber ein romantischer Abend mit Candlelight-Stimmung bei 1800 K? Kein Problem. Und das Beste: Das Ambient White Dim ist für fast alle unsere Leuchten erhältlich. Damit sind Ihnen in puncto Design keine Grenzen gesetzt. Alles, was Sie brauchen, sind ein 3-poliges Kabel, ein Phasenabschnittsdimmer und eine unserer Leuchten. Also, keep shining!

GET YOURSELF

# IN THE MOOD FOR

2700 K for  
**lunch**

3000 K for  
**breakfast**

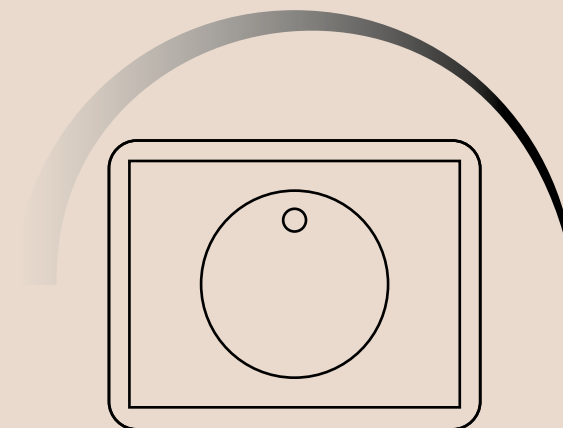

1800 K for  
**dinner**

3000 K to 1800 K in  
less than a second



SIGNED, SEALED, AND DELIVERED

# YOU'VE BEEN EXPECTING ME

## ... SO WHAT NOW?

Now that you've fallen head over heels in love with one of our luminaires, there's only one last thing you want – and that's to have it as soon as possible. We understand that all too well. That's why we do everything we can to ensure that your new treasure arrives in record time. Here's an example. If we receive an order by 2:30 pm, we can ship it the very next day, since we have nearly all our luminaires on stock. That way, nothing stands in the way of your first evening together.

## ... UND AB DIE POST

Sie haben sich Hals über Kopf in eine unserer Leuchten verliebt und möchten jetzt nur noch eines: sie so schnell wie möglich bei sich haben? Verstehen wir gut. Deshalb tun wir alles, um Ihren neuen Liebling im Rekordtempo zu Ihnen zu bringen. Kleines Beispiel gefällig? Erreicht uns eine Bestellung bis 14:30 Uhr, können wir sie – da wir fast alle unsere Leuchten lagernd haben – gleich am nächsten Tag versenden. So steht dem ersten gemeinsamen Abend nichts mehr im Wege.



“When I see something beautiful, I simply have to have it now.”

YVES MARGINET  
AREA SALES MANAGER



IN

DOOR

# DESIGNER FAMILIES

p. 31 – 163

## ROOMOR



**ROOMOR  
CEILING 1.0**  
p. 33



**ROOMOR  
CEILING 2.0**  
p. 35



**ROOMOR  
SUSPENDED**  
p. 37



**ROOMOR  
WALL 2.0**  
p. 39



**ROOMOR  
WALL 4.0**  
p. 45



**ROOMOR  
TABLE 1.0**  
p. 47



**ROOMOR  
FLOOR**  
p. 49

## MIRRO



**MIRRO  
CEILING**  
p. 53



**MIRRO  
SUSPENDED**  
p. 55



**MIRRO  
WALL**  
p. 57



**MIRRO  
TABLE**  
p. 61



**MIRRO  
FLOOR**  
p. 63

## DRO



**DRO  
CEILING**  
p. 65



**DRO  
SUSPENDED**  
p. 67



**DRO  
WALL**  
p. 71



**DRO  
TABLE**  
p. 75



**DRO  
FLOOR**  
p. 79

## ROCK COLLECTION



**ROCK  
SUSPENDED**  
p. 81



**ROCK  
FLOOR**  
p. 85



**ROCK  
NAKED**  
p. 85

## WIRO



**WIRO  
SUSPENSION  
SYSTEMS**  
p. 91



**WIRO  
WALL**  
p. 117



**WIRO  
TABLE**  
p. 123



**WIRO  
FLOOR**  
p. 125

## REVER



**REVER  
SUSPENDED**  
p. 131



**REVER  
WALL**  
p. 133



**REVER  
TABLE**  
p. 137



**REVER  
DINING**  
p. 141



**REVER  
FLOOR**  
p. 147

## J.J.W.



**J.J.W.  
SURFACE**  
p. 151



**J.J.W.  
SUSPENDED**  
p. 153



**J.J.W.  
WALL**  
p. 157

A TRUE ALL-ROUNDER

# ROOMOR HAS IT



MIX AND MATCH


[weverducre.com/roomor](https://weverducre.com/roomor)



It's safe to believe the rumours: ROOMOR is a lamp that can change its appearance faster than a chameleon. And all it takes is a few simple steps. Just choose the shape and colour and combine them to your heart's content. As a result, ROOMOR can be transformed into everything from a minimalistic floor lamp to an opulent suspended luminaire to a discreet table lamp that can be used to create exceptional design accents at the office and beyond. And because ROOMOR is entirely adaptable to its surroundings when it comes to materials, all of the shade designs are offered in either painted aluminium or finely textured felt. Nothing could be more flexible.

Sie können den Gerüchten ruhig glauben: ROOMOR ist eine Leuchte, die ihre Optik schneller wechselt als ein Chamäleon. Und das mit nur wenigen Handgriffen. Einfach Form und Farbe auswählen und loskombinieren. So wird aus ROOMOR mal eine minimalistische Stehlampe, mal eine opulente Hängeleuchte und mal eine dezente Tischlampe, mit der sich nicht nur im Büro schöne Design-Akzente setzen lassen. Und weil sich ROOMOR auch in puncto Material ganz ihrer Umgebung anpasst, sind alle Schirmformen entweder in lackiertem Aluminium oder in fein strukturiertem Filz erhältlich. Flexibler geht's nicht.

# MIX AND MATCH

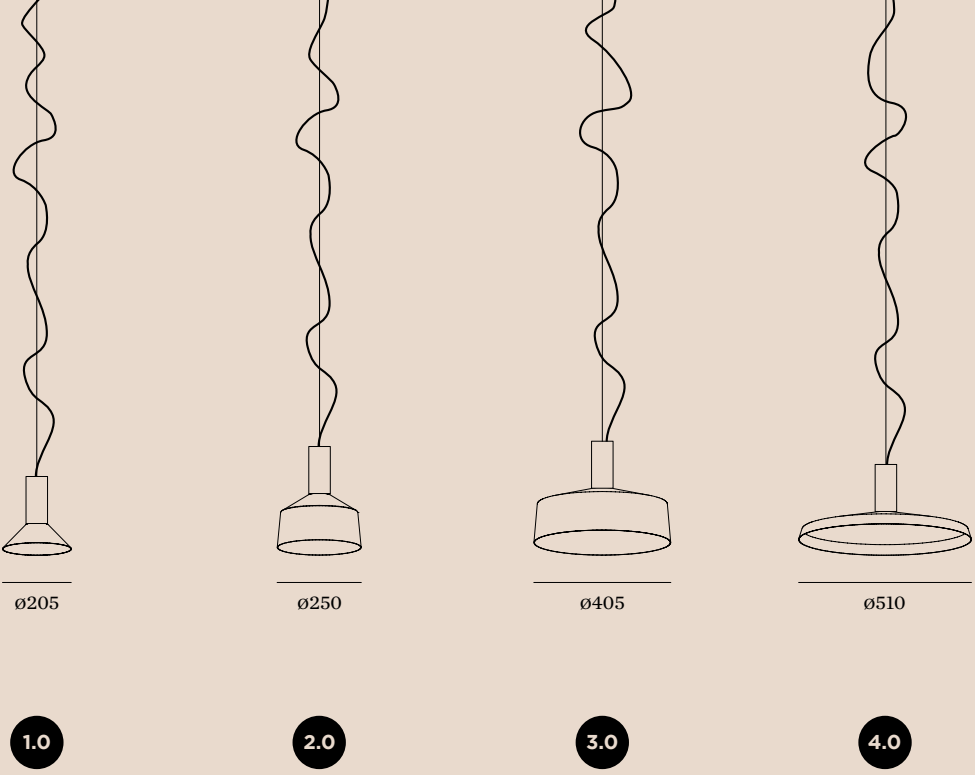


| CEILING         |                                                         |                                                         |                                                         |                                                         |
|-----------------|---------------------------------------------------------|---------------------------------------------------------|---------------------------------------------------------|---------------------------------------------------------|
| 1.0 PAR16   E27 | <div><div></div><div></div><div></div></div>            | <div><div></div><div></div><div></div></div>            | <div><div></div><div></div><div></div></div>            | <div><div></div><div></div><div></div></div>            |
| 2.0 PAR16   E27 | <div><div></div><div></div><div></div></div>            | <div><div></div><div></div><div></div></div>            | <div><div></div><div></div><div></div></div>            | <div><div></div><div></div><div></div></div>            |
| SUSPENDED       |                                                         |                                                         |                                                         |                                                         |
| 1.0 PAR16   E27 | <div><div></div><div></div><div></div><div></div></div> | <div><div></div><div></div><div></div><div></div></div> | <div><div></div><div></div><div></div><div></div></div> | <div><div></div><div></div><div></div><div></div></div> |
| WALL            |                                                         |                                                         |                                                         |                                                         |
| 1.0             | <div><div></div><div></div><div></div><div></div></div> |                                                         |                                                         |                                                         |
| 2.0             | <div><div></div><div></div><div></div><div></div></div> | <div><div></div><div></div><div></div></div>            |                                                         |                                                         |
| 3.0             | <div><div></div><div></div><div></div><div></div></div> |                                                         |                                                         |                                                         |
| 4.0             | <div><div></div><div></div><div></div><div></div></div> | <div><div></div><div></div><div></div></div>            | <div><div></div><div></div><div></div></div>            | <div><div></div><div></div><div></div></div>            |
| 5.0             | <div><div></div><div></div><div></div><div></div></div> |                                                         |                                                         |                                                         |
| TABLE           |                                                         |                                                         |                                                         |                                                         |
| 1.0             | <div><div></div><div></div><div></div><div></div></div> |                                                         |                                                         |                                                         |
| 2.0             | <div><div></div><div></div><div></div><div></div></div> |                                                         |                                                         |                                                         |
| FLOOR           |                                                         |                                                         |                                                         |                                                         |
| 1.0             | <div><div></div><div></div><div></div></div>            | <div><div></div><div></div><div></div></div>            | <div><div></div><div></div><div></div></div>            |                                                         |

RW | coral red + white     G | cement grey + white     K | black + gold     B | black     F | grey felt





CAFÉ AMSTERDAM | NETHERLANDS




**1.0 PAR16**  
PAR16 max. 15W | GU10  
100-240VAC | 50-60Hz  
wet painted aluminium

1.10kg IP20 45°/45°

mounting only  
CODE  
168120B\_

**OPTIONAL**  
PAR16 LED GU10 7W | phase-cut dim  
2700K | 360lm  
CODE  
901228B3  
more lamps and specs on page 701

extension tube  
CODE  
0.5m 90019192  
1.0m 90019191



**1.0 E27**  
A60 max. 15W | E27  
220-240VAC | 50-60Hz  
wet painted aluminium

1.10kg IP20 45°/45°

mounting only  
CODE  
1681E0B\_

**OPTIONAL**  
A60 LED E27 9W | phase-cut dim  
2700K | 800lm  
CODE  
9003E152  
more lamps and specs on page 703

extension tube  
CODE  
0.5m 90019192  
1.0m 90019191

ROOMOR  
CEILING SURFACE



ALWAYS USE

no shade  
CODE  
00

shade 1.0 | Ø205mm  
CODE  
B1  
K1  
F1  
grey felt

shade 2.0 | Ø250mm  
CODE  
B2  
K2  
F2  
grey felt

shade 3.0 | Ø405mm  
CODE  
B3  
K3  
F3  
grey felt

shade 4.0 | Ø510mm  
CODE  
B4  
K4  
F4  
grey felt

overview on page 31



HOTEL ROTTERDAM | NETHERLANDS



B1




K2



F3



B4



2.0 PAR16

2x PAR16 max. 15W | GU10  
100-240VAC | 50-60Hz  
wet painted aluminium

1.75kg IP20 45°/45°

mounting only

CODE  
169120B\_

OPTIONAL


PAR16 LED GU10 7W | phase-cut dim  
2700K | 360lm

CODE  
901228B3

more lamps and specs on page 701

extension tube

CODE  
0.5m 90019192  
1.0m 90019191



2.0 E27

2x A60 max. 15W | E27  
220-240VAC | 50-60Hz  
wet painted aluminium

1.75kg IP20 45°/45°

mounting only

CODE  
1691E0B\_

OPTIONAL

A60 LED E27 9W | phase-cut dim  
2700K | 800lm

CODE  
9003E152

more lamps and specs on page 703

extension tube

CODE  
0.5m 90019192  
1.0m 90019191

ROOMOR

CEILING SURFACE



reddot award 2019  
winner lighting design

ALWAYS USE

no shade  
CODE  
00

shade 1.0 | Ø205mm | 2 shades incl.  
CODE  
B1  
K1  
F1

grey felt

shade 2.0 | Ø250mm | 2 shades incl.  
CODE  
B2  
K2  
F2

grey felt

shade 3.0 | Ø405mm | 2 shades incl.  
CODE  
B3  
K3  
F3

grey felt

shade 4.0 | Ø510mm | 2 shades incl.  
CODE  
B4  
K4  
F4


grey felt

overview on page 31





CAFÉ AMSTERDAM | NETHERLANDS



B1



K2




R2



G3



F4



1.0 PAR16

PAR16 max. 15W | GU10  
100-240VAC | 50-60Hz  
wet painted aluminium  
incl. cable and ceiling base in  
the same colour as the lamp body

0.80kg IP20 0.3

mounting only

|  |         |
|--|---------|
|  | CODE    |
|  | 248120B |
|  | 248120R |
|  | 248120G |

6.0m suspension on page 712

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim  
2700K | 360lm

|  |          |
|--|----------|
|  | CODE     |
|  | 901228W3 |
|  | 901228B3 |

more lamps and specs on page 701



1.0 E27

A60 max. 15W | E27  
220-240VAC | 50-60Hz  
wet painted aluminium  
incl. cable and ceiling base in  
the same colour as the lamp body

0.80kg IP20 0.3

mounting only

|  |         |
|--|---------|
|  | CODE    |
|  | 2481E0B |
|  | 2481E0R |
|  | 2481E0G |

6.0m suspension on page 712

OPTIONAL

A60 LED E27 9W | phase-cut dim

|               |          |
|---------------|----------|
|               | CODE     |
| 2700K   800lm | 9003E152 |

more lamps and specs on page 703

ROOMOR

CEILING SUSPENDED



reddot award 2019  
winner lighting design

ALWAYS USE

|          |      |
|----------|------|
| no shade | CODE |
|          | 00   |

|                    |      |
|--------------------|------|
| shade 1.0   Ø205mm | CODE |
|                    | B1   |
|                    | K1   |
|                    | R1   |
|                    | G1   |
| grey felt          | F1   |

|                    |      |
|--------------------|------|
| shade 2.0   Ø250mm | CODE |
|                    | B2   |
|                    | K2   |
|                    | R2   |
|                    | G2   |
| grey felt          | F2   |

|                    |      |
|--------------------|------|
| shade 3.0   Ø405mm | CODE |
|                    | B3   |
|                    | K3   |
|                    | R3   |
|                    | G3   |
| grey felt          | F3   |



|                    |      |
|--------------------|------|
| shade 4.0   Ø510mm | CODE |
|                    | B4   |
|                    | K4   |
|                    | R4   |
|                    | G4   |
| grey felt          | F4   |

overview on page 31





reddot award 2019  
winner lighting design



1.0

PAR16 max. 15W | GU10  
100-240VAC | 50-60Hz  
wet painted steel and aluminium

0.90kg IP20 45°/45°

mounting only

|  | CODE     |
|--|----------|
|  | 338120B_ |
|  | 338120R_ |
|  | 338120G_ |

ALWAYS USE

no shade

|  | CODE |
|--|------|
|  | 00   |

shade 1.0 | Ø205mm

|  | CODE |
|--|------|
|  | B1   |
|  | K1   |
|  | R1   |
|  | G1   |
|  | F1   |

overview on page 31

2.0

PAR16 max. 15W | GU10  
100-240VAC | 50-60Hz  
wet painted steel and aluminium

1.10kg IP20 45°/45°

mounting only

|  | CODE     |
|--|----------|
|  | 338220B_ |

ALWAYS USE

no shade

|  | CODE |
|--|------|
|  | 00   |

shade 1.0 | Ø205mm

|  | CODE |
|--|------|
|  | B1   |
|  | K1   |
|  | F1   |

shade 2.0 | Ø250mm

|  | CODE |
|--|------|
|  | B2   |
|  | K2   |
|  | F2   |

overview on page 31

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim  
2700K | 360lm

|  | CODE     |
|--|----------|
|  | 901228W3 |
|  | 901228B3 |

more lamps and specs on page 701





## ROOMOR

## WALL SURFACE



reddot award 2019  
winner lighting design



### 3.0

PAR16 max. 15W | GU10  
100-240VAC | 50-60Hz  
wet painted aluminium

  0.85kg  IP20  45°/45°  30°/30°

mounting  
cable plug with hand switch


## 5.0

PAR16 max. 15W | GU10  
100-240VAC | 50-60Hz  
wet painted steel and aluminium

  1.45kg  IP20  45°/45°  30°/30°


mounting  
cable plug with hand switch

CODE  
339120B\_



cable base round

339220B\_




**ALWAYS USE**

no shade


CODE  
00

shade 1.0 | Ø205mm

|                                                                                                 | CODE |
|-------------------------------------------------------------------------------------------------|------|
|            | BL   |
|            | KL   |
|  grey felt | FL   |




CODE  
340120B\_



cable base round

340220B\_



**ALWAYS USE**

no shade

CODE  
00

shade 1.0 | Ø205mm

|                                                                                                 | CODE |
|-------------------------------------------------------------------------------------------------|------|
|            | BL   |
|            | KL   |
|  grey felt | FL   |

## OPTIONAL

PAR16 LED GU10 7W | phase-cut dim  
2700K | 360lm

CODE  
901228B3

more lamps and specs on page 701










URBAN SPACES | STUDIO KOMO STUTTGART | DEUTSCHLAND




4.0

PAR16 max. 15W | GU10  
100-240VAC | 50-60Hz  
wet painted aluminium


1.30kg | IP20 | 45°/45° | 30°/30°

mounting  
cable plug with floor switch

CODE  
339520B...



cable base round  
339620B...



ROOMOR

WALL SURFACE



reddot award 2019  
winner lighting design

ALWAYS USE

no shade  
CODE  
00

shade 1.0 | Ø205mm  
CODE  
B1  
K1  
grey felt  
F1

shade 2.0 | Ø250mm  
CODE  
B2  
K2  
grey felt  
F2

shade 3.0 | Ø405mm  
CODE  
B3  
K3  
grey felt  
F3

shade 4.0 | Ø510mm  
CODE  
B4  
K4  
grey felt  
F4

overview on page 31

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim  
2700K | 360lm

CODE  
901228B3

more lamps and specs on page 701







HOTEL ROTTERDAM | NETHERLANDS

ROOMOR

TABLE




1.0

PAR16 max. 15W | GU10  
100-240VAC | 50-60Hz  
wet painted steel and aluminium  
incl. cable in the same colour as  
the lamp body | black plug with  
switch for black cable otherwise  
transparent plug with switch

3.40kg IP20 45°/45° 30°/30°

mounting  
cable plug with hand switch

| CODE |         |
|------|---------|
|      | 637120B |
|      | 637120R |
|      | 637120G |



ALWAYS USE

no shade

| CODE |    |
|------|----|
|      | 00 |

shade 1.0 | Ø205mm

| CODE      |    |
|-----------|----|
|           | B1 |
|           | K1 |
|           | R1 |
|           | G1 |
| grey felt | F1 |

2.0

PAR16 max. 15W | GU10  
100-240VAC | 50-60Hz  
wet painted steel and aluminium  
incl. cable in the same colour as  
the lamp body | black plug with  
switch for black cable otherwise  
transparent plug with switch

4.50kg IP20 45°/45° 30°/30°

mounting  
cable plug with hand switch

| CODE |         |
|------|---------|
|      | 639120B |



ALWAYS USE

no shade

| CODE |    |
|------|----|
|      | 00 |

shade 1.0 | Ø205mm

| CODE      |    |
|-----------|----|
|           | B1 |
|           | K1 |
| grey felt | F1 |

OPTIONAL



PAR16 LED GU10 7W | phase-cut dim  
2700K | 360lm

| CODE |          |
|------|----------|
|      | 901228W3 |
|      | 901228B3 |

more lamps and specs on page 701




HOTEL ROTTERDAM | NETHERLANDS

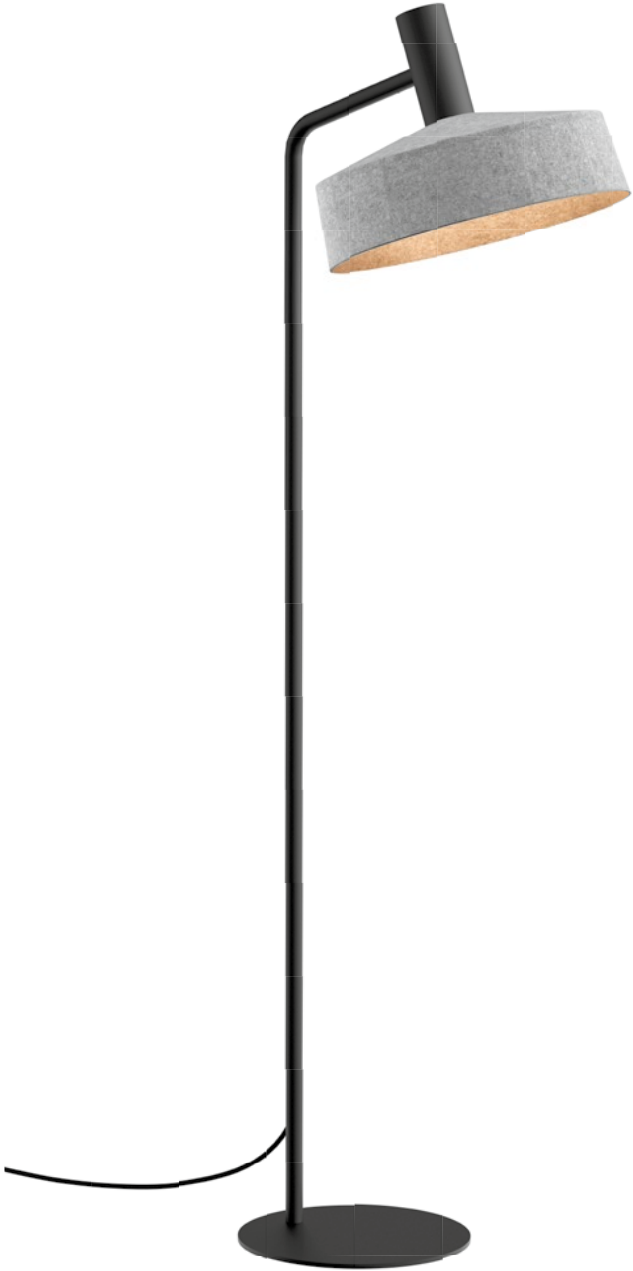

**1.0**  
PAR16 max. 15W | GU10  
100-240VAC | 50-60Hz  
wet painted steel and aluminium

5.60kg IP20 45°/45° 30°/30°

mounting  
black cable plug with floor switch  
CODE  
638120B\_\_



ROOMOR  
FLOOR SURFACE



ALWAYS USE

no shade  
CODE  
00

shade 1.0 | Ø205mm  
CODE  
B1  
K1  
grey felt F1

shade 2.0 | Ø250mm  
CODE  
B2  
K2  
grey felt F2

shade 3.0 | Ø405mm  
CODE  
B3  
K3  
grey felt F3

overview on page 31

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim  
2700K | 360lm  
CODE  
901228B3

more lamps and specs on page 701





DESIGNER

“We want to instill soul, to imbue products with emotional added value.”

ANASTASIA SU & MARTIN LESJAK, 13&9 DESIGN

Anastasia Su and Martin Lesjak from the studio 13&9 are completely focused on “transferring the creative energy of a brand to the product itself”. This approach is also reflected in the three collections that the Austrian design team has created exclusively for Wever & Ducré.

First and foremost: the natural shale veneer of ROCK with its expressive character and varying degrees of transparency, which makes every luminaire completely unique. And DRO, for which the two designers have succeeded in permanently capturing the fleeting beauty of a dewdrop. “We dealt intensively with the so-called hydrophobic effect when designing this luminaire,” explains Anastasia Su. “It causes water to bead off or adhere to the surface, thus creating nestling or upright shapes – an aesthetic that made a special impression on us.” Besides finding inspiration in nature, 13&9 also draws upon an abundance of other creative realms such as art, fashion, and architecture – a transdisciplinary approach that is articulated so eloquently in the MIRRO collection designed together with Sabrina Stadlober. Both the beholder and the surroundings can be mirrored simultaneously in the reflective metallic surface of the luminaires. A masterful technique that 13&9 employs to create an intense connection between user and product. And that is exactly what makes all of the pieces designed by 13&9 so fascinating.



Anastasia Su und Martin Lesjak vom Studio 13&9 konzentrieren sich ganz darauf, „die kreative Energie einer Marke auf das Produkt zu übertragen“. Dieser Ansatz spiegelt sich auch in den insgesamt drei Kollektionen wider, die das österreichische Designteam exklusiv für Wever & Ducré entworfen hat. Allen voran: die charakterstarke ROCK, deren unterschiedlich transparentes Schieferfurnier jede Leuchte zu einem absoluten Unikat macht. Aber auch DRO, mit der es den beiden Designern gelungen ist, die flüchtige Schönheit eines Tautropfens dauerhaft einzufangen. „Für diese Leuchte haben wir uns intensiv mit dem sogenannten hydrophoben Effekt auseinandergesetzt.“, erklärt Anastasia Su. „Er bewirkt, dass Wasser abperlt oder anhaftet, und lässt dadurch sich anschmiegende oder stehende Formen entstehen. Eine Ästhetik, die uns besonders beeindruckt hat.“

Inspirieren lassen sich 13&9 aber nicht nur von der Natur, sondern auch von vielen anderen Kreativbereichen wie Kunst, Mode oder Architektur. Eine transdisziplinäre Herangehensweise, die bei der mit Designerin Sabrina Stadlober entworfenen Kollektion MIRRO besonders schön zum Ausdruck kommt. Gleichzeitig können sich Betrachter und Umgebung in der metallisch-reflektierenden Oberfläche der Leuchten spiegeln. Ein gekonnter Kunstgriff, mit dem 13&9 eine intensive Verbindung zwischen Benutzer und Produkt herstellen. Und genau das ist es auch, was die besondere Faszination aller von 13&9 entworfenen Objekte ausmacht.





MIRRO  
CEILING SURFACE

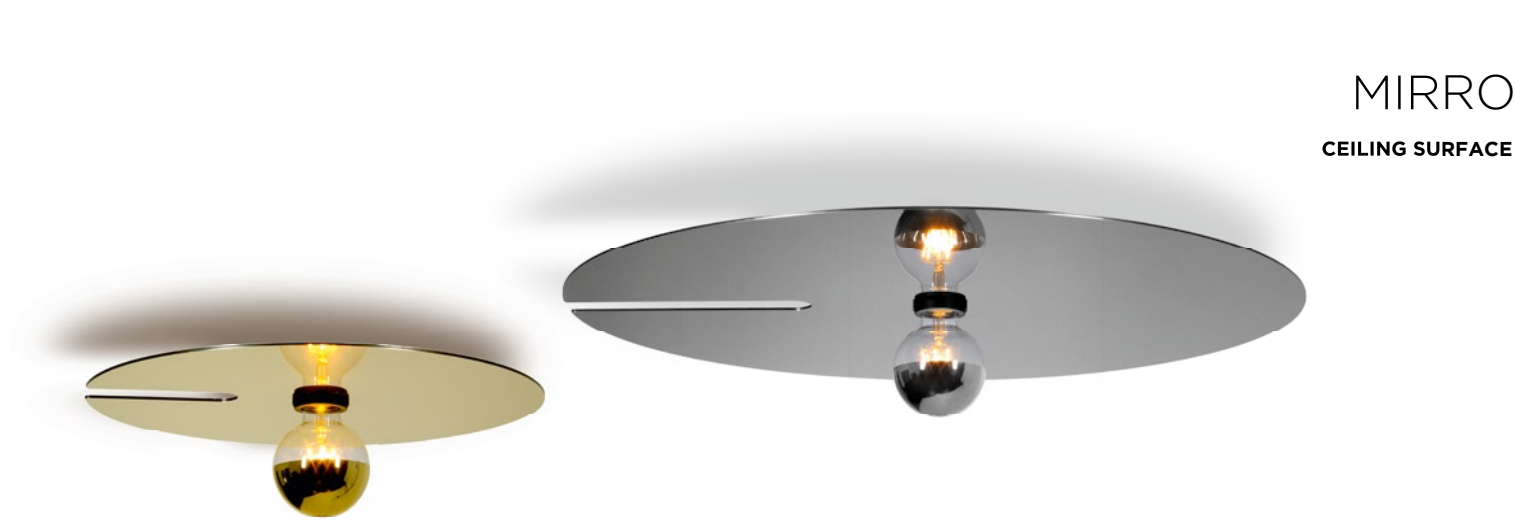

1.0

LED A60 max. 15W | E27  
220-240VAC | 50-60Hz  
aluminium | single side reflective  
aluminium composite panel

0.70kg IP20

|  | CODE      |
|--|-----------|
|  | 6321E8GB0 |
|  | 6321E8NB0 |


OPTIONAL

A60 LED E27 6W | gold mirror

|               | CODE     |
|---------------|----------|
| 2200K   400lm | 9003E150 |
| 2700K   500lm | 9003E139 |

A60 LED E27 6W | silver mirror

|               | CODE     |
|---------------|----------|
| 2700K   500lm | 9003E140 |



2.0

LED G95 max. 15W | E27  
220-240VAC | 50-60Hz  
aluminium | single side reflective  
aluminium composite panel

1.00kg IP20

|  | CODE      |
|--|-----------|
|  | 6322E8GB0 |
|  | 6322E8NB0 |


OPTIONAL

G95 LED E27 6W | gold mirror

|               | CODE     |
|---------------|----------|
| 2200K   400lm | 9003E151 |
| 2700K   500lm | 9003E142 |

G95 LED E27 6W | silver mirror

|               | CODE     |
|---------------|----------|
| 2700K   500lm | 9003E149 |



3.0

LED G95 max. 15W | E27  
220-240VAC | 50-60Hz  
aluminium | single side reflective  
aluminium composite panel

2.10kg IP20

|  | CODE      |
|--|-----------|
|  | 6323E8GB0 |
|  | 6323E8NB0 |

OPTIONAL

G95 LED E27 6W | gold mirror

|               | CODE     |
|---------------|----------|
| 2200K   400lm | 9003E151 |
| 2700K   500lm | 9003E142 |

G95 LED E27 6W | silver mirror

|               | CODE     |
|---------------|----------|
| 2700K   500lm | 9003E149 |







RESTAURANT ROOTS KNOCKE-HEIST | BELGIUM




1.0 EXTENDED

LED A60 4-15W | E27  
220-240VAC | 50-60Hz  
aluminium | single side reflective  
aluminium composite panel

0.70kg IP20 35°/35°

| CODE                                                                                 |           |
|--------------------------------------------------------------------------------------|-----------|
|   | 6331E8GB0 |
|  | 6331E8NB0 |

cable plug with dimmer



OPTIONAL

A60 LED E27 6W | gold mirror

| CODE          |          |
|---------------|----------|
| 2200K   400lm | 9003E150 |
| 2700K   500lm | 9003E139 |

A60 LED E27 6W | silver mirror

| CODE          |          |
|---------------|----------|
| 2700K   500lm | 9003E140 |

1.0

LED A60 max. 15W | E27  
220-240VAC | 50-60Hz  
aluminium | single side reflective  
aluminium composite panel

0.70kg IP20

| CODE                                                                                 |           |
|--------------------------------------------------------------------------------------|-----------|
|   | 6321E8GB0 |
|  | 6321E8NB0 |

OPTIONAL

A60 LED E27 6W | gold mirror

| CODE          |          |
|---------------|----------|
| 2200K   400lm | 9003E150 |
| 2700K   500lm | 9003E139 |

A60 LED E27 6W | silver mirror

| CODE          |          |
|---------------|----------|
| 2700K   500lm | 9003E140 |

2.0

LED G95 max. 15W | E27  
220-240VAC | 50-60Hz  
aluminium | single side reflective  
aluminium composite panel

1.00kg IP20

| CODE                                                                                 |           |
|--------------------------------------------------------------------------------------|-----------|
|   | 6322E8GB0 |
|  | 6322E8NB0 |

OPTIONAL

G95 LED E27 6W | gold mirror

| CODE          |          |
|---------------|----------|
| 2200K   400lm | 9003E151 |
| 2700K   500lm | 9003E142 |

G95 LED E27 6W | silver mirror

| CODE          |          |
|---------------|----------|
| 2700K   500lm | 9003E149 |

3.0

LED G95 max. 15W | E27  
220-240VAC | 50-60Hz  
aluminium | single side reflective  
aluminium composite panel

2.10kg IP20

| CODE                                                                                 |           |
|--------------------------------------------------------------------------------------|-----------|
|   | 6323E8GB0 |
|  | 6323E8NB0 |

OPTIONAL


G95 LED E27 6W | gold mirror

| CODE          |          |
|---------------|----------|
| 2200K   400lm | 9003E151 |
| 2700K   500lm | 9003E142 |


G95 LED E27 6W | silver mirror

| CODE          |          |
|---------------|----------|
| 2700K   500lm | 9003E149 |

MIRRO  
WALL SURFACE





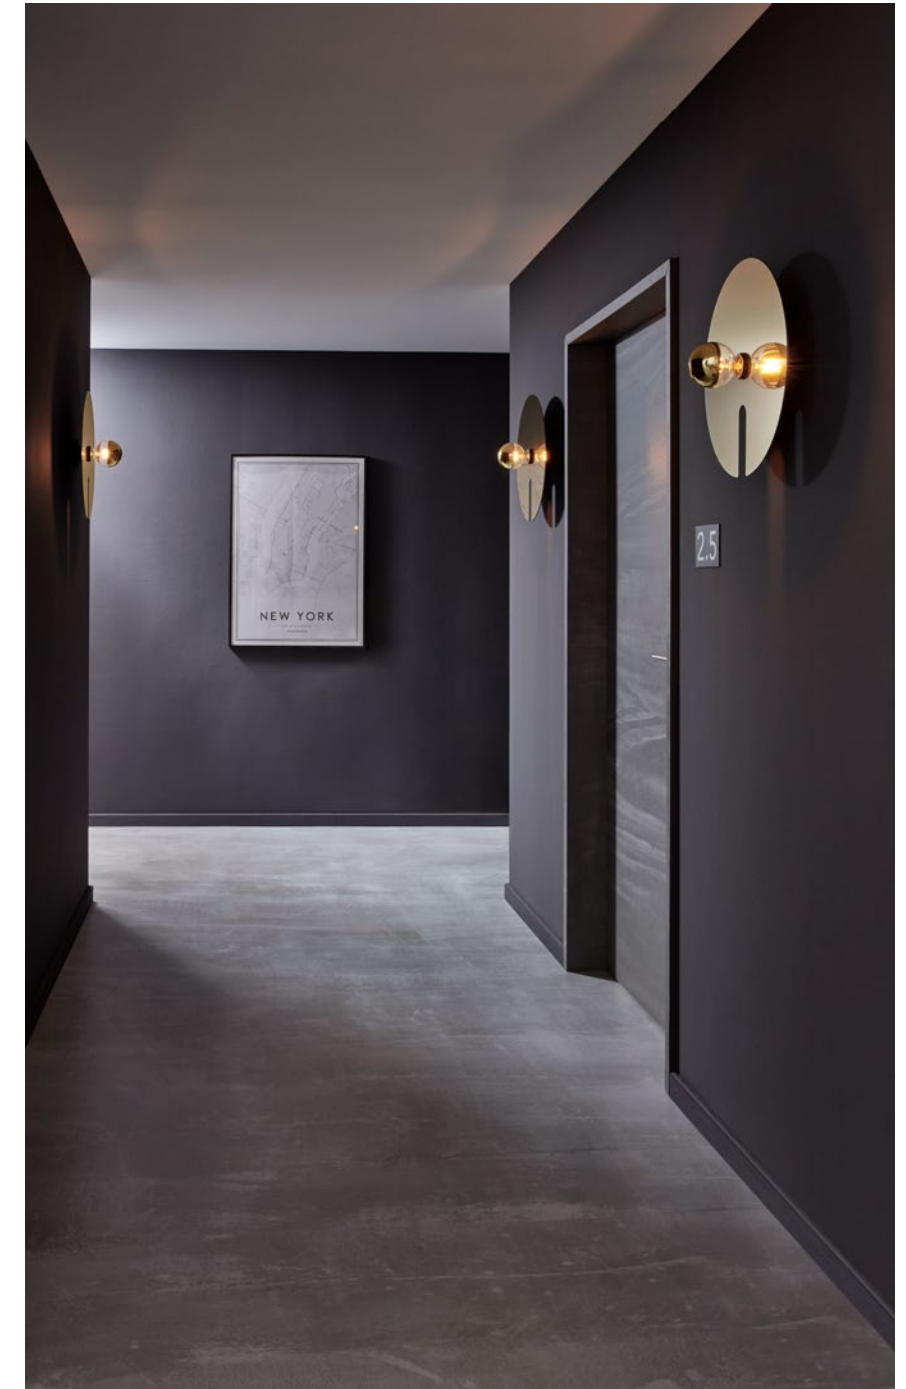





HOTEL NEW YORK | USA

MIRRO  
TABLE




1.0

LED A60 4-15W | E27  
220-240VAC | 50-60Hz  
aluminium | single side reflective  
aluminium composite panel

1.30kg IP20

| CODE                                                                                 |           |
|--------------------------------------------------------------------------------------|-----------|
|   | 6301E8GB0 |
|  | 6301E8NB0 |

cable plug with dimmer



OPTIONAL

| A60 LED E27 6W   gold mirror   |  | CODE     |
|--------------------------------|--|----------|
| 2200K   400lm                  |  | 9003E150 |
| 2700K   500lm                  |  | 9003E139 |
| A60 LED E27 6W   silver mirror |  | CODE     |
| 2700K   500lm                  |  | 9003E140 |








# MIRRO

## FLOOR SURFACE




2.0

LED G95 max. 15W | E27  
220-240VAC | 50-60Hz  
aluminium | single side reflective  
aluminium composite panel

3.30kg IP20

| CODE                                                                                 |           |
|--------------------------------------------------------------------------------------|-----------|
|   | 6311E8GB0 |
|  | 6311E8NB0 |

cable plug with dimmer




### OPTIONAL

G95 LED E27 6W | gold mirror

| CODE          |          |
|---------------|----------|
| 2200K   400lm | 9003E151 |
| 2700K   500lm | 9003E142 |

G95 LED E27 6W | silver mirror

| CODE          |          |
|---------------|----------|
| 2700K   500lm | 9003E149 |




3.0

LED G95 max. 15W | E27  
220-240VAC | 50-60Hz  
aluminium | single side reflective  
aluminium composite panel

3.70kg IP20

| CODE                                                                                 |           |
|--------------------------------------------------------------------------------------|-----------|
|   | 6312E8GB0 |
|  | 6312E8NB0 |

cable plug with dimmer



### OPTIONAL

G95 LED E27 6W | gold mirror

| CODE          |          |
|---------------|----------|
| 2200K   400lm | 9003E151 |
| 2700K   500lm | 9003E142 |

G95 LED E27 6W | silver mirror

| CODE          |          |
|---------------|----------|
| 2700K   500lm | 9003E149 |



PRIVATE RESIDENCE NETHERLANDS



Italian hand blown glass

DRO  
CEILING SURFACE



1.0

LED QT14 max. 5W | G9  
220-240VAC | 50-60Hz  
white/brown opal glass hand blown  
aluminium powder coated

0.60kg IP20

| CODE |           |
|------|-----------|
|      | 1721G0WB0 |
|      | 1721G0YB0 |

OPTIONAL

QT14 LED 3.5W dim

| CODE          |          |
|---------------|----------|
| 2800K   300lm | 9019G802 |
| 3000K   330lm | 9019G804 |

more lamps and specs on page 703



2.0

LED C35 max. 6W | E14  
220-240VAC | 50-60Hz  
white/brown opal glass hand blown  
aluminium powder coated

1.20kg IP20


| CODE |           |
|------|-----------|
|      | 1722C0WB0 |
|      | 1722C0YB0 |

OPTIONAL

C35 LED E14 6W opal | phase-cut dim

| CODE          |          |
|---------------|----------|
| 2700K   450lm | 9003C103 |

more lamps and specs on page 703



3.0

LED A60 max. 12W | E27  
220-240VAC | 50-60Hz  
white/brown opal glass hand blown  
aluminium powder coated

2.70kg IP20

| CODE |           |
|------|-----------|
|      | 1723E0WB0 |
|      | 1723E0YB0 |

OPTIONAL

A60 LED E27 9W | phase-cut dim

| CODE          |          |
|---------------|----------|
| 2700K   800lm | 9003E152 |


more lamps and specs on page 703





Italian hand blown glass

DRO  
CEILING SUSPENDED



1.0

LED QT14 max. 5W | G9  
220-240VAC | 50-60Hz  
white/brown opal glass hand blown  
aluminium powder coated  
black textile cable

0.70kg IP20


| CODE |           |
|------|-----------|
|      | 2521G0WB0 |
|      | 2521G0YB0 |

OPTIONAL

QT14 LED 3.5W dim

| CODE          |          |
|---------------|----------|
| 2800K   300lm | 9019G802 |
| 3000K   330lm | 9019G804 |

more lamps and specs on page 703



2.0

LED C35 max. 6W | E14  
220-240VAC | 50-60Hz  
white/brown opal glass hand blown  
aluminium powder coated  
black textile cable

1.30kg IP20


| CODE |           |
|------|-----------|
|      | 2522C0WB0 |
|      | 2522C0YB0 |

OPTIONAL

C35 LED E14 6W opal | phase-cut dim

| CODE          |          |
|---------------|----------|
| 2700K   450lm | 9003C103 |

more lamps and specs on page 703



3.0

LED A60 max. 12W | E27  
220-240VAC | 50-60Hz  
white/brown opal glass hand blown  
aluminium powder coated  
black textile cable

2.70kg IP20


| CODE |           |
|------|-----------|
|      | 2523E0WB0 |
|      | 2523E0YB0 |

OPTIONAL

A60 LED E27 9W opal | phase-cut dim

| CODE          |          |
|---------------|----------|
| 2700K   800lm | 9003E152 |

more lamps and specs on page 703



4.0

LED A60 max. 15W | E27  
220-240VAC | 50-60Hz  
white/brown opal glass hand blown  
aluminium powder coated  
black textile cable

4.10kg IP20

| CODE |           |
|------|-----------|
|      | 2524E0WB0 |
|      | 2524E0YB0 |

OPTIONAL

A60 LED E27 15W opal | phase-cut dim

| CODE           |          |
|----------------|----------|
| 2700K   1400lm | 9003E153 |

more lamps and specs on page 703





SHOWROOM VANDEWIELE | FIVE AM MARKE | BELGIUM



FAIR LIGHTLAB | BELGIUM






PRIVATE RESIDENCE SWITZERLAND



Italian hand blown glass

DRO  
WALL SURFACE




1.0

LED QT14 max. 5W | G9  
220-240VAC | 50-60Hz  
white/brown opal glass hand blown  
aluminium powder coated

0.60kg IP44

| CODE     |  |
|----------|--|
| 3431GOW0 |  |
| 3431GOY0 |  |




2.0

LED C35 max. 6W | E14  
220-240VAC | 50-60Hz  
white/brown opal glass hand blown  
aluminium powder coated

1.20kg IP44

| CODE     |  |
|----------|--|
| 3432COW0 |  |
| 3432COY0 |  |




1.0 COMP

3x LED QT14 max. 5W | G9  
220-240VAC | 50-60Hz  
white/brown opal glass hand blown  
aluminium powder coated  
black textile cable

2.50kg IP20 35°/35°

| CODE      |  |
|-----------|--|
| 3441GOWB0 |  |
| 3441GOYB0 |  |

cable plug with dimmer



OPTIONAL

QT14 LED 3.5W dim

| CODE          |          |
|---------------|----------|
| 2800K   300lm | 9019G802 |
| 3000K   330lm | 9019G804 |

more lamps and specs on page 703

OPTIONAL

C35 LED E14 6W opal | phase-cut dim

| CODE          |          |
|---------------|----------|
| 2700K   450lm | 9003C103 |

more lamps and specs on page 703

OPTIONAL

QT14 LED 3.5W dim

| CODE          |          |
|---------------|----------|
| 2800K   300lm | 9019G802 |
| 3000K   330lm | 9019G804 |

more lamps and specs on page 703








1.0

LED QT14 max. 5W | G9  
220-240VAC | 50-60Hz  
white/brown opal glass hand blown  
aluminium powder coated  
black textile cable

0.75kg IP20

|  | CODE      |
|--|-----------|
|  | 6421G0WB0 |
|  | 6421G0YB0 |

cable plug with switch




OPTIONAL

QT14 LED 3.5W dim

|               | CODE     |
|---------------|----------|
| 2800K   300lm | 9019G802 |
| 3000K   330lm | 9019G804 |

more lamps and specs on page 703




2.0

LED C35 4-6W | E14  
220-240VAC | 50-60Hz  
white/brown opal glass hand blown  
aluminium powder coated  
black textile cable

1.30kg IP20

|  | CODE      |
|--|-----------|
|  | 6422C0WB0 |
|  | 6422C0YB0 |

cable plug with dimmer




OPTIONAL

C35 LED E14 6W opal | phase-cut dim

|               | CODE     |
|---------------|----------|
| 2700K   450lm | 9003C103 |

more lamps and specs on page 703




3.0

LED A60 4-12W | E27  
220-240VAC | 50-60Hz  
white/brown opal glass hand blown  
aluminium powder coated  
black textile cable

2.30kg IP20

|  | CODE      |
|--|-----------|
|  | 6423E0WB0 |
|  | 6423E0YB0 |

cable plug with dimmer




OPTIONAL

A60 LED E27 9W | phase-cut dim

|               | CODE     |
|---------------|----------|
| 2700K   800lm | 9003E152 |


more lamps and specs on page 703



Italian hand blown glass




PRIVATE RESIDENCE GERMANY



Italian hand blown glass

DRO  
TABLE




2.0

LED C35 4-6W | E14  
220-240VAC | 50-60Hz  
opal glass hand blown  
aluminium steel powder coated  
black textile cable

2.30kg IP20


| CODE |           |
|------|-----------|
|      | 6432C0WB0 |
|      | 6432C0YB0 |

cable plug with dimmer



OPTIONAL

C35 LED E14 6W opal | phase-cut dim  
CODE  
2700K | 450lm 9003C103  
more lamps and specs on page 703




3.0

LED A60 4-12W | E27  
220-240VAC | 50-60Hz  
opal glass hand blown  
aluminium steel powder coated  
black textile cable

3.30kg IP20

| CODE |           |
|------|-----------|
|      | 6433E0WB0 |
|      | 6433E0YB0 |



cable plug with dimmer



OPTIONAL


A60 LED E27 9W opal | phase-cut dim  
CODE  
2700K | 800lm 9003E152  
more lamps and specs on page 703



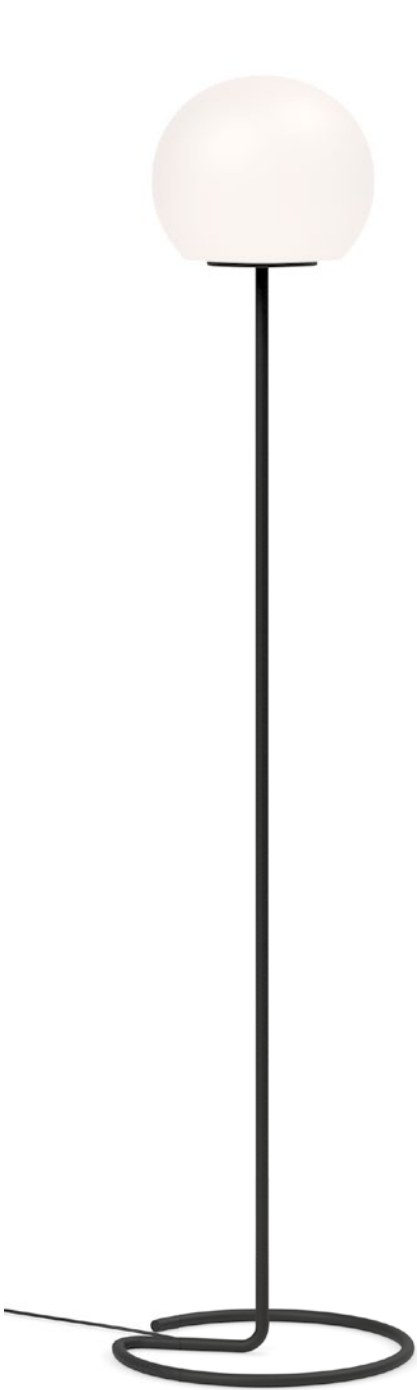

Italian hand blown glass

DRO  
FLOOR SURFACE




3.0

LED A60 4-12W | E27  
220-240VAC | 50-60Hz  
opal glass hand blown  
aluminium steel powder coated  
black textile cable

5.00kg IP20

| CODE                                                                                  |           |
|---------------------------------------------------------------------------------------|-----------|
|  | 6442E0WB0 |
|  | 6442E0YB0 |


cable plug with dimmer



OPTIONAL

A60 LED E27 9W opal | phase-cut dim

| CODE                             |          |
|----------------------------------|----------|
| 2700K   800lm                    | 9003E152 |
| more lamps and specs on page 703 |          |




1.0 COMP

3x LED QT14 max. 5W | G9  
220-240VAC | 50-60Hz  
opal glass hand blown  
aluminium steel powder coated  
black textile cable

4.60kg IP20

| CODE                                                                                  |           |
|---------------------------------------------------------------------------------------|-----------|
|  | 6443G0WB0 |
|  | 6443G0YB0 |

cable plug with dimmer



OPTIONAL

QT14 LED 3.5W dim

| CODE                             |          |
|----------------------------------|----------|
| 2800K   300lm                    | 9019G802 |
| 3000K   330lm                    | 9019G804 |
| more lamps and specs on page 703 |          |






THE ASH RESTAURANT | ÖZEN-REIMER ARCHITEKTEN | LICHT KUNST LICHT AG TROISDORF | GERMANY

# ROCK COLLECTION

CEILING SUSPENDED




3.0

A60 max. 100W | E26-E27  
220-240VAC | 50-60Hz  
stone veneer | MDF lacquered  
black textile cable

3-5kg IP20 0.3m

| Ø370mm | CODE     |
|--------|----------|
|        | 2201E8W0 |
|        | 2201E8D0 |
| Ø560mm | CODE     |
|        | 2203E8W0 |
|        | 2203E8D0 |
| Ø740mm | CODE     |
|        | 2205E8W0 |
|        | 2205E8D0 |



4.0

A60 max. 100W | E26-E27  
220-240VAC | 50-60Hz  
stone veneer | MDF lacquered  
black textile cable

3.5-5.5kg IP20 0.3m

| Ø370mm | CODE     |
|--------|----------|
|        | 2202E8W0 |
|        | 2202E8D0 |
| Ø560mm | CODE     |
|        | 2204E8W0 |
|        | 2204E8D0 |
| Ø740mm | CODE     |
|        | 2206E8W0 |
|        | 2206E8D0 |

## OPTIONAL

A60 LED E27 6W dim

|               | CODE     |
|---------------|----------|
| 2200K   315lm | 9003E109 |
| 2700K   500lm | 9003E138 |

G95 LED E27 6W dim

|               |          |
|---------------|----------|
| 2200K   450lm | 9003E111 |
|---------------|----------|

G95 LED E27 12W phase-cut dim opal  
2700K | 1000lm

9003E154

more lamps and specs on page 703

## OPTIONAL

A60 LED E27 6W dim

|               | CODE     |
|---------------|----------|
| 2200K   315lm | 9003E109 |
| 2700K   500lm | 9003E138 |



G95 LED E27 6W dim

|               |          |
|---------------|----------|
| 2200K   450lm | 9003E111 |
|---------------|----------|

G95 LED E27 12W phase-cut dim opal  
2700K | 1000lm

9003E154

more lamps and specs on page 703



Stone is a pure natural product, there may be deviations from the pictures in structure and colour.






CLUBHOUSE FONTANA | INNOCAD ARCHITEKTUR ZT GMBH OBERWALTERSDORF | AUSTRIA




PRO MEDICO | INNOCAD ARCHITEKTUR ZT GMBH GRAZ | AUSTRIA



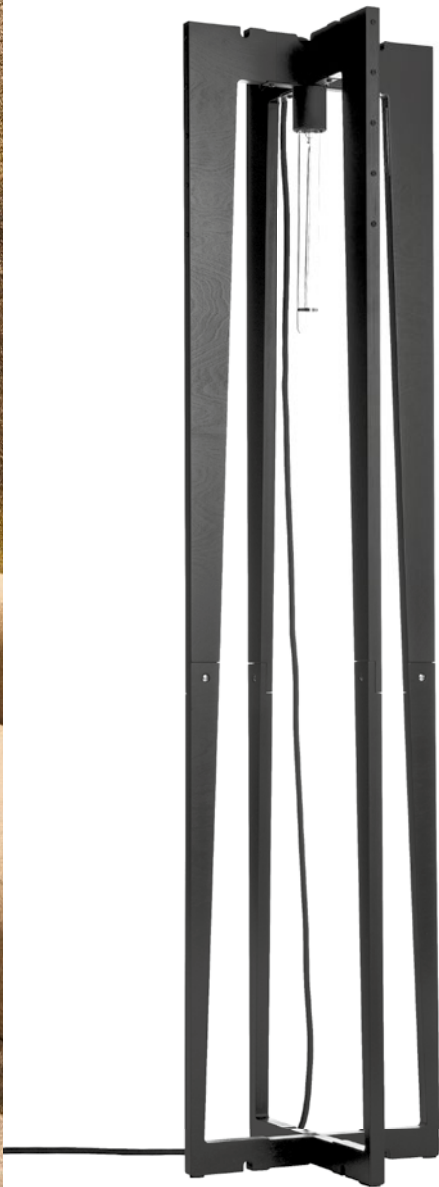

# ROCK COLLECTION

FLOOR SURFACE




## 1.0 NAKED

E27 max. 100W  
220-240VAC | 50-60Hz  
MDF lacquered  
black textile cable

5.00kg IP20 0.3

CODE  
2223E800

cable plug with dimmer




## OPTIONAL

T32-300 carbon filament E27 15W  
CODE  
2200K | 50lm 9003E127

T30-300 LED E27 6W dim  
CODE  
2200K | 550lm 9003E130  
2700K | 550lm 9003E135

more lamps and specs on page 704




## 6.0

LED A60 4-25W | E27  
220-240VAC | 50-60Hz  
stone veneer | MDF lacquered  
black textile cable

6.00kg IP20 0.3

CODE  
2221E8W0  
2221E8D0

cable plug with dimmer




## OPTIONAL

A60 LED E27 6W dim  
CODE  
2200K | 315lm 9003E109  
2700K | 500lm 9003E138

G95 LED E27 6W dim  
CODE  
2200K | 450lm 9003E111

G95 LED E27 12W phase-cut dim opal  
CODE  
2700K | 1000lm 9003E154

more lamps and specs on page 703




## 7.0

LED A60 4-25W | E27  
220-240VAC | 50-60Hz  
stone veneer | MDF lacquered  
black textile cable

7.00kg IP20 0.3

CODE  
2222E8W0  
2222E8D0

cable plug with dimmer




## OPTIONAL

A60 LED E27 6W dim  
CODE  
2200K | 315lm 9003E109  
2700K | 500lm 9003E138

G95 LED E27 6W dim  
CODE  
2200K | 450lm 9003E111

G95 LED E27 12W phase-cut dim opal  
CODE  
2700K | 1000lm 9003E154

more lamps and specs on page 703




## 8.0

LED A60 4-25W | E27  
220-240VAC | 50-60Hz  
stone veneer | MDF lacquered  
black textile cable

3.50kg IP20 0.3

CODE  
2241E8W0  
2241E8D0

cable plug with dimmer



## OPTIONAL

A60 LED E27 6W dim  
CODE  
2200K | 315lm 9003E109  
2700K | 500lm 9003E138

G95 LED E27 6W dim  
CODE  
2200K | 450lm 9003E111

G95 LED E27 12W phase-cut dim opal  
CODE  
2700K | 1000lm 9003E154

more lamps and specs on page 703





HAIRDRESSER ZEITGEIST | INNOCAD ARCHITEKTUR ZT GMBH GRAZ | AUSTRIA



CLUBHOUSE FONTANA | INNOCAD ARCHITEKTUR ZT GMBH OBERWALTERSDORF | AUSTRIA





DESIGNER

“Design is good if it brings something new and timeless to the world.”


BERND STEINHUBER



And with WIRO, Bernd Steinhuber has accomplished exactly that. What inspires the Austrian designer, who was born in 1972, the most? Plainly said: Everything. Therefore, his little sketchbook is his constant companion. “Ideas are fleeting,” he says, “and they don’t stick to office hours.” That’s an attitude we truly admire. After all, the most beautiful things are often found when you are not looking for them. So keep your eyes open.

Und das ist Bernd Steinhuber mit der WIRO auf jeden Fall gelungen. Wovon sich der 1972 geborene Designer am liebsten inspirieren lässt? Von allem, was ihm begegnet. Darum ist sein kleines Skizzenbuch auch sein steter Begleiter. „Ideen sind flüchtig und halten sich nicht an Bürozeiten.“ Eine Einstellung, die uns gut gefällt. Denn die schönsten Dinge findet man bekanntlich meist dann, wenn man nicht nach ihnen sucht. Also: Keep your eyes open.





SUSPENSION SINGLE


E27 | connector set for one shade  
round ceiling base | black textile cable  
shade not included

for shades without steel wire  
max. 4.0kg

|      | CODE     |
|------|----------|
| 2.6m | 90015171 |
| 6.0m | 90015172 |

for shades with steel wire


|      | CODE     |
|------|----------|
| 2.6m | 90015175 |
| 6.0m | 90015176 |



DECENTER 1.0

E27 | connector set for one shade  
round ceiling base | black textile cable  
cable shade not included | 1 base +  
1 endstop included | max 4.0kg


|                             | CODE     |
|-----------------------------|----------|
| 6.0m suspension on page 712 | 90052050 |



DECENTER 2.0

E27 | connector set for two shades  
round ceiling base | black textile cable  
shades not included | 1 multibase  
+ 2 endstops included  
max 4.0kg per shade

|                             | CODE     |
|-----------------------------|----------|
| 6.0m suspension on page 712 | 90052055 |




DECENTER 3.0-8.0

E27 | connector set for 3 to max. 8  
shades round ceiling base | black  
textile cable | shades not included  
2.6m | 1 multibase + 3-8 endstops  
included | max 4.0kg per shade

|       | CODE     |
|-------|----------|
| for 3 | 90052060 |
| for 4 | 90052067 |
| for 5 | 90052068 |
| for 6 | 90052069 |
| for 7 | 90052070 |
| for 8 | 90052071 |


6.0m suspension on page 712



PLUG + PLAY

E27 LED 4-25W | connector set for  
one shade | black textile cable | incl.  
cable plug with dimmer | shade not  
included | 2 cable brackets included  
max 4.0kg

|                        | CODE     |
|------------------------|----------|
| cable plug with dimmer | 90015165 |



WIRO  
SUSPENSION SYSTEM






RESTAURANT DE DRIE FONTEINEN | TAILORMATE IN COOPERATION WITH ALKEN MAES VILVOORDE | BELGIUM

WIRO  
CEILING SUSPENDED



ø187



ø187

1.8 WIRO

A60 max. 60W | E27  
220-240VAC | 50-60Hz  
varnished steel | lacquered

1.15kg | ~0.3°D | IP20

shade only

|       | CODE     |
|-------|----------|
| rust  | 209200V0 |
| black | 209200B0 |

OPTIONAL

A60 carbon filament E27 15W

|              | CODE     |
|--------------|----------|
| 2200K   50lm | 9003E124 |

T32-180 carbon filament E27 15W

|              | CODE     |
|--------------|----------|
| 2200K   50lm | 9003E106 |

T30-225 LED E27 6W

|               | CODE     |
|---------------|----------|
| 2200K   450lm | 9003E129 |
| 2700K   500lm | 9003E136 |

more lamps and specs on page 703



ø210



ø210

2.0 WIRO

A60 max. 60W | E27  
220-240VAC | 50-60Hz  
varnished steel | lacquered

0.35kg | ~0.3°D | IP20

shade only

|       | CODE     |
|-------|----------|
| rust  | 209600V0 |
| black | 209600B0 |

OPTIONAL

A60 LED E27 6W dim

|               | CODE     |
|---------------|----------|
| 2200K   315lm | 9003E109 |
| 2700K   500lm | 9003E138 |


A60 carbon filament E27 15W

|              | CODE     |
|--------------|----------|
| 2200K   50lm | 9003E124 |

more lamps and specs on page 703



ø387



ø387

3.8 WIRO

A60 max. 60W | E27  
220-240VAC | 50-60Hz  
varnished steel | lacquered

2.35kg | ~0.3°D | IP20

shade only

|       | CODE     |
|-------|----------|
| rust  | 209300V0 |
| black | 209300B0 |

OPTIONAL

A60 LED E27 6W dim

|               | CODE     |
|---------------|----------|
| 2200K   315lm | 9003E109 |
| 2700K   500lm | 9003E138 |

A60 carbon filament E27 15W

|              | CODE     |
|--------------|----------|
| 2200K   50lm | 9003E124 |

T30-225 LED E27 6W

|               | CODE     |
|---------------|----------|
| 2200K   450lm | 9003E129 |
| 2700K   500lm | 9003E136 |

more lamps and specs on page 703

ALWAYS USE

**Suspension single**  
connector set for one shade | max 4.0kg  
round ceiling base | no steel wire

|      | CODE     |
|------|----------|
| 2.6m | 90015171 |
| 6.0m | 90015172 |

more information on page 91

**Plug + Play** | connector set for one  
shade | incl. cable plug with dimmer  
max 4.0kg

|  | CODE     |
|--|----------|
|  | 90015165 |

**Decenter 1.0-8.0**  
connector set for 1 to max. 8 shades  
round ceiling base | 2.6m  
max 4.0kg per shade

|       | CODE     |
|-------|----------|
| for 1 | 90052050 |
| for 2 | 90052055 |
| for 3 | 90052060 |
| for 4 | 90052067 |
| for 5 | 90052068 |
| for 6 | 90052069 |
| for 7 | 90052070 |
| for 8 | 90052071 |










RESTAURANT MARCHÉ 17 TURNHOUT | BELGIUM

WIRO  
CEILING SUSPENDED

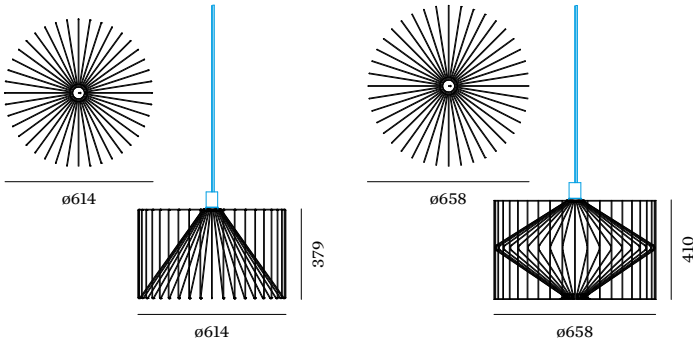

6.1 WIRO

A60 max. 60W | E27  
220-240VAC | 50-60Hz  
varnished steel | lacquered

2.70kg 0.3m IP20

shade only

|         | CODE     |
|---------|----------|
| rust V  | 209400V0 |
| black B | 209400B0 |

OPTIONAL

A60 LED E27 6W dim

|               | CODE     |
|---------------|----------|
| 2200K   315lm | 9003E109 |
| 2700K   500lm | 9003E138 |

T30-300 LED E27 8W

|               | CODE     |
|---------------|----------|
| 2200K   550lm | 9003E130 |
| 2700K   550lm | 9003E135 |

ST64 carbon filament E27 15W

|              | CODE     |
|--------------|----------|
| 2200K   50lm | 9003E105 |

more lamps and specs on page 703

6.5 WIRO

A60 max. 60W | E27  
220-240VAC | 50-60Hz  
varnished steel | lacquered

3.85kg 0.3m IP20

shade only

|         | CODE     |
|---------|----------|
| rust V  | 209500V0 |
| black B | 209500B0 |

OPTIONAL

A60 LED E27 6W dim

|               | CODE     |
|---------------|----------|
| 2200K   315lm | 9003E109 |
| 2700K   500lm | 9003E138 |

T30-300 LED E27 8W

|               | CODE     |
|---------------|----------|
| 2200K   550lm | 9003E130 |
| 2700K   550lm | 9003E135 |

T32-300 carbon filament E27 15W

|              | CODE     |
|--------------|----------|
| 2200K   50lm | 9003E127 |

more lamps and specs on page 703

ALWAYS USE

**Suspension single**  
connector set for one shade  
round ceiling base | with steel wire

|      | CODE     |
|------|----------|
| 2.6m | 90015175 |
| 6.0m | 90015176 |

more information on page 91

**Plug + Play** | connector set for one  
shade | incl. cable plug with dimmer  
max 4.0kg


|  | CODE     |
|--|----------|
|  | 90015165 |

**Decenter 1.0-8.0**  
connector set for 1 to max. 8 shades  
round ceiling base | 2.6m  
max 4.0kg per shade

|       | CODE     |
|-------|----------|
| for 1 | 90052050 |
| for 2 | 90052055 |
| for 3 | 90052060 |
| for 4 | 90052067 |
| for 5 | 90052068 |
| for 6 | 90052069 |
| for 7 | 90052070 |
| for 8 | 90052071 |







### 1.0 DIAMOND

T30 | max. 60W | E27  
220-240VAC | 50-60Hz  
varnished steel | lacquered

2.82kg ±0.3 IP20


shade only

|  | CODE     |
|--|----------|
|  | 229100P0 |
|  | 229100B0 |

### OPTIONAL

| T30-300 LED E27 8W | CODE     |
|--------------------|----------|
| 2200K   550lm      | 9003E130 |
| 2700K   550lm      | 9003E135 |

| T32-300 carbon filament E27 15W  | CODE     |
|----------------------------------|----------|
| 2200K   50lm                     | 9003E127 |
| more lamps and specs on page 704 |          |



### 1.1 DIAMOND

T30 | max. 60W | E27  
220-240VAC | 50-60Hz  
varnished steel | lacquered

2.00kg ±0.3 IP20

shade only

|  | CODE     |
|--|----------|
|  | 244100P0 |
|  | 244100B0 |

### OPTIONAL

| T30-300 LED E27 8W | CODE     |
|--------------------|----------|
| 2200K   550lm      | 9003E130 |
| 2700K   550lm      | 9003E135 |

| T32-300 carbon filament E27 15W  | CODE     |
|----------------------------------|----------|
| 2200K   50lm                     | 9003E127 |
| more lamps and specs on page 704 |          |

# WIRO

CEILING SUSPENDED

### ALWAYS USE

**Suspension single**  
connector set for one shade  
round ceiling base | with steel wire

|      | CODE     |
|------|----------|
| 2.6m | 90015175 |
| 6.0m | 90015176 |

more information on page 91

**Plug + Play** | connector set for one  
shade | incl. cable plug with dimmer  
max 4.0kg

|  | CODE     |
|--|----------|
|  | 90015165 |

**Decenter 1.0-8.0**  
connector set for 1 to max. 8 shades  
round ceiling base | 2.6m  
max 4.0kg per shade

|       | CODE     |
|-------|----------|
| for 1 | 90052050 |
| for 2 | 90052055 |
| for 3 | 90052060 |
| for 4 | 90052067 |
| for 5 | 90052068 |
| for 6 | 90052069 |
| for 7 | 90052070 |
| for 8 | 90052071 |





AIRBASE HOTEL | STUDIO WG3 & ZT GELDNER | CHRISTINA ZETTL GRAZ | AUSTRIA








RESIDENCE CYPRES | LIGNE V KNOKKE | BELGIUM

WIRO

CEILING SUSPENDED



As awarded by The Chicago Athenaeum:  
Museum of Architecture and Design



2.0 DIAMOND

T30 | max. 60W | E27  
220-240VAC | 50-60Hz  
varnished steel | lacquered

5.08kg ±0.3 IP20


shade only

|  | CODE     |
|--|----------|
|  | 229200P0 |
|  | 229200B0 |

OPTIONAL

| T30-300 LED E27 8W | CODE     |
|--------------------|----------|
| 2200K   550lm      | 9003E130 |
| 2700K   550lm      | 9003E135 |

| T32-300 carbon filament E27 15W  | CODE     |
|----------------------------------|----------|
| 2200K   50lm                     | 9003E127 |
| more lamps and specs on page 704 |          |



3.0 DIAMOND

T30 | max. 60W | E27  
220-240VAC | 50-60Hz  
varnished steel | lacquered

6.50kg ±0.3 IP20


shade only

|  | CODE     |
|--|----------|
|  | 229300P0 |
|  | 229300B0 |

OPTIONAL

| T30-300 LED E27 8W | CODE     |
|--------------------|----------|
| 2200K   550lm      | 9003E130 |
| 2700K   550lm      | 9003E135 |

| T32-300 carbon filament E27 15W  | CODE     |
|----------------------------------|----------|
| 2200K   50lm                     | 9003E127 |
| more lamps and specs on page 704 |          |



4.0 DIAMOND

T30 | max. 60W | E27  
220-240VAC | 50-60Hz  
varnished steel | lacquered

6.00kg ±0.3 IP20

shade only

|  | CODE     |
|--|----------|
|  | 229400P0 |
|  | 229400B0 |

OPTIONAL

| T30-300 LED E27 8W | CODE     |
|--------------------|----------|
| 2200K   550lm      | 9003E130 |
| 2700K   550lm      | 9003E135 |

| T32-300 carbon filament E27 15W  | CODE     |
|----------------------------------|----------|
| 2200K   50lm                     | 9003E127 |
| more lamps and specs on page 704 |          |

ALWAYS USE

**Suspension single**  
connector set for one shade  
round ceiling base | with steel wire

|      | CODE     |
|------|----------|
| 2.6m | 90015175 |
| 6.0m | 90015176 |

more information on page 91












OPTOMETRIST OPTIEK EVELINE | ATELIER EMTEE SCHELDEWINDEKE | BELGIUM



WIRO  
CEILING SUSPENDED



1.0 INDUSTRY

T30 | max. 60W | E27  
220-240VAC | 50-60Hz  
varnished steel | lacquered

3.00kg 0.3m IP20

shade only

|  | CODE     |
|--|----------|
|  | 230100T0 |
|  | 230100B0 |

OPTIONAL

T30-300 LED E27 8W

|               | CODE     |
|---------------|----------|
| 2200K   550lm | 9003E130 |
| 2700K   550lm | 9003E135 |


T32-300 carbon filament E27 15W

|              | CODE     |
|--------------|----------|
| 2200K   50lm | 9003E127 |

T32-180 carbon filament E27 15W

|              | CODE     |
|--------------|----------|
| 2200K   50lm | 9003E106 |

more lamps and specs on page 704



2.0 INDUSTRY

T30 | max. 60W | E27  
220-240VAC | 50-60Hz  
varnished steel | lacquered

4.50kg 0.3m IP20

shade only

|  | CODE     |
|--|----------|
|  | 230200O0 |
|  | 230200B0 |

OPTIONAL

T30-300 LED E27 8W

|               | CODE     |
|---------------|----------|
| 2200K   550lm | 9003E130 |
| 2700K   550lm | 9003E135 |

T32-300 carbon filament E27 15W

|              | CODE     |
|--------------|----------|
| 2200K   50lm | 9003E127 |

more lamps and specs on page 704

ALWAYS USE

Suspension single


connector set for one shade  
round ceiling base | with steel wire

|      | CODE     |
|------|----------|
| 2.6m | 90015175 |
| 6.0m | 90015176 |

more information on page 91



SHOWROOM | GRANDO KEUKENS SINT-MARTENS-LATEM | BELGIUM



1.0 GLOBE

T30 | max. 60W | E27  
220-240VAC | 50-60Hz  
varnished steel | lacquered

5.20kg 0.3m IP20

shade only

|  | CODE     |
|--|----------|
|  | 228100W0 |
|  | 228100R0 |
|  | 228100B0 |

OPTIONAL


T30-300 LED E27 8W

|               | CODE     |
|---------------|----------|
| 2200K   550lm | 9003E130 |
| 2700K   550lm | 9003E135 |

A60 LED E27 6W dim

|               | CODE     |
|---------------|----------|
| 2200K   315lm | 9003E109 |
| 2700K   500lm | 9003E138 |

more lamps and specs on page 703



2.0 GLOBE

A60 max. 60W | E27  
220-240VAC | 50-60Hz  
varnished steel | lacquered

3.80kg 0.3m IP20

shade only

|  | CODE     |
|--|----------|
|  | 228200B0 |

OPTIONAL


A60 LED E27 6W dim

|               | CODE     |
|---------------|----------|
| 2200K   315lm | 9003E109 |
| 2700K   500lm | 9003E138 |

T30-300 LED E27 8W

|               | CODE     |
|---------------|----------|
| 2200K   550lm | 9003E130 |
| 2700K   550lm | 9003E135 |

more lamps and specs on page 703



3.0 GLOBE

A60 max. 60W | E27  
220-240VAC | 50-60Hz  
varnished steel | lacquered

2.30kg 0.3m IP20

shade only

|  | CODE     |
|--|----------|
|  | 228300W0 |
|  | 228300B0 |

OPTIONAL

A60 LED E27 6W dim

|               | CODE     |
|---------------|----------|
| 2200K   315lm | 9003E109 |
| 2700K   500lm | 9003E138 |

ST64 LED E27 6W

|               | CODE     |
|---------------|----------|
| 2200K   450lm | 9003E110 |

more lamps and specs on page 703

ALWAYS USE

Suspension single

connector set for one shade  
round ceiling base | with steel wire

|      | CODE     |
|------|----------|
| 2.6m | 90015175 |
| 6.0m | 90015176 |

more information on page 91





ZENTRUMLAB LA GARINGA | SPAIN



ø300



ø300

#### 4.0 GLOBE

☐ T30 | max. 60W | E27  
220-240VAC | 50-60Hz  
varnished steel | lacquered

☑ 1.30kg ☑ ±0.3" IP20

shade only

|   | CODE     |
|---|----------|
| ☐ | 243100W0 |
| ☑ | 243100V0 |
| ☑ | 243100B0 |

#### OPTIONAL


T30-225 LED E27 6W

|               | CODE     |
|---------------|----------|
| 2200K   450lm | 9003E129 |
| 2700K   500lm | 9003E136 |


T32-180 carbon filament E27 15W

|              | CODE     |
|--------------|----------|
| 2200K   50lm | 9003E106 |

more lamps and specs on page 704



ø450



ø450

#### 5.0 GLOBE

☐ T30 | max. 60W | E27  
220-240VAC | 50-60Hz  
varnished steel | lacquered

☑ 2.70kg ☑ ±0.3" IP20

shade only

|   | CODE     |
|---|----------|
| ☐ | 243200W0 |
| ☑ | 243200V0 |
| ☑ | 243200B0 |

#### OPTIONAL


T30-300 LED E27 8W

|               | CODE     |
|---------------|----------|
| 2200K   550lm | 9003E130 |
| 2700K   550lm | 9003E135 |


T32-300 carbon filament E27 15W

|              | CODE     |
|--------------|----------|
| 2200K   50lm | 9003E127 |

more lamps and specs on page 704



ø550

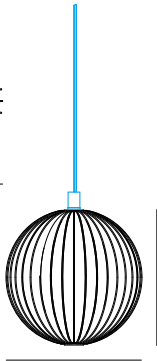

ø550

#### 6.0 GLOBE

☐ T30 | max. 60W | E27  
220-240VAC | 50-60Hz  
varnished steel | lacquered

☑ 3.30kg ☑ ±0.3" IP20

shade only

|   | CODE     |
|---|----------|
| ☐ | 243300W0 |
| ☑ | 243300V0 |
| ☑ | 243300B0 |

#### OPTIONAL

T30-300 LED E27 8W

|               | CODE     |
|---------------|----------|
| 2200K   550lm | 9003E130 |
| 2700K   550lm | 9003E135 |

T32-300 carbon filament E27 15W

|              | CODE     |
|--------------|----------|
| 2200K   50lm | 9003E127 |

more lamps and specs on page 704

# WIRO

CEILING SUSPENDED

#### ALWAYS USE

**Suspension single**  
connector set for one shade  
round ceiling base | with steel wire

|        | CODE     |
|--------|----------|
| ☐ 2.6m | 90015175 |
| ☑ 6.0m | 90015176 |

more information on page 91

**Plug + Play** | connector set for one  
shade | incl. cable plug with dimmer  
max 4.0kg

|   | CODE     |
|---|----------|
| ☐ | 90015165 |

#### Decenter 1.0-8.0

connector set for 1 to max. 8 shades  
round ceiling base | 2.6m  
max 4.0kg per shade

|         | CODE     |
|---------|----------|
| ☐ for 1 | 90052050 |
| ☑ for 2 | 90052055 |
| ☑ for 3 | 90052060 |
| ☑ for 4 | 90052067 |
| ☑ for 5 | 90052068 |
| ☑ for 6 | 90052069 |
| ☑ for 7 | 90052070 |
| ☑ for 8 | 90052071 |






PRIVATE RESIDENCE | MARKEY-SCHELSTRAETE OUDENAARDE | BELGIUM



# WIRO

CEILING SUSPENDED



## 1.0 CONE

T30 | max. 60W | E27  
220-240VAC | 50-60Hz  
varnished steel | lacquered

1.00kg | IP20

shade only

|                                                                                     | CODE     |
|-------------------------------------------------------------------------------------|----------|
|  | 245100V0 |
|  | 245100B0 |

## OPTIONAL

T30-225 LED E27 6W

|               | CODE     |
|---------------|----------|
| 2200K   450lm | 9003E129 |
| 2700K   500lm | 9003E136 |

T32-180 carbon filament E27 15W

|              | CODE     |
|--------------|----------|
| 2200K   50lm | 9003E106 |

A60 LED E27 6W

|               | CODE     |
|---------------|----------|
| 2200K   315lm | 9003E109 |

A60 carbon filament E27 15W

|              | CODE     |
|--------------|----------|
| 2200K   50lm | 9003E124 |

more lamps and specs on page 703

## ALWAYS USE

### Suspension single

connector set for one shade | max 4.0kg  
round ceiling base | no steel wire

|                                                                                     | CODE     |
|-------------------------------------------------------------------------------------|----------|
|  | 90015171 |
|  | 90015172 |

more information on page 91

**Plug + Play** | connector set for one  
shade | incl. cable plug with dimmer  
max 4.0kg

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 90015165 |

### Decenter 1.0-8.0

connector set for 1 to max. 8 shades  
round ceiling base | 2.6m  
max 4.0kg per shade

|                                                                                             | CODE     |
|---------------------------------------------------------------------------------------------|----------|
|  for 1 | 90052050 |
|  for 2 | 90052055 |
|  for 3 | 90052060 |
|  for 4 | 90052067 |
|  for 5 | 90052068 |
|  for 6 | 90052069 |
|  for 7 | 90052070 |
|  for 8 | 90052071 |










SHOWROOM WEVER & DUCRÉ | BERND STEINHUBER + MARKEY-SCHELSTRAETE KORTRIJK | BELGIUM



WIRO  
WALL SURFACE




1.0 DIAMOND

T30 | max. 60W | E27  
220-240VAC | 50-60Hz  
varnished steel | lacquered

2.45kg IP20

| CODE                                                                                |           |
|-------------------------------------------------------------------------------------|-----------|
|  | 3351E8PB0 |
|  | 3351E8BB0 |




1.1 DIAMOND

T30 | LED 4-25W | E27  
220-240VAC | 50-60Hz  
varnished steel | lacquered

2.45kg IP20

| CODE                                                                                |           |
|-------------------------------------------------------------------------------------|-----------|
|  | 3352E8PB0 |
|  | 3352E8BB0 |

cable plug with dimmer



OPTIONAL

T30-225 LED E27 6W

| CODE          |          |
|---------------|----------|
| 2200K   450lm | 9003E129 |
| 2700K   500lm | 9003E136 |

T32-180 carbon filament E27 15W

| CODE         |          |
|--------------|----------|
| 2200K   50lm | 9003E106 |

more lamps and specs on page 704

OPTIONAL

T30-225 LED E27 6W

| CODE          |          |
|---------------|----------|
| 2200K   450lm | 9003E129 |
| 2700K   500lm | 9003E136 |

T32-180 carbon filament E27 15W

| CODE         |          |
|--------------|----------|
| 2200K   50lm | 9003E106 |


more lamps and specs on page 704





WIRO

WALL SURFACE



1.0 GLOBE

T30 | max. 60W | E27  
220-240VAC | 50-60Hz  
varnished steel | lacquered

1.95kg IP20

| CODE                                                                                |           |
|-------------------------------------------------------------------------------------|-----------|
|  | 3353E8WB0 |
|  | 3353E8VB0 |
|  | 3353E8BB0 |

OPTIONAL


T30-225 LED E27 6W

| CODE          |          |
|---------------|----------|
| 2200K   450lm | 9003E129 |
| 2700K   500lm | 9003E136 |

T32-180 carbon filament E27 15W

| CODE         |          |
|--------------|----------|
| 2200K   50lm | 9003E106 |

more lamps and specs on page 704




1.1 GLOBE

T30 | LED 4-25W | E27  
220-240VAC | 50-60Hz  
varnished steel | lacquered

1.95kg IP20

| CODE                                                                                |           |
|-------------------------------------------------------------------------------------|-----------|
|  | 3354E8WB0 |
|  | 3354E8VB0 |
|  | 3354E8BB0 |

cable plug with dimmer



OPTIONAL

T30-225 LED E27 6W

| CODE          |          |
|---------------|----------|
| 2200K   450lm | 9003E129 |
| 2700K   500lm | 9003E136 |

T32-180 carbon filament E27 15W

| CODE         |          |
|--------------|----------|
| 2200K   50lm | 9003E106 |


more lamps and specs on page 704



PRIVATE RESIDENCE GERMANY



WIRO  
WALL SURFACE




1.0 CONE

T30 | max. 60W | E27  
220-240VAC | 50-60Hz  
varnished steel | lacquered

1.45kg IP20

| CODE                                                                                |           |
|-------------------------------------------------------------------------------------|-----------|
|  | 3341E8VB0 |
|  | 3341E8BB0 |




1.1 CONE

T30 | LED 4-25W | E27  
220-240VAC | 50-60Hz  
varnished steel | lacquered

1.65kg IP20

| CODE                                                                                |           |
|-------------------------------------------------------------------------------------|-----------|
|  | 3342E8VB0 |
|  | 3342E8BB0 |

cable plug with dimmer



OPTIONAL

T30-225 LED E27 6W

| CODE          |          |
|---------------|----------|
| 2200K   450lm | 9003E129 |
| 2700K   500lm | 9003E136 |

T32-180 carbon filament E27 15W

| CODE         |          |
|--------------|----------|
| 2200K   50lm | 9003E106 |

A60 LED E27 6W

| CODE          |          |
|---------------|----------|
| 2200K   315lm | 9003E109 |

A60 carbon filament E27 15W

| CODE         |          |
|--------------|----------|
| 2200K   50lm | 9003E124 |

more lamps and specs on page 703

OPTIONAL

T30-225 LED E27 6W

| CODE          |          |
|---------------|----------|
| 2200K   450lm | 9003E129 |
| 2700K   500lm | 9003E136 |

T32-180 carbon filament E27 15W

| CODE         |          |
|--------------|----------|
| 2200K   50lm | 9003E106 |

A60 LED E27 6W

| CODE          |          |
|---------------|----------|
| 2200K   315lm | 9003E109 |

A60 carbon filament E27 15W

| CODE         |          |
|--------------|----------|
| 2200K   50lm | 9003E124 |

more lamps and specs on page 703





PRIVATE RESIDENCE | MARKEY-SCHELSTRAETE BELGIUM



black + white  
WB



black +  
copper  
PB




black + rust  
VB



black +  
black  
BB

# WIRO

## TABLE




### 1.0 DIAMOND

T30 | LED 4-25W | E27  
220-240VAC | 50-60Hz  
varnished steel | lacquered

2.90kg IP20

|  | CODE      |
|--|-----------|
|  | 6603E8PB0 |
|  | 6603E8BB0 |

cable plug with dimmer



### OPTIONAL


T30-225 LED E27 6W

|               | CODE     |
|---------------|----------|
| 2200K   450lm | 9003E129 |
| 2700K   500lm | 9003E136 |

T32-180 carbon filament E27 15W

|              | CODE     |
|--------------|----------|
| 2200K   50lm | 9003E106 |

more lamps and specs on page 704




### 1.0 GLOBE

T30 | LED 4-25W | E27  
220-240VAC | 50-60Hz  
varnished steel | lacquered

2.20kg IP20

|  | CODE      |
|--|-----------|
|  | 6601E8WB0 |
|  | 6601E8VB0 |
|  | 6601E8BB0 |

cable plug with dimmer



### OPTIONAL


T30-225 LED E27 6W

|               | CODE     |
|---------------|----------|
| 2200K   450lm | 9003E129 |
| 2700K   500lm | 9003E136 |

T32-180 carbon filament E27 15W

|              | CODE     |
|--------------|----------|
| 2200K   50lm | 9003E106 |

more lamps and specs on page 704




### 2.0 GLOBE

T30 | LED 4-25W | E27  
220-240VAC | 50-60Hz  
varnished steel | lacquered

3.20kg IP20

|  | CODE      |
|--|-----------|
|  | 6602E8WB0 |
|  | 6602E8VB0 |
|  | 6602E8BB0 |

cable plug with dimmer



### OPTIONAL

T30-300 LED E27 8W

|               | CODE     |
|---------------|----------|
| 2200K   550lm | 9003E130 |
| 2700K   550lm | 9003E135 |

T32-300 carbon filament E27 15W

|              | CODE     |
|--------------|----------|
| 2200K   50lm | 9003E127 |

more lamps and specs on page 704



black + white  
WB



black +  
copper  
PB




black + rust  
VB



black +  
black  
BB

# WIRO

FLOOR SURFACE




## DIAMOND 1.0

T30 | LED 4-25W | E27  
220-240VAC | 50-60Hz  
varnished steel | lacquered

5,40kg IP20

|  | CODE      |
|--|-----------|
|  | 6614E8PB0 |
|  | 6614E8BB0 |

cable plug with dimmer



## OPTIONAL


T30-225 LED E27 6W

|               | CODE     |
|---------------|----------|
| 2200K   450lm | 9003E129 |
| 2700K   500lm | 9003E136 |

T32-180 carbon filament E27 15W

|              | CODE     |
|--------------|----------|
| 2200K   50lm | 9003E106 |

more lamps and specs on page 704




## GLOBE 1.0

T30 | LED 4-25W | E27  
220-240VAC | 50-60Hz  
varnished steel | lacquered

6,10kg IP20

|  | CODE      |
|--|-----------|
|  | 6611E8WB0 |
|  | 6611E8VB0 |
|  | 6611E8BB0 |

cable plug with dimmer



## OPTIONAL


T30-300 LED E27 8W

|               | CODE     |
|---------------|----------|
| 2200K   550lm | 9003E130 |
| 2700K   550lm | 9003E135 |

T32-300 carbon filament E27 15W

|              | CODE     |
|--------------|----------|
| 2200K   50lm | 9003E127 |

more lamps and specs on page 704




## GLOBE 2.0

T30 | LED 4-25W | E27  
220-240VAC | 50-60Hz  
varnished steel | lacquered

6,70kg IP20

|  | CODE      |
|--|-----------|
|  | 6612E8WB0 |
|  | 6612E8VB0 |
|  | 6612E8BB0 |

cable plug with dimmer



## OPTIONAL

T30-300 LED E27 8W

|               | CODE     |
|---------------|----------|
| 2200K   550lm | 9003E130 |
| 2700K   550lm | 9003E135 |

T32-300 carbon filament E27 15W

|              | CODE     |
|--------------|----------|
| 2200K   50lm | 9003E127 |

more lamps and specs on page 704



ONE IDEA

# ENDLESS VARIATIONS

I bet you think they're sweet. They are. REVER's delicate pastel shades are real eye candy, and not just for Sixties fans. The multifunctional luminaire was designed by the Italian designer Marcello Ziliani, who was inspired by the lapels typical of the time. The result is a unique product in both design and material. What looks like frosted glass is a special polycarbonate moulded in a single casting. This makes REVER a highlight in terms of stability. Regardless of whether they are wall, ceiling, floor, or table luminaires. By the way, if you want it colourful, combine up to five distinct luminaire fixtures with six different aluminium details and trays. It couldn't be more customisable.

## SHADE COLOUR | LAMP BODY



## TRAY COLOUR | MOUNTING DETAIL



Ooch - sind die süß, werden Sie jetzt denken. Stimmt. Denn die zarten Pastelltöne von REVER sind nicht nur für Sixties-Fans echter „Eyecandy“. Entworfen wurde die multifunktionale Leuchte vom italienischen Designer Marcello Ziliani, der sich von den typischen Reversformen der Zeit inspirieren ließ. Das Ergebnis ist ein Produkt, das nicht nur durch sein Design, sondern auch durch das verwendete Material absolut einzigartig ist. Was wie Milchglas aussieht, ist nämlich ein spezielles Polycarbonat, das in nur einem Guss geformt wird. Das macht REVER auch in puncto Stabilität zu einem echten Highlight. Ganz egal, ob man sie als Wand-, Decken-, Steh- oder Tischleuchte einsetzt. Übrigens: Wer's gerne bunt mag, kann bis zu fünf unterschiedliche Leuchtenkörper mit sechs verschiedenen Aluminiumdetails und Trays kombinieren. Individueller geht's nicht.



**MIX AND MATCH**

[weverducre.com/rever](https://weverducre.com/rever)



DESIGNER

# Designing luminaires is a very niche art.

MARCELLO ZILIANI



MORE INFO

[weverducre.com/rever](https://weverducre.com/rever)

Wever & Ducré teamed up with renowned designer Marcello Ziliani, who created an eclectic collection of luminaires that skilfully combines timeless design with functionality. The lapels of men's jackets served as a model for the diffusers' shape. The lamp body is composed of a single piece of injection-moulded polycarbonate. Inspired by delicate linens, the surface texture is achieved by a complex, cutting-edge laser technology. Sounds good? Then you'll also be happy to hear that the REVER collection is available in a variety of colours and finishes, making it a perfect fit for every lobby. And also for every hotel room of course.


In Zusammenarbeit mit dem renommierten italienischen Designer Marcello Ziliani realisierte Wever & Ducré eine eklektische Leuchtenserie, die gekonnt zeitloses Design mit Funktionalität verbindet. Modernste Lasertechnologien verleihen der Oberfläche ihre zarte, von Leinen inspirierte Struktur. Der elegante Leuchtenkörper erinnert an ein Herrenanzugrevers. Klingt gut? Dann freut es Sie sicher auch zu hören, dass die REVER-Kollektion in ihrer Vielzahl an Farb- und Oberflächen-Kombinationen perfekt in jede Lobby passt. Und natürlich auch in jedes Hotelzimmer.








PRIVATE RESIDENCE GERMANY



mounting detail chrome

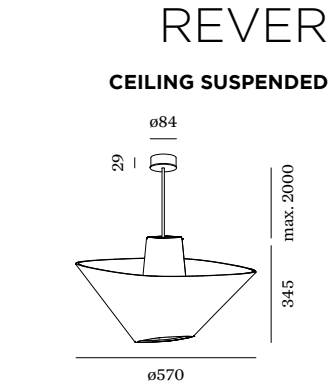

1.0

LED A60 max. 15W | E27  
metalized or painted ABS  
polycarbonate | hanging in  
both ways

IP20 3.5kg

lamp body

|  | CODE    |
|--|---------|
|  | 6521ETG |
|  | 6521ESG |
|  | 6521ECW |
|  | 6521EAY |
|  | 6521EHR |

mounting detail

|  | CODE |
|--|------|
|  | C    |
|  | N    |
|  | G    |
|  | P    |
|  | W    |
|  | B    |

cable colour

|  | CODE |
|--|------|
|  | W    |
|  | B    |

6.0m cable available on request

**OPTIONAL**

A60 LED E27 15W | phase-cut dim

|                | CODE     |
|----------------|----------|
| 2700K   1400lm | 9003E153 |





PRIVATE RESIDENCE GERMANY



# REVER

WALL SURFACE



1.0

LED C35 or P25 max. 6W | E14  
220-240VAC | 50-60Hz  
plated or powder coated steel  
polycarbonate

IP20 1kg

lamp body

|  | CODE     |
|--|----------|
|  | 6511CTG_ |
|  | 6511CSG_ |
|  | 6511CCW_ |
|  | 6511CAY_ |
|  | 6511CHR_ |

tray colours

|  | CODE |
|--|------|
|  | C_   |
|  | N_   |
|  | G_   |
|  | P_   |
|  | W_   |
|  | B_   |

## OPTIONAL

C35 LED E14 6W opal | phase-cut dim  
CODE  
2700K | 450lm 9003C103

1.1

LED C35 or P25 max. 6W | E14  
220-240VAC | 50-60Hz  
plated or powder coated steel  
polycarbonate

IP20 1,1kg

lamp body


|  | CODE     |
|--|----------|
|  | 6511CTG_ |
|  | 6511CSG_ |
|  | 6511CCW_ |
|  | 6511CAY_ |
|  | 6511CHR_ |

tray colours

|  | CODE |
|--|------|
|  | C_   |
|  | N_   |
|  | G_   |
|  | P_   |
|  | W_   |
|  | B_   |

Cable Plug Colours  
cable plug with dimmer

|  | CODE |
|--|------|
|  | _W   |
|  | _B   |









# REVER

WALL SURFACE



## 2.0

LED C35 or P25 max. 6W | E14  
220-240VAC | 50-60Hz  
plated or powder coated steel  
polycarbonate

IP20 0.7kg

lamp body

|  | CODE     |
|--|----------|
|  | 6512CTG_ |
|  | 6512CSG_ |
|  | 6512CCW_ |
|  | 6512CAY_ |
|  | 6512CHR_ |

mounting detail

|  | CODE |
|--|------|
|  | C_   |
|  | N_   |
|  | G_   |
|  | P_   |
|  | W_   |
|  | B_   |

## OPTIONAL

C35 LED E14 6W opal | phase-cut dim  
CODE  
2700K | 450lm 9003C103

## 2.1

LED C35 or P25 max. 6W | E14  
220-240VAC | 50-60Hz  
plated or powder coated steel  
polycarbonate

IP20 0.8kg

lamp body


|  | CODE     |
|--|----------|
|  | 6512CTG_ |
|  | 6512CSG_ |
|  | 6512CCW_ |
|  | 6512CAY_ |
|  | 6512CHR_ |

mounting detail

|  | CODE |
|--|------|
|  | C_   |
|  | N_   |
|  | G_   |
|  | P_   |
|  | W_   |
|  | B_   |


Cable Plug Colours  
cable plug with dimmer

|  | CODE |
|--|------|
|  | _W   |
|  | _B   |





PRIVATE RESIDENCE GERMANY



1.0

LED A60 max. 12W | E27  
220-240VAC | 50-60Hz  
plated or powder coated steel  
polycarbonate

IP20 1.5kg



lamp body

|  | CODE     |
|--|----------|
|  | 6501ETG_ |
|  | 6501ESG_ |
|  | 6501ECW_ |
|  | 6501EAY_ |
|  | 6501EHR_ |

tray colours

|  | CODE |
|--|------|
|  | C    |
|  | N    |
|  | G    |
|  | P    |
|  | W    |
|  | B    |

black cable plug with dimmer  
for white tray white cable



2.0

LED A60 max. 12W | E27  
220-240VAC | 50-60Hz  
plated or powder coated steel  
polycarbonate

IP20 1.1kg 12


lamp body

|  | CODE     |
|--|----------|
|  | 6502ETG_ |
|  | 6502ESG_ |
|  | 6502ECW_ |
|  | 6502EAY_ |
|  | 6502EHR_ |

mounting detail

|  | CODE |
|--|------|
|  | C    |

black cable plug with dimmer



OPTIONAL

A60 LED E27 9W | phase-cut dim  
CODE  
2700K | 800lm 9003E152

REVER

TABLE



As awarded by The Chicago Athenaeum:  
Museum of Architecture and Design










# REVER DINING

## TABLE



As awarded by The Chicago Athenaeum:  
Museum of Architecture and Design



### 1.0

LED 2.5W | touch dim  
magnetic pole with optional base  
rechargeable li-ion battery  
incl. 1.5m USB charging cable  
lights up to 8 hours | powder  
coated zink alloy | PMMA

IP23 0.8kg

lamp body

|                                                                                     | CODE     |
|-------------------------------------------------------------------------------------|----------|
|  | 655184Q_ |
|  | 655184B_ |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2200K        | 90   >80    | 1    |

lamp body

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 655184C_ |
|  | 655184G_ |
|  | 655184Q_ |
|  | 655184W_ |
|  | 655184B_ |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 100   >80   | 2    |

### OPTIONAL

multiple charging tray | up to 4 fixtures

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 90018007 |

### ALWAYS USE

flat metal plate to add to REVER  
DINING with magnetic fixation  
suitable to put under the table cloth

plate colours

|                                                                                     | CODE     |
|-------------------------------------------------------------------------------------|----------|
|  | 90019163 |
|  | 90019164 |



### ALWAYS USE

single metal charging tray to  
add to REVER DINING with  
magnetic fixation

tray colours

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 90019171 |
|  | 90019173 |
|  | 90019175 |
|  | 90019165 |
|  | 90019166 |





PARKHOTEL KORTRIJK | BELGIUM



RESTAURANT FREIGEIST BRAUQUARTIER | FIPE ARCHITECTURE GRAZ | AUSTRIA




PRIVATE RESIDENCE GRAZ | AUSTRIA

available from spring 2020

# REVER DINING

TABLE



2.0


LED 2W | 220-240VAC | 50-60Hz  
PCB 3-step | zink alloy powder  
coated | PMMA | touch dim

0.93kg IP23 P


| CODE                                                                                  |         |
|---------------------------------------------------------------------------------------|---------|
|  | 655284W |
|  | 655284Q |
|  | 655284B |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 100   >80   | 2    |

black cable plug with transformer  
white cable for white tray







1.0 XS

LED A60 max. 12W | E27  
220-240VAC | 50-60Hz | plated  
powder coated steel polycarbonate

IP20 4.7kg


lamp body

|  | CODE     |
|--|----------|
|  | 6531ETG_ |
|  | 6531ESG_ |
|  | 6531ECW_ |
|  | 6531EAY_ |
|  | 6531EHR_ |

mounting detail

|  | CODE |
|--|------|
|  | C    |
|  | N    |
|  | G    |
|  | P    |
|  | W    |
|  | B    |


black cable plug with dimmer  
for white tray white cable



OPTIONAL

A60 LED E27 9W | phase-cut dim

|               | CODE     |
|---------------|----------|
| 2700K   800lm | 9003E152 |



1.0 S

LED A60 max. 12W | E27  
220-240VAC | 50-60Hz | plated  
powder coated steel polycarbonate

IP20 5kg


lamp body

|  | CODE     |
|--|----------|
|  | 6532ETG_ |
|  | 6532ESG_ |
|  | 6532ECW_ |
|  | 6532EAY_ |
|  | 6532EHR_ |

mounting detail

|  | CODE |
|--|------|
|  | C    |
|  | N    |
|  | G    |
|  | P    |
|  | W    |
|  | B    |


black cable plug with dimmer  
for white tray white cable



OPTIONAL

A60 LED E27 9W | phase-cut dim

|               | CODE     |
|---------------|----------|
| 2700K   800lm | 9003E152 |



1.0 M

LED A60 max. 12W | E27  
220-240VAC | 50-60Hz | plated  
powder coated steel polycarbonate

IP20 5.3kg


lamp body

|  | CODE     |
|--|----------|
|  | 6533ETG_ |
|  | 6533ESG_ |
|  | 6533ECW_ |
|  | 6533EAY_ |
|  | 6533EHR_ |

mounting detail

|  | CODE |
|--|------|
|  | C    |
|  | N    |
|  | G    |
|  | P    |
|  | W    |
|  | B    |


black cable plug with dimmer  
for white tray white cable



OPTIONAL

A60 LED E27 9W | phase-cut dim

|               | CODE     |
|---------------|----------|
| 2700K   800lm | 9003E152 |



1.0 L

LED A60 max. 12W | E27  
220-240VAC | 50-60Hz | plated  
powder coated steel polycarbonate

IP20 5.4kg


lamp body

|  | CODE     |
|--|----------|
|  | 6534ETG_ |
|  | 6534ESG_ |
|  | 6534ECW_ |
|  | 6534EAY_ |
|  | 6534EHR_ |

mounting detail

|  | CODE |
|--|------|
|  | C    |
|  | N    |
|  | G    |
|  | P    |
|  | W    |
|  | B    |

black cable plug with dimmer  
for white tray white cable



OPTIONAL

A60 LED E27 9W | phase-cut dim

|               | CODE     |
|---------------|----------|
| 2700K   800lm | 9003E152 |


REVER  
FLOOR SURFACE



DESIGNER

# You can learn new things from old ones.

JULES WABBES

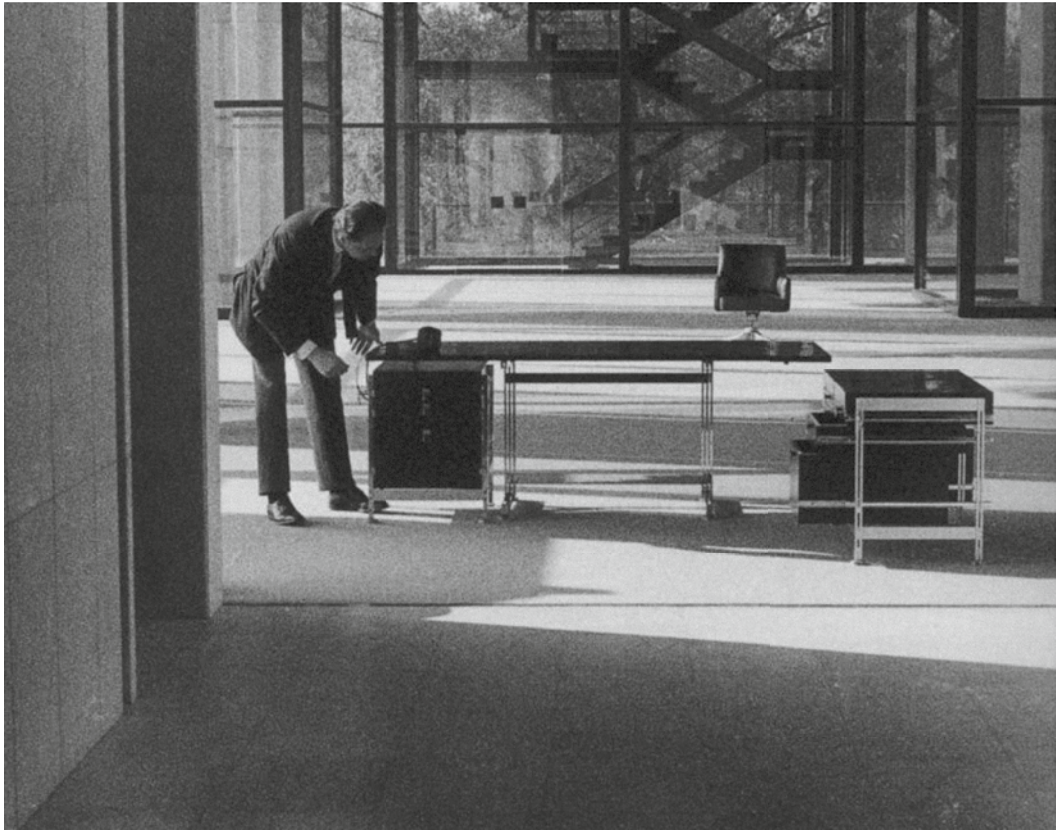

Jules Wabbes (1919–1974), who had a penchant for finding new ideas at flea markets, must have had the same thought. It's no wonder people said that the Belgian architect and furniture designer had a unique eye for shapes and materials. And that is apparent in his countless designs, which still haven't gone out of fashion even today. A primary example: The chandelier, developed in the 1970s, whose futuristic, floral form is as much at home in a modern bar as in a posh hotel lobby.


So oder so ähnlich könnte Jules Wabbes (1919–1974) gedacht haben, der sich gerne auf Flohmärkten inspirieren ließ. Kein Wunder, dass man dem belgischen Architekten und Möbeldesigner einen ganz besonderen Blick für Formen und Materialien nachsagte. Dieser manifestiert sich in seinen zahlreichen Entwürfen, die bis heute nicht aus der Mode gekommen sind. Bestes Beispiel: Ein in den 1970er Jahren entworfener Kronleuchter, dessen futuristische, florale Form sich damals wie heute gleichermaßen perfekt in moderne Bars und edle Hotel-Lobbys einfügt.

Jules Wabbes with one of his desks at the Royale Belge, Brussels, 1971, © Wabbes Sofam, Brussels, 2017.





J.J.W.  
CEILING SURFACE



03

3x A60 max. 53W | E27  
220-240VAC | 50-60Hz  
aluminium lacquered

4.00kg IP20 0.3

| CODE                                                                                  |          |
|---------------------------------------------------------------------------------------|----------|
|  | 2051E8S0 |
|  | 2051E8G0 |

OPTIONAL


A60 LED E27 6W dim

| CODE          |          |
|---------------|----------|
| 2200K   315lm | 9003E109 |
| 2700K   500lm | 9003E138 |

more lamps and specs on page 703



J.J.W.  
CEILING SUSPENDED



**04**

6x A60 max. 53W | E27  
220-240VAC | 50-60Hz  
aluminium lacquered

4.50kg IP20  $\pm 0.3^\circ$


|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 2052E8S0 |
|  | 2052E8G0 |

**OPTIONAL**

A60 LED E27 6W dim

|               | CODE     |
|---------------|----------|
| 2200K   315lm | 9003E109 |
| 2700K   500lm | 9003E138 |

more lamps and specs on page 703



**042**

6x A60 max. 53W | E27  
220-240VAC | 50-60Hz  
aluminium lacquered

8.10kg IP20  $\pm 0.3^\circ$

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 2056E8S0 |
|  | 2056E8G0 |

**OPTIONAL**

A60 LED E27 6W dim

|               | CODE     |
|---------------|----------|
| 2200K   315lm | 9003E109 |
| 2700K   500lm | 9003E138 |

more lamps and specs on page 703






BRASSERIE CHOPIN | INTERA DESIGN BILZEN | BELGIUM



J.J.W.  
CEILING SUSPENDED



05

3x A60 max. 53W | E27  
220-240VAC | 50-60Hz  
aluminium lacquered

8.50kg | IP20 | 0,3°



| CODE                                                                                  |          |
|---------------------------------------------------------------------------------------|----------|
|  | 2053E8S0 |
|  | 2053E8G0 |

OPTIONAL

| CODE               |          |
|--------------------|----------|
| A60 LED E27 6W dim |          |
| 2200K   315lm      | 9003E109 |
| 2700K   500lm      | 9003E138 |

more lamps and specs on page 703



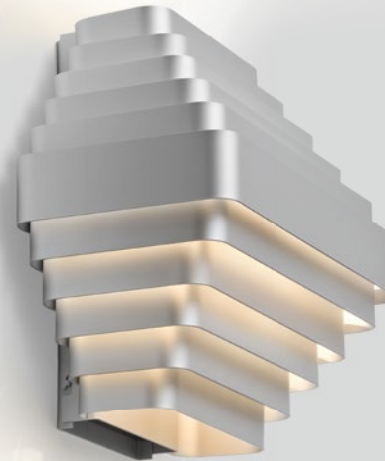

## 01

2x A60 max. 53W | E27  
220-240VAC | 50-60Hz  
aluminium lacquered

2.92kg | IP20 | 0.3

| CODE                                                                                  |          |
|---------------------------------------------------------------------------------------|----------|
|  | 2054E8S0 |
|  | 2054E8G0 |

## OPTIONAL

A60 LED E27 6W dim


| CODE          |          |
|---------------|----------|
| 2200K   315lm | 9003E109 |
| 2700K   500lm | 9003E138 |

more lamps and specs on page 703









02

A60 max. 53W | E27  
220-240VAC | 50-60Hz  
aluminium lacquered

1.02kg IP20 0.3°

| CODE     |  |
|----------|--|
| 2055E8S0 |  |
| 2055E8G0 |  |

OPTIONAL

A60 LED E27 6W dim

| CODE          |          |
|---------------|----------|
| 2200K   315lm | 9003E109 |
| 2700K   500lm | 9003E138 |

more lamps and specs on page 703





CEILING  
RECESSED  
SPOTLIGHTS



**DEEP BIJOU**  
p. 169



**DEEP PETIT**  
p. 171



**DEEP**  
p. 173



**DEEPER**  
p. 175



**DEEP ADJUST  
PETIT**  
p. 177



**DEEP ADJUST**  
p. 179



**DEEP ADJUST  
TRIMLESS**  
p. 185



**DEEP ADJUST  
FORT**  
p. 187




**DEEP ASYM  
ADJUST**  
p. 189



**SPINEO**  
p. 191



**RONY**  
p. 193



**PIRRO**  
p. 195




**NOP PETIT**  
p. 199



**NOP**  
p. 201




**RON**  
p. 203



**PLANO PETIT**  
p. 207



**PLANO**  
p. 209




**PLANO ADJUST  
FORT**  
p. 211




**STRANGE PETIT**  
p. 213



**STRANGE**  
p. 215



**SNEAK TRIM**  
p. 217



**SNEAK TRIMLESS**  
p. 219



**PYRAMID**  
p. 221

CEILING  
SEMI-  
RECESSED



**RUVI**  
p. 223



**CENO 1.0**  
p. 225



**CENO 2.0**  
p. 225



**BLIEK ROUND  
PETIT**  
p. 227



**BLIEK ROUND**  
p. 229



**SPYDER**  
p. 231



**BLIEK SQUARE**  
p. 235

CEILING  
RECESSED  
IP 44



**DEEP IP44**  
p. 245



**DEEPER IP44**  
p. 247



**RINI IP44**  
p. 251



**LUNA ROUND IP44**  
p. 253



**RINI SNEAK IP44**  
p. 255




**LUNA SQUARE IP44**  
p. 257



**PLANO IP44**  
p. 259



**MIRBI IP44 1.0**  
p. 261



**MIRBI IP44 2.0**  
p. 261



**CITY IP44**  
p. 263

CEILING  
RECESSED

p. 167 – 263



# HOW DEEP IS YOUR DEEP?

## DEEP

FIX



**BIJOU 1.0**  
LED



**BIJOU 2.0**  
LED



**PETIT 1.0**  
LED



**1.0**  
LED | MR16 | PAR16  
ZigBee



**IP44 1.0**  
LED | MR16 | PAR16  
ZigBee

## DEEPER

FIX



**1.0**  
LED | MR16 | PAR16  
ZigBee




**IP44 1.0**  
LED | MR16 | PAR16  
ZigBee

DEEP and DEEPER are classic downlights. They shine their light beam straight down. Perfect for corridors and ceilings. But the recessed lights have so much more to offer. DEEP is available in five different versions and varying sizes. The IP44 variant is even waterproof. This means you can install a starry sky in the bathroom if you want. By the way, DEEPER is also available as an IP44 version and almost disappears in the ceiling. The 1.0 version of DEEP is even ZigBee capable, which is handy.


DEEP und DEEPER sind klassische Downlights und geben ihren Lichtstrahl gerade nach unten ab. Perfekt für Flure und Decken. Doch die Einbauleuchten haben noch viel mehr drauf. So ist DEEP in fünf verschiedenen Versionen und unterschiedlichen Größen zu haben. Und als IP44-Variante sogar wassergeschützt. Da kann man sich den Sternenhimmel auch ins Badezimmer montieren. Übrigens: Auch DEEPER gibt's als IP44-Variante, die fast unsichtbar in der Decke verschwindet. Praktisch: Die 1.0-Version der DEEP ist sogar ZigBee-fähig.

## DEEP ADJUST


ADJUSTABLE




**PETIT 1.0**  
LED



**1.0**  
LED | MR16 | PAR16  
ZigBee



**2.0**  
LED | PAR16  
ZigBee




**FORT 1.0**  
LED



**TRIMLESS 1.0**  
LED | MR16 | PAR16

## DEEP ASYM

ADJUSTABLE



**1.0**  
LED | MR16 | PAR16

You want to put Picasso in the right light, create a fantastic ceiling pattern, or skilfully highlight surface structures on the wall? The DEEP family's swivelling spots are perfect for you. DEEP ADJUST is available in different versions and sizes. Some versions are even smart home-compatible. If you are looking for a luminaire that creates powerful wallwash effects, you should choose DEEP ASYM, which can be controlled via your mobile device.

Sie möchten den Picasso ins rechte Licht rücken, ein tolles Deckenbild kreieren oder Oberflächenstrukturen an der Wand gekonnt hervorheben? Dann sind die schwenkbaren Spots der DEEP-Familie die perfekte Lösung für Sie. Denn auch DEEP ADJUST ist in unterschiedlichen Versionen und Größen erhältlich. Und in einigen Ausführungen sogar Smart-Home-kompatibel. Sie suchen nach einer Leuchte, die wirkungsvolle Wallwash-Effekte erzeugt? Dann sollten Sie zu DEEP ASYM greifen, die ebenfalls via Handy oder Smartphone steuerbar ist.



**HAVE A LOOK**  
weverducre.com/deep



# DEEP BIJOU

CEILING RECESSED



## 1.0 LED

LED 4.5W | 250mA | 18V  
COB 3-step | excl. power supply  
aluminium powder coated

0.065kg IP20 0.3° 30°

50-52 85 4-25


|  | CODE    |
|--|---------|
|  | 165161W |
|  | 165161G |
|  | 165161B |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 335   >90   | 3    |
| 3000K        | 350   >90   | 5    |

## ALWAYS USE

power supply | 250mA

|                                 | CODE     |
|---------------------------------|----------|
| 10W dim                         | 90226401 |
| more power supplies on page 695 |          |



## 2.0 LED

2x LED 4.5W | 250mA | 36V total  
COB 3-step | excl. power supply  
aluminium powder coated

0.15kg IP20 0.3° 30°

50-52x100-104 60 4-25


|  | CODE    |
|--|---------|
|  | 165261W |
|  | 165261G |
|  | 165261B |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 2x335   >90 | 3    |
| 3000K        | 2x350   >90 | 5    |

## ALWAYS USE

power supply | 250mA (1 piece needed)

|                                 | CODE     |
|---------------------------------|----------|
| 15W dim                         | 90226501 |
| more power supplies on page 695 |          |




available from spring 2020

only for 2.0 LED version





DENTAL OFFICE CURIOSA | CANDICE BRUNY LYON | FRANCE



fits into Kaiser ThermoX® 9320-11

# DEEP petit

CEILING RECESSED



## 1.0 LED

LED 6W | 350mA | 18V  
COB 3-step | excl. power supply  
aluminium powder coated

0.04kg IP20 0.3° 34°

68-70 50 4-23

| CODE    |  |
|---------|--|
| 153261W |  |
| 153261S |  |
| 153261G |  |
| 153261B |  |

| LIGHT COLOUR     | LUMEN   CRI | CODE |
|------------------|-------------|------|
| 2700K            | 450   >90   | 3    |
| 3000K            | 570   >90   | 5    |
| 1800-2700K   15V | 360   >95   | 9    |

## ALWAYS USE

power supply | 350mA

| CODE     |          |
|----------|----------|
| 10W      | 90223401 |
| 10W dim  | 90223402 |
| 20W DALI | 90243601 |

more power supplies on page 695



For wireless dimming compatible  
with Amazon Echo Plus, Philips Hue  
and Homee see page 239.



1.0 LED

LED 7/10W | 350/500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated  
CRI >90

0.31kg IP20 3-step 36°

90

wire springs 76-79 4-27

|  | CODE     |
|--|----------|
|  | 112161W_ |
|  | 112161S_ |
|  | 112161G_ |
|  | 112161B_ |

blade springs 76-79 min 10

|  | CODE      |
|--|-----------|
|  | 112161W_C |
|  | 112161B_C |

| LIGHT COLOUR     | LUMEN   | CRI | CODE |
|------------------|---------|-----|------|
| 2700K            | 530/710 | >90 | 3    |
| 3000K            | 570/770 | >90 | 5    |
| 4000K            | 610/830 | >90 | 6    |
| 1800-2850K   16V | 330/450 | >95 | 9    |

ALWAYS USE

power supply | 500mA

|          | CODE     |
|----------|----------|
| 10W      | 90214405 |
| 15W dim  | 90224501 |
| 20W DALI | 90244602 |

350mA power supplies on page 694



1.0 MR16

QR-CBC51 max. 12W | GU5.3  
12V | excl. power supply  
aluminium powder coated

0.25kg IP20 3-step

90

wire springs 76-79 4-27

|  | CODE     |
|--|----------|
|  | 112110W0 |
|  | 112110S0 |
|  | 112110G0 |
|  | 112110B0 |

blade springs 76-79 min 10

|  | CODE      |
|--|-----------|
|  | 112110W0C |
|  | 112110B0C |


ALWAYS USE

power supply | 12V

|         | CODE     |
|---------|----------|
| 10W dim | 90221401 |
| 25W dim | 90221701 |
| 70W dim | 90221904 |

more specs on page 699

DEEP  
CEILING RECESSED



1.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated

0.29kg IP20 3-step

105

wire springs 76-79 4-27

|  | CODE     |
|--|----------|
|  | 112120W0 |
|  | 112120S0 |
|  | 112120G0 |
|  | 112120B0 |

blade springs 76-79 min 10

|  | CODE      |
|--|-----------|
|  | 112120W0C |
|  | 112120B0C |

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim


|            | CODE     |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701





For wireless dimming compatible with Amazon Echo Plus, Philips Hue and Homee see page 239.



1.0 LED

LED 7/10W | 350/500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated

0.17kg IP20  $\varnothing \pm 0,3^\circ$   $\Delta 36^\circ$

95 76-79 4-38

|  | CODE     |
|--|----------|
|  | 152161W_ |
|  | 152161S_ |
|  | 152161G_ |
|  | 152161Q_ |
|  | 152161B_ |


| LIGHT COLOUR | LUMEN       | CRI | CODE |
|--------------|-------------|-----|------|
| 2700K        | 510/680     | >90 | 3    |
| 3000K        | 550/740     | >90 | 5    |
| 1800-2850K   | 16V 280/370 | >95 | 9    |

ALWAYS USE

power supply | 500mA

|          | CODE     |
|----------|----------|
| 10W      | 90214405 |
| 15W dim  | 90224501 |
| 20W DALI | 90244602 |

350mA power supplies on page 694



1.0 MR16

QR-CBC51 max. 12W | GU5.3  
12V | excl. power supply  
aluminium powder coated

0.11kg IP20  $\varnothing \pm 0,3^\circ$

100 76-79 4-38


|  | CODE     |
|--|----------|
|  | 152110W0 |
|  | 152110S0 |
|  | 152110G0 |
|  | 152110Q0 |
|  | 152110B0 |

ALWAYS USE

power supply | 12V

|         | CODE     |
|---------|----------|
| 10W dim | 90221401 |
| 25W dim | 90221701 |
| 70W dim | 90221904 |

more specs on page 699



1.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated

0.15kg IP20  $\varnothing \pm 0,3^\circ$

115 76-79 4-38

|  | CODE     |
|--|----------|
|  | 152120W0 |
|  | 152120S0 |
|  | 152120G0 |
|  | 152120Q0 |
|  | 152120B0 |

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

|            | CODE     |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |


more lamps and specs on page 701

DEEPER

CEILING RECESSED




PRIVATE RESIDENCE | EVA CARLIER INTERIOR DESIGN BELGIUM



fits into Kaiser ThermoX® 9320-11

# DEEP ADJUST petit

CEILING RECESSED



## 1.0 LED

LED 6W | 350mA | 18V  
COB 3-step | excl. power supply  
aluminium powder coated

0.05kg IP20 0.3-1.0 P A 34°

68 35°/35° 355° TL 60

wire springs 68-70 4-23

| CODE     |  |
|----------|--|
| 153361W_ |  |
| 153361G_ |  |
| 153361Q_ |  |
| 153361B_ |  |

blade springs 69-71 min 8

| CODE      |  |
|-----------|--|
| 153361W_C |  |
| 153361B_C |  |

| LIGHT COLOUR     | LUMEN   CRI | CODE |
|------------------|-------------|------|
| 2700K            | 540   >90   | 3    |
| 3000K            | 570   >90   | 5    |
| 1800-2700K   15V | 360   >95   | 9    |

## ALWAYS USE

power supply | 350mA

| CODE     |          |
|----------|----------|
| 10W      | 90223401 |
| 10W dim  | 90223402 |
| 20W DALI | 90243601 |

more power supplies on page 695






RESTAURANT BABAR | H & B ARCHITECTS MOESKROEN | BELGIUM



For wireless dimming compatible  
with Amazon Echo Plus, Philips Hue  
and Homee see page 239.



1.0 LED

LED 7/10W | 350/500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated

0.23kg IP20 35°/35° 355° 90°

35°/35° 355° 90°

wire springs 86-89 4-23

| CODE |          |
|------|----------|
|      | 112361W_ |
|      | 112361S_ |
|      | 112361G_ |
|      | 112361Q_ |
|      | 112361B_ |

blade springs 86-89 min 6

| CODE |           |
|------|-----------|
|      | 112361W_C |
|      | 112361B_C |


| LIGHT COLOUR     | LUMEN   CRI   | CODE |
|------------------|---------------|------|
| 2700K            | 530/710   >90 | 3    |
| 3000K            | 570/770   >90 | 5    |
| 4000K            | 580/800   >90 | 6    |
| 1800-2850K   16V | 330/450   >95 | 9    |

ALWAYS USE

power supply | 500mA

| CODE     |          |
|----------|----------|
| 10W      | 90214405 |
| 15W dim  | 90224501 |
| 20W DALI | 90244602 |

350mA power supplies on page 694



1.0 MR16

QR-CBC51 max. 12W | GU5.3  
12V | excl. power supply  
aluminium powder coated

0.17kg IP20 35°/35° 355° 90°

35°/35° 355° 90°

wire springs 86-89 4-23

| CODE |          |
|------|----------|
|      | 112310W0 |
|      | 112310S0 |
|      | 112310G0 |
|      | 112310Q0 |
|      | 112310B0 |

blade springs 86-89 min 6

| CODE |           |
|------|-----------|
|      | 112310W0C |
|      | 112310B0C |


ALWAYS USE

power supply | 12V

| CODE    |          |
|---------|----------|
| 10W dim | 90221401 |
| 25W dim | 90221701 |
| 70W dim | 90221904 |

more specs on page 699

CEILING RECESSED



1.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated

0.21kg IP20 35°/35° 355° 105°

35°/35° 355° 105°

wire springs 86-89 4-23

| CODE |          |
|------|----------|
|      | 112320W0 |
|      | 112320S0 |
|      | 112320G0 |
|      | 112320Q0 |
|      | 112320B0 |

blade springs 86-89 min 6

| CODE |           |
|------|-----------|
|      | 112320W0C |
|      | 112320B0C |

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

| CODE       |          |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701











PRIVATE RESIDENCE | ROACH YOUNG STUDIO UNITED KINGDOM



2.0 LED

2x LED 7/10W | 350/500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated  
1800-2850K 16V

0.61kg IP20 0.3m 36°

35°/35° 355° 90 86-89x172-178  
4-23

| CODE    |  |
|---------|--|
| 112761W |  |
| 112761B |  |

| LIGHT COLOUR | LUMEN     | CRI | CODE |
|--------------|-----------|-----|------|
| 2700K        | 2x530/710 | >90 | 3    |
| 3000K        | 2x570/770 | >90 | 5    |
| 4000K        | 2x580/800 | >90 | 6    |
| 1800-2850K   | 2x330/450 | >95 | 9    |

2.0 PAR16

2x PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated

0.42kg IP20 0.3m 35°/35°

355° 105 4-30 86-89x172-178  
4-23

| CODE     |  |
|----------|--|
| 112720W0 |  |
| 112720B0 |  |



For wireless dimming compatible  
with Amazon Echo Plus, Philips Hue  
and Homee see page 239.

ALWAYS USE

power supply | 500mA

| CODE     |          |
|----------|----------|
| 10W      | 90214405 |
| 15W dim  | 90224501 |
| 20W DALI | 90244602 |

350mA power supplies on page 694

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim




| CODE       |          |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701



# DEEP ADJUST trimless

CEILING RECESSED



## 1.0 LED

LED LED 7/10W | 350/500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated

0.23kg IP20 36° 105-110 35°/35° 355° 95

|  | CODE    |
|--|---------|
|  | 112861W |
|  | 112861G |
|  | 112861B |

| LIGHT COLOUR     | LUMEN   CRI   | CODE |
|------------------|---------------|------|
| 2700K            | 530/710   >90 | 3    |
| 3000K            | 570/770   >90 | 5    |
| 4000K            | 580/800   >90 | 6    |
| 1800-2850K   16V | 330/450   >95 | 9    |

## ALWAYS USE

plasterkit 12.5, 15, 20, 25

|  | CODE     |
|--|----------|
|  | 90017209 |

power supply | 500mA

|          | CODE     |
|----------|----------|
| 10W      | 90214405 |
| 15W dim  | 90224501 |
| 20W DALI | 90244602 |

350mA power supplies on page 694

available from summer 2020

## 1.0 MR16

QR-CBC51 max. 12W | GU5.3  
12V | excl. power supply  
aluminium powder coated

0.17kg IP20 36° 105-110 35°/35° 355° 95

|  | CODE     |
|--|----------|
|  | 112810W0 |
|  | 112810G0 |
|  | 112810B0 |

## ALWAYS USE

plasterkit 12.5, 15, 20, 25

|  | CODE     |
|--|----------|
|  | 90017209 |

power supply | 12V

|         | CODE     |
|---------|----------|
| 10W dim | 90221401 |
| 25W dim | 90221701 |
| 70W dim | 90221904 |

more specs on page 699

## 1.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated

0.21kg IP20 36° 105-110 35°/35° 355° 95

|  | CODE     |
|--|----------|
|  | 112820W0 |
|  | 112820G0 |
|  | 112820B0 |

## ALWAYS USE

plasterkit 12.5, 15, 20, 25

|  | CODE     |
|--|----------|
|  | 90017209 |

PAR16 LED GU10 7W | phase-cut dim

|            | CODE     |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701






DENTAL PRACTICE COORNAERT (TANDARTSCENTRUM ATLAS) | MAISON JANE KORTRIJK | BELGIUM



# DEEP ADJUST fort

CEILING RECESSED



## 1.0 LED

LED 25W | 700mA | 36V  
COB 3-step | excl. power supply  
aluminium powder coated

0.362kg IP20 0.3-1.0 34°

126-130 30°/30° 355° 130 4-30

| CODE    |  |
|---------|--|
| 112961W |  |
| 112961B |  |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 2480   >90  | 5    |
| 4000K        | 2660   >90  | 6    |

## ALWAYS USE

power supply | 700mA

| CODE     |          |
|----------|----------|
| 30W dim  | 90225702 |
| 30W DALI | 90245702 |


more power supplies on page 697

available from summer 2020



# DEEP ASYM adjust

CEILING RECESSED



## 1.0 LED

LED 7/10W | 350/500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated

0.25kg IP20 0.3° 36°

35°/35° 355° 100 87-88 4-25

| CODE |         |  |
|------|---------|--|
|      | 112461W |  |
|      | 112461S |  |
|      | 112461G |  |
|      | 112461B |  |


| LIGHT COLOUR                   | LUMEN   CRI   | CODE |
|--------------------------------|---------------|------|
| 2700K                          | 460/610   >90 | 3    |
| 3000K                          | 470/670   >90 | 5    |
| 1800-2850K   16V 290/390   >95 |               | 9    |

## ALWAYS USE

power supply | 500mA

| CODE     |          |
|----------|----------|
| 10W      | 90214405 |
| 15W dim  | 90224501 |
| 20W DALI | 90244602 |

350mA power supplies on page 694



## 1.0 MR16

QR-CBC51 max. 12W | GU5.3  
12V | excl. power supply  
aluminium powder coated

0.19kg IP20 0.3°

35°/35° 355° 90 87-88 4-25

| CODE |          |
|------|----------|
|      | 112410W0 |
|      | 112410S0 |
|      | 112410G0 |
|      | 112410B0 |

## ALWAYS USE

power supply | 12V

| CODE    |          |
|---------|----------|
| 10W dim | 90221401 |
| 25W dim | 90221701 |
| 70W dim | 90221904 |

more specs on page 699



## 1.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated

0.23kg IP20 0.3°

35°/35° 355° 115 87-88 4-25

| CODE |          |
|------|----------|
|      | 112420W0 |
|      | 112420S0 |
|      | 112420G0 |
|      | 112420B0 |

## OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

| CODE       |          |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701





PRIVATE RESIDENCE BELGIUM



1.0 LED

LED 8W | 220-240VAC  
COB 3-step | phase-cut dim  
aluminium powder coated

0.20kg IP20 36° 28°/28° 355° 75

wire springs 79-83 4-16

| CODE |          |
|------|----------|
|      | 160168W_ |
|      | 160168B_ |

blade springs 79-83 min 4

| CODE |           |
|------|-----------|
|      | 160168W_C |
|      | 160168B_C |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 480   >90   | 3    |
| 3000K        | 500   >90   | 5    |



fits into Kaiser ThermoX® 9320-11



For wireless dimming compatible  
with Amazon Echo Plus,  
Philips Hue and Homee see  
weverducre.com/smartlighting



1.0 MR16

QR-CBC51 max. 12W | GU5.3  
12V | excl. power supply  
aluminium powder coated

0.14kg IP20 35°/35° 355° 65

wire springs 79-83 4-16

| CODE |          |
|------|----------|
|      | 160110W0 |
|      | 160110B0 |

blade springs 79-83 min 4

| CODE |           |
|------|-----------|
|      | 160110W0C |
|      | 160110B0C |

ALWAYS USE

power supply | 12V

| CODE    |          |
|---------|----------|
| 10W dim | 90221401 |
| 25W dim | 90221701 |
| 70W dim | 90221904 |

more specs on page 699

SPINEO

CEILING RECESSED



1.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated

0.18kg IP20 35°/35° 355° 70

wire springs 79-83 4-16

| CODE |          |
|------|----------|
|      | 160120W0 |
|      | 160120B0 |

blade springs 79-83 min 4

| CODE |           |
|------|-----------|
|      | 160120W0C |
|      | 160120B0C |

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

| CODE       |          |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701



1.0 LED

LED 7/10W | 350/500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated

0.34kg IP20 36°

102-104 35°/35° 355° 90

4-25

| CODE |         |  |
|------|---------|--|
|      | 110161W |  |
|      | 110161B |  |

| LIGHT COLOUR     | LUMEN   CRI   | CODE |
|------------------|---------------|------|
| 2700K            | 530/710   >90 | 3    |
| 3000K            | 570/770   >90 | 5    |
| 1800-2850K   16V | 330/450   >95 | 9    |




For wireless dimming compatible  
with Amazon Echo Plus,  
Philips Hue and Homee see  
weverducre.com/smartlighting

ALWAYS USE

power supply | 500mA

| CODE     |          |
|----------|----------|
| 10W      | 90214405 |
| 15W dim  | 90224501 |
| 20W DALI | 90244602 |

350mA power supplies on page 694



1.0 MR16

QR-CBC51 max.12W | GU5.3  
12V | excl. power supply  
aluminium powder coated

0.28kg IP20 36°

102-104 35°/35° 355° 75

4-25

| CODE |          |
|------|----------|
|      | 110110W0 |
|      | 110110B0 |

ALWAYS USE

power supply | 12V

| CODE    |          |
|---------|----------|
| 10W dim | 90221401 |
| 25W dim | 90221701 |
| 70W dim | 90221904 |

more specs on page 699



1.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated

0.32kg IP20 36°

102-104 35°/35° 355° 100

4-25

| CODE |          |
|------|----------|
|      | 110120W0 |
|      | 110120B0 |

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

| CODE       |          |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701

RONY  
CEILING RECESSED









# PIRRO

## CEILING RECESSED



p. 291



### 1.0

LED 4.5W | 500mA | 9V  
COB 3-step | excl. power supply  
aluminium powder coated | PC  
lens and reflector

0.09 kg IP20 32° 4-25

50x50 85 4-25

| CODE    |  |
|---------|--|
| 150151E |  |
| 150151J |  |
| 150151K |  |
| 150151B |  |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 380   | >90 | 3    |
| 3000K        | 405   | >90 | 5    |

### ALWAYS USE

power supply | 500mA

| CODE     |          |
|----------|----------|
| 7W dim   | 90224301 |
| 10W DALI | 90244401 |

more power supplies on page 695

### 2.0

2x LED 4.5W | 500mA | 18V total  
COB 3-step | excl. power supply  
aluminium powder coated | PC  
lens and reflector

0.155 kg IP20 32° 4-25

93x50 60 4-25

| CODE    |  |
|---------|--|
| 150251E |  |
| 150251J |  |
| 150251K |  |
| 150251B |  |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 2x380 | >90 | 3    |
| 3000K        | 2x405 | >90 | 5    |

### ALWAYS USE

power supply | 500mA (1 piece needed)

| CODE     |          |
|----------|----------|
| 15W dim  | 90224503 |
| 20W DALI | 90244603 |

more power supplies on page 695

### 4.0

4x LED 4.5W | 500mA | 36V total  
COB 3-step | excl. power supply  
aluminium powder coated | PC  
lens and reflector

0.28 kg IP20 32° 4-25

181x50 60 4-25

| CODE    |  |
|---------|--|
| 150451E |  |
| 150451J |  |
| 150451K |  |
| 150451B |  |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 4x380 | >90 | 3    |
| 3000K        | 4x405 | >90 | 5    |

### ALWAYS USE

power supply | 500mA (1 piece needed)

| CODE     |          |
|----------|----------|
| 20W dim  | 90224602 |
| 20W DALI | 90244602 |

more power supplies on page 695

### 6.0

6x LED 4.5W | 500mA | 2x27V  
COB 3-step | excl. power supply  
aluminium powder coated | PC  
lens and reflector

0.40 kg IP20 32° 4-25

269x50 60 4-25

| CODE    |  |
|---------|--|
| 150651E |  |
| 150651J |  |
| 150651K |  |
| 150651B |  |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 6x380 | >90 | 3    |
| 3000K        | 6x405 | >90 | 5    |

### ALWAYS USE

power supply | 500mA (2 pieces needed)

| CODE     |          |
|----------|----------|
| 20W dim  | 90224602 |
| 20W DALI | 90244602 |

more power supplies on page 695

# HIDDEN CHAMPIONS

## FLAT ‘N’ FANCY



Sleek built-in luminaires are subtle, elegant, and let every room shine in the brightest light. No wonder the space-saving all-rounders are among the most popular lighting choices these days. Nevertheless: There are some requirements you'll need to consider when mounting recessed luminaires. Especially low ceilings in modern living spaces or too little space in the suspended ceilings can be really tricky – and every centimetre counts. The solution: extra low recessed ceiling luminaires by Wever & Ducré. The small, compact lights have been specifically designed for low ceilings with low installation depths and are not only true space savers, but also a design highlight – perfect for renovation projects and small city apartments.

|                              |        |              |
|------------------------------|--------|--------------|
| <b>DEEP bijou 2.0</b>        | p. 169 | <b>60 MM</b> |
| <b>DEEP petit</b>            | p. 171 | <b>50 MM</b> |
| <b>DEEP ADJUST petit</b>     | p. 177 | <b>60 MM</b> |
| <b>PIRRO 2.0   4.0   6.0</b> | p. 195 | <b>60 MM</b> |
| <b>NOP petit</b>             | p. 199 | <b>60 MM</b> |
| <b>CENO 2.0   3.0</b>        | p. 225 | <b>60 MM</b> |
| <b>BLIEK ROUND petit</b>     | p. 227 | <b>60 MM</b> |

## HOCH HINAUS

Schlichte Einbauleuchten halten sich optisch elegant im Hintergrund, während sie jeden Raum in seinem besten Licht erstrahlen lassen. Kein Wunder also, dass die platzsparenden Alleskönner so beliebt sind. Trotzdem: Gewisse Voraussetzungen müssen für den Einbau gegeben sein. Denn vor allem mit niedrigen Deckenhöhen in modernen Wohnräumen oder zu wenig Platz in den Zwischendecken kann es schon mal ganz schön knifflig werden – dabei zählt jeder Zentimeter. Die Lösung: besonders flache Einbauleuchten von Wever & Ducré. Die kleinen, kompakten Leuchten wurden speziell für niedrige Räume mit wenig Einbautiefe entwickelt und sind nicht nur platzsparend, sondern vor allem auch ein echtes Designhighlight – perfekt für Renovierungsprojekte und kleine City-Apartments.

|                         |        |              |
|-------------------------|--------|--------------|
| <b>RINI IP44</b>        | p. 251 | <b>60 MM</b> |
| <b>RINI SNEAK IP44</b>  | p. 255 | <b>46 MM</b> |
| <b>LUNA ROUND IP44</b>  | p. 253 | <b>50 MM</b> |
| <b>LUNA SQUARE IP44</b> | p. 257 | <b>50 MM</b> |
| <b>MIRBI IP44</b>       | p. 261 | <b>50 MM</b> |
| <b>CITY IP44</b>        | p. 263 | <b>50 MM</b> |

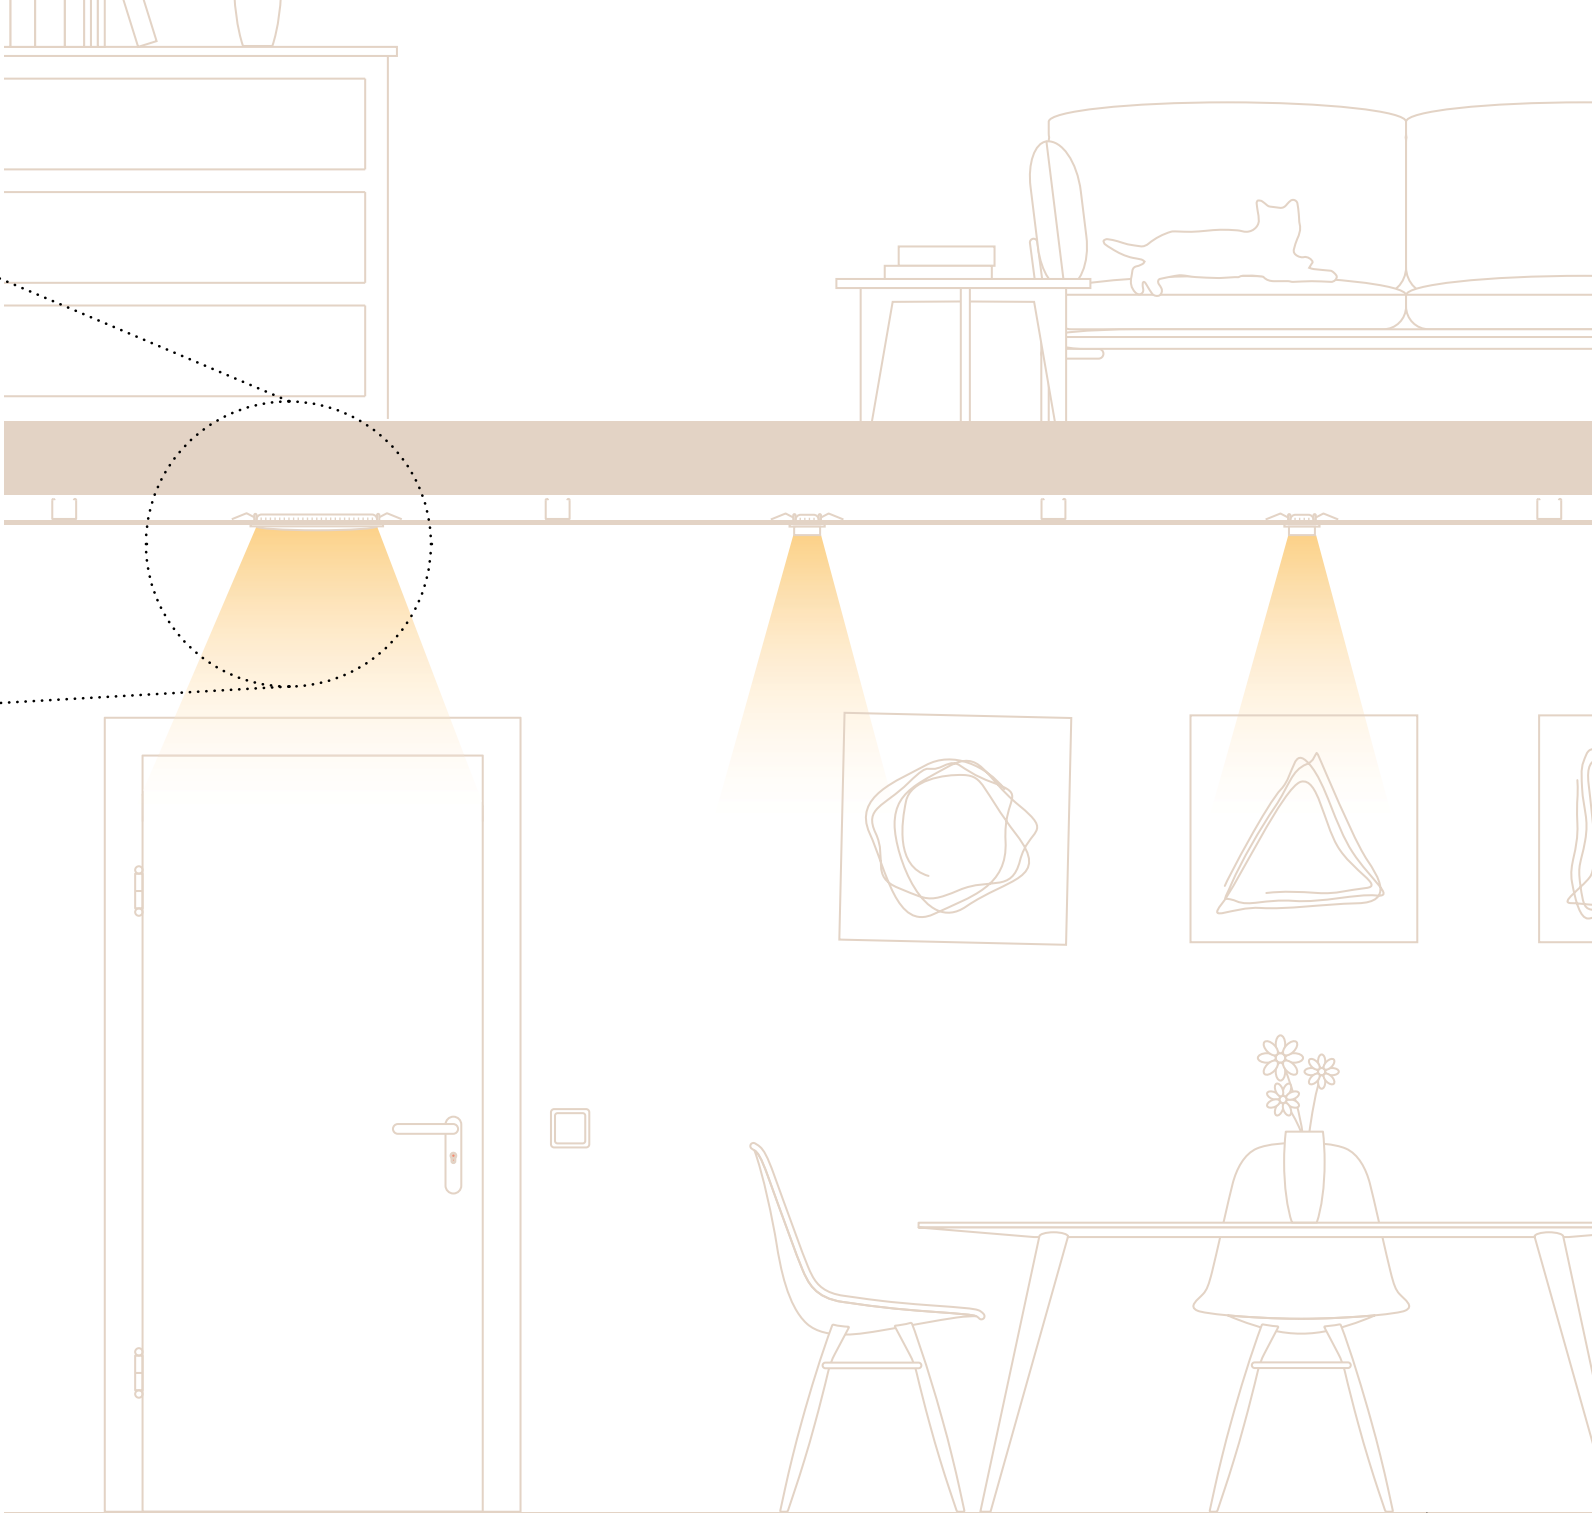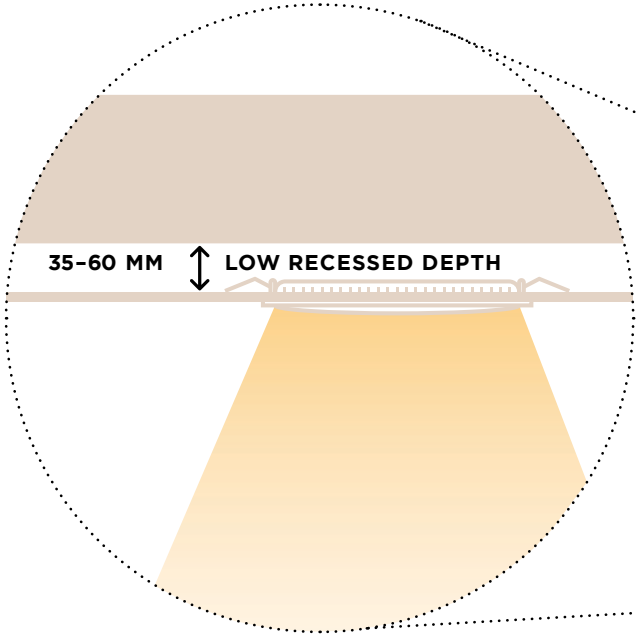






PRIVATE RESIDENCE BELGIUM



# NOP petit

CEILING RECESSED



## 1.0 LED

LED 6W | 350mA | 18V  
COB 3-step | excl. power supply  
aluminium powder coated  
round cut out for mounting

0.18kg IP20 34°

35°/35° 355° 60

wire springs 68-70 4-13

| CODE |          |
|------|----------|
|      | 130561W_ |
|      | 130561S_ |
|      | 130561B_ |

blade springs 70-76 min 4

| CODE |           |
|------|-----------|
|      | 130561W_C |
|      | 130561S_C |
|      | 130561B_C |

| LIGHT COLOUR     | LUMEN   CRI | CODE |
|------------------|-------------|------|
| 2700K            | 540   >90   | 3    |
| 3000K            | 570   >90   | 5    |
| 1800-2700K   15V | 350   >95   | 9    |

## ALWAYS USE


power supply | 350mA

| CODE     |          |
|----------|----------|
| 10W      | 90223401 |
| 10W dim  | 90223402 |
| 20W DALI | 90243601 |

more power supplies on page 695







fits in round  
cut out



low recessed  
depth



fits into Kaiser ThermoX® 9320-11



1.0 LED

 LED 8W | 220-240VAC  
COB 3-step | phase-cut dim  
aluminium powder coated  
round cut out for mounting

 0.26kg  IP20  36°

 30°/30°  355°  95

wire springs  83-86  4-30

| CODE                                                                                  |          |
|---------------------------------------------------------------------------------------|----------|
|    | 130468W_ |
|   | 130468S_ |
|  | 130468B_ |

blade springs  83-92  min 4

| CODE                                                                                  |           |
|---------------------------------------------------------------------------------------|-----------|
|  | 130468W_C |
|  | 130468S_C |
|  | 130468B_C |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 480   >90   | 3    |
| 3000K        | 500   >90   | 5    |

1.0 MR16

 QR-CBC51 max. 12W | GU5.3  
12V | excl. power supply  
aluminium powder coated  
round cut out for mounting

 0.11kg  IP20  3°

 35°/35°  95

wire springs  83-86  4-30

| CODE                                                                                  |          |
|---------------------------------------------------------------------------------------|----------|
|    | 130410W0 |
|   | 130410S0 |
|  | 130410B0 |

blade springs  83-92  min 4

| CODE                                                                                  |           |
|---------------------------------------------------------------------------------------|-----------|
|  | 130410W0C |
|  | 130410S0C |
|  | 130410B0C |

ALWAYS USE

power supply | 12V

| CODE    |          |
|---------|----------|
| 10W dim | 90221401 |
| 25W dim | 90221701 |
| 70W dim | 90221904 |

more specs on page 699

1.0 PAR16

 PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
round cut out for mounting

 0.14kg  IP20  3°

 35°/35°  83

wire springs  83-86  4-30

| CODE                                                                                  |          |
|---------------------------------------------------------------------------------------|----------|
|    | 130420W0 |
|   | 130420S0 |
|  | 130420B0 |

blade springs  83-92  min 4


| CODE                                                                                  |           |
|---------------------------------------------------------------------------------------|-----------|
|  | 130420W0C |
|  | 130420S0C |
|  | 130420B0C |

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

| CODE       |          |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701



fits into Kaiser ThermoX® 9320-11

NOP  
CEILING RECESSED





# RON

## CEILING RECESSED

### 1.0 LED

LED 7/10W | 350/500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated  
round cut-out for mounting

0.36kg IP20 36°

⌀102-104 ⌀35°/35° ⌀355° ⌈⌋ 90

€4-25

### 1.0 MR16

QR-CBC51 max. 12W | GU5.3  
12V | excl. power supply  
aluminium powder coated  
round cut-out for mounting

0.30kg IP20 35°

⌀102-104 ⌀35°/35° ⌀355° ⌈⌋ 75

€4-25

### 1.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
round cut-out for mounting

0.34kg IP20 35°

⌀102-104 ⌀35°/35° ⌀355° ⌈⌋ 100

€4-25

| CODE |          |
|------|----------|
|      | 111110W_ |
|      | 111110B_ |

| LIGHT COLOUR     | LUMEN   CRI   | CODE |
|------------------|---------------|------|
| 2700K            | 530/710   >90 | 3    |
| 3000K            | 570/770   >90 | 5    |
| 1800-2850K   16V | 330/450   >95 | 9    |

| CODE |          |
|------|----------|
|      | 111120W0 |
|      | 111120B0 |

| LIGHT COLOUR     | LUMEN   CRI   | CODE |
|------------------|---------------|------|
| 2700K            | 530/710   >90 | 3    |
| 3000K            | 570/770   >90 | 5    |
| 1800-2850K   16V | 330/450   >95 | 9    |

| CODE |          |
|------|----------|
|      | 111120W0 |
|      | 111120B0 |

| LIGHT COLOUR     | LUMEN   CRI   | CODE |
|------------------|---------------|------|
| 2700K            | 530/710   >90 | 3    |
| 3000K            | 570/770   >90 | 5    |
| 1800-2850K   16V | 330/450   >95 | 9    |

fits in round cut out

For wireless dimming compatible with Amazon Echo Plus, Philips Hue and Homee see page 241.

### ALWAYS USE

power supply | 500mA

| CODE     |          |
|----------|----------|
| 10W      | 90214405 |
| 15W dim  | 90224501 |
| 20W DALI | 90244602 |

350mA power supplies on page 694

### ALWAYS USE

power supply | 12V

| CODE    |          |
|---------|----------|
| 10W dim | 90221401 |
| 25W dim | 90221701 |
| 70W dim | 90221904 |

more specs on page 699

### OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

| CODE       |          |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701


WEVER & DUCRÉ 202 — 203



PRIVATE RESIDENCE | SIGGA ARCHITECTS, ANTTI KORPI | LIGHTING DESIGN TECLUX OY + SIGGE / ANTTI KORPI FINLAND



For wireless dimming compatible with Amazon Echo Plus, Philips Hue and Homee see [weverducre.com/smartlighting](http://weverducre.com/smartlighting)



2.0 LED

2x LED 7/10W | 350/500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated  
1800-2850K 16V

0.73kg IP20 36°

102x210 35°/35° 355° 90 4-25

| CODE |          |  |  |
|------|----------|--|--|
|      | 111261W_ |  |  |
|      | 111261B_ |  |  |


| LIGHT COLOUR | LUMEN   CRI     | CODE |
|--------------|-----------------|------|
| 2700K        | 2x530/710   >90 | 3    |
| 3000K        | 2x570/770   >90 | 5    |
| 1800-2850K   | 2x330/450   >95 | 9    |

ALWAYS USE

power supply | 500mA

| CODE     |          |
|----------|----------|
| 10W      | 90214405 |
| 15W dim  | 90224501 |
| 20W DALI | 90244602 |

350mA power supplies on page 694



3.0 LED

3x LED 7/10W | 350/500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated  
1800-2850K 16V

1.08kg IP20 36°

102x320 35°/35° 355° 90 4-25

| CODE |          |  |  |
|------|----------|--|--|
|      | 111361W_ |  |  |
|      | 111361B_ |  |  |


| LIGHT COLOUR | LUMEN   CRI     | CODE |
|--------------|-----------------|------|
| 2700K        | 3x530/710   >90 | 3    |
| 3000K        | 3x570/770   >90 | 5    |
| 1800-2850K   | 3x330/450   >95 | 9    |

ALWAYS USE

power supply | 500mA

| CODE     |          |
|----------|----------|
| 10W      | 90214405 |
| 15W dim  | 90224501 |
| 20W DALI | 90244602 |

350mA power supplies on page 694



2.0 PAR16

2x PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated

0.69kg IP20 36°

102x210 35°/35° 355° 100 4-25

| CODE |          |  |  |
|------|----------|--|--|
|      | 111220W0 |  |  |
|      | 111220B0 |  |  |


| LIGHT COLOUR | LUMEN   CRI     | CODE |
|--------------|-----------------|------|
| 2700K        | 3x530/710   >90 | 3    |
| 3000K        | 3x570/770   >90 | 5    |
| 1800-2850K   | 3x330/450   >95 | 9    |

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

| CODE       |          |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701



3.0 PAR16

3x PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated

1.02kg IP20 36°

102x320 35°/35° 355° 100 4-25

| CODE |          |  |  |
|------|----------|--|--|
|      | 111320W0 |  |  |
|      | 111320B0 |  |  |

| LIGHT COLOUR | LUMEN   CRI     | CODE |
|--------------|-----------------|------|
| 2700K        | 3x530/710   >90 | 3    |
| 3000K        | 3x570/770   >90 | 5    |
| 1800-2850K   | 3x330/450   >95 | 9    |

OPTIONAL



PAR16 LED GU10 7W | phase-cut dim

| CODE       |          |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701

RON  
CEILING RECESSED





### 1.0 LED

 LED 6W | 350mA | 18V  
COB 3-step | excl. power supply  
aluminium powder coated

  0.08kg  IP20  34°

 54x59  25°/25°  355°  65  2-22

| CODE                                                                                  |          |
|---------------------------------------------------------------------------------------|----------|
|   | 162161W_ |
|  | 162161Q_ |
|  | 162161B_ |


| LIGHT COLOUR     | LUMEN | CRI | CODE |
|------------------|-------|-----|------|
| 2700K            | 540   | >90 | 3    |
| 3000K            | 570   | >90 | 5    |
| 1800-2700K   15V | 360   | >95 | 9    |

### ALWAYS USE

power supply | 350mA

| CODE     |          |
|----------|----------|
| 10W      | 90223401 |
| 10W dim  | 90223402 |
| 20W DALI | 90243601 |

more power supplies on page 695



### 2.0 LED

 2x LED 6W | 350mA | 18V  
COB 3-step | excl. power supply  
aluminium powder coated

  0.15kg  IP20  34°

 54x110  25°/25°  355°  65  2-22

| CODE                                                                                  |          |
|---------------------------------------------------------------------------------------|----------|
|   | 162261W_ |
|  | 162261Q_ |
|  | 162261B_ |


| LIGHT COLOUR     | LUMEN | CRI | CODE |
|------------------|-------|-----|------|
| 2700K            | 2x540 | >90 | 3    |
| 3000K            | 2x570 | >90 | 5    |
| 1800-2700K   15V | 2x360 | >95 | 9    |

### ALWAYS USE

power supply | 350mA

| CODE     |          |
|----------|----------|
| 10W      | 90223401 |
| 10W dim  | 90223402 |
| 20W DALI | 90243601 |

more power supplies on page 695



### 3.0 LED

 3x LED 6W | 350mA | 18V  
COB 3-step | excl. power supply  
aluminium powder coated

  0.22kg  IP20  34°

 54x162  25°/25°  355°  65  2-22

| CODE                                                                                  |          |
|---------------------------------------------------------------------------------------|----------|
|   | 162361W_ |
|  | 162361Q_ |
|  | 162361B_ |


| LIGHT COLOUR     | LUMEN | CRI | CODE |
|------------------|-------|-----|------|
| 2700K            | 3x540 | >90 | 3    |
| 3000K            | 3x570 | >90 | 5    |
| 1800-2700K   15V | 3x360 | >95 | 9    |

### ALWAYS USE

power supply | 350mA

| CODE     |          |
|----------|----------|
| 10W      | 90223401 |
| 10W dim  | 90223402 |
| 20W DALI | 90243601 |


more power supplies on page 695



For wireless dimming compatible  
with Amazon Echo Plus, Philips Hue  
and Homee see page 241.

# PLANO

CEILING RECESSED



## 1.0 LED

LED 7/10W | 350/500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated  
1800-2850K 16V

0.26kg IP20 36°

74x78 35°/35° 355° 95 2-18

|  | CODE     |
|--|----------|
|  | 118161W_ |
|  | 118161S_ |
|  | 118161Q_ |
|  | 118161B_ |

| LIGHT COLOUR | LUMEN   | CRI | CODE |
|--------------|---------|-----|------|
| 2700K        | 510/680 | >90 | 3    |
| 3000K        | 550/740 | >90 | 5    |
| 1800-2850K   | 330/450 | >95 | 9    |

## ALWAYS USE


power supply | 500mA

|          | CODE     |
|----------|----------|
| 10W      | 90214405 |
| 15W dim  | 90224501 |
| 20W DALI | 90244602 |

350mA power supplies on page 694

## OPTIONAL

|            | CODE     |
|------------|----------|
| plasterkit | 90017104 |



## 2.0 LED

2x LED 7/10W | 350/500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated  
1800-2850K 16V

0.48kg IP20 36°

74x148 35°/35° 355° 95 2-18

|  | CODE     |
|--|----------|
|  | 118261W_ |
|  | 118261S_ |
|  | 118261Q_ |
|  | 118261B_ |

| LIGHT COLOUR | LUMEN     | CRI | CODE |
|--------------|-----------|-----|------|
| 2700K        | 2x510/680 | >90 | 3    |
| 3000K        | 2x550/740 | >90 | 5    |
| 1800-2850K   | 2x330/450 | >95 | 9    |

## ALWAYS USE


power supply | 500mA

|          | CODE     |
|----------|----------|
| 10W      | 90214405 |
| 15W dim  | 90224501 |
| 20W DALI | 90244602 |

350mA power supplies on page 694

## OPTIONAL

|            | CODE     |
|------------|----------|
| plasterkit | 90017105 |



## 1.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated

0.24kg IP20 36°

74x78 35°/35° 355° 120 2-18

|  | CODE     |
|--|----------|
|  | 118120W0 |
|  | 118120S0 |
|  | 118120Q0 |
|  | 118120B0 |

## OPTIONAL


PAR16 LED GU10 7W | phase-cut dim

|            | CODE     |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701

## OPTIONAL

|            | CODE     |
|------------|----------|
| plasterkit | 90017104 |



## 2.0 PAR16

2x PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated

0.44kg IP20 36°

74x148 35°/35° 355° 120 2-18

|  | CODE     |
|--|----------|
|  | 118220W0 |
|  | 118220S0 |
|  | 118220Q0 |
|  | 118220B0 |

## OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

|            | CODE     |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701

## OPTIONAL

|            | CODE     |
|------------|----------|
| plasterkit | 90017105 |






PRIVATE RESIDENCE OBUMEX – STEENOVEN BELGIUM

# PLANO ADJUST fort

CEILING RECESSED



## 1.0 LED

LED 25W | 700mA | 36V  
COB 3-step | excl. power supply  
aluminium powder coated

0.381kg IP20 0.3-0.34°

111x111 30°/30° 355° 130 4-30

| CODE        |          |
|-------------|----------|
| <div></div> | 118961W_ |
| <div></div> | 118961B_ |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 2480   >90  | 5    |
| 4000K        | 2660   >90  | 6    |

## ALWAYS USE

power supply | 700mA

| CODE     |          |
|----------|----------|
| 30W dim  | 90225702 |
| 30W DALI | 90245702 |


more power supplies on page 697

available from summer 2020



# STRANGE petit

CEILING RECESSED



## 1.0 LED

LED 6W | 350mA | 18V  
COB 3-step | excl. power supply  
aluminium powder coated

0.07kg IP20 31°  
25°/25° 355° 65

| CODE    |  |
|---------|--|
| 163161W |  |
| 163161B |  |


| LIGHT COLOUR     | LUMEN | CRI | CODE |
|------------------|-------|-----|------|
| 2700K            | 540   | >90 | 3    |
| 3000K            | 570   | >90 | 5    |
| 1800-2700K   15V | 360   | >95 | 9    |

## ALWAYS USE

|                                   |      |
|-----------------------------------|------|
| plastic plasterkit 68x68 10 or 13 | CODE |
| 90017200                          |      |
| 90017201                          |      |

|                                 |  |
|---------------------------------|--|
| aluminium plasterkit 64x64 7-17 |  |
| 90017202                        |  |

|                                 |          |
|---------------------------------|----------|
| power supply   350mA            | CODE     |
| 10W                             | 90223401 |
| 10W dim                         | 90223402 |
| 20W DALI                        | 90243601 |
| more power supplies on page 695 |          |



## 2.0 LED

2x LED 6W | 350mA | 18V  
COB 3-step | excl. power supply  
aluminium powder coated

0.13kg IP20 31°  
25°/25° 355° 65

| CODE    |  |
|---------|--|
| 163261W |  |
| 163261B |  |


| LIGHT COLOUR     | LUMEN | CRI | CODE |
|------------------|-------|-----|------|
| 2700K            | 2x540 | >90 | 3    |
| 3000K            | 2x570 | >90 | 5    |
| 1800-2700K   15V | 2x360 | >95 | 9    |

## ALWAYS USE

|                                    |      |
|------------------------------------|------|
| plastic plasterkit 68x119 10 or 13 | CODE |
| 90017203                           |      |
| 90017204                           |      |

|                                  |  |
|----------------------------------|--|
| aluminium plasterkit 64x117 7-17 |  |
| 90017205                         |  |

|                                 |          |
|---------------------------------|----------|
| power supply   350mA            | CODE     |
| 10W                             | 90223401 |
| 10W dim                         | 90223402 |
| 20W DALI                        | 90243601 |
| more power supplies on page 695 |          |



## 3.0 LED

3x LED 6W | 350mA | 18V  
COB 3-step | excl. power supply  
aluminium powder coated

0.19kg IP20 31°  
25°/25° 355° 65

| CODE    |  |
|---------|--|
| 163361W |  |
| 163361B |  |

| LIGHT COLOUR     | LUMEN | CRI | CODE |
|------------------|-------|-----|------|
| 2700K            | 3x540 | >90 | 3    |
| 3000K            | 3x570 | >90 | 5    |
| 1800-2700K   15V | 3x360 | >95 | 9    |

## ALWAYS USE

|                                    |      |
|------------------------------------|------|
| plastic plasterkit 68x171 10 or 13 | CODE |
| 90017206                           |      |
| 90017207                           |      |

|                                  |  |
|----------------------------------|--|
| aluminium plasterkit 64x169 7-17 |  |
| 90017208                         |  |

|                                 |          |
|---------------------------------|----------|
| power supply   350mA            | CODE     |
| 10W                             | 90223401 |
| 10W dim                         | 90223402 |
| 20W DALI                        | 90243601 |
| more power supplies on page 695 |          |





For wireless dimming compatible  
with Amazon Echo Plus, Philips Hue  
and Homee see page 241.

### 1.0 LED

LED 7/10W | 350/500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated  
1800-2850K 16V

0.43kg IP20 36° 35°/35° 355° 95

| CODE |         |  |  |
|------|---------|--|--|
|      | 131161W |  |  |
|      | 131161B |  |  |

| LIGHT COLOUR | LUMEN   | CRI | CODE |
|--------------|---------|-----|------|
| 2700K        | 510/680 | >90 | 3    |
| 3000K        | 550/740 | >90 | 5    |
| 1800-2850K   | 330/450 | >95 | 9    |

### ALWAYS USE

plastic plasterkit 86x86 10 or 13

| CODE |          |
|------|----------|
|      | 90017122 |
|      | 90017116 |

aluminium plasterkit 86x86 8-32

|  |          |
|--|----------|
|  | 90017120 |
|--|----------|

power supply | 500mA

| CODE     |          |
|----------|----------|
| 10W      | 90214405 |
| 15W dim  | 90224501 |
| 20W DALI | 90244602 |

350mA power supplies on page 694

### 2.0 LED

2x LED 7/10W | 350/500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated  
1800-2850K 16V

0.74kg IP20 36° 35°/35° 355° 95

| CODE |         |
|------|---------|
|      | 131261W |
|      | 131261B |

| LIGHT COLOUR | LUMEN     | CRI | CODE |
|--------------|-----------|-----|------|
| 2700K        | 2x510/680 | >90 | 3    |
| 3000K        | 2x550/740 | >90 | 5    |
| 1800-2850K   | 2x330/450 | >95 | 9    |

### ALWAYS USE

plastic plasterkit 86x156 10 or 13

| CODE |          |
|------|----------|
|      | 90017123 |
|      | 90017117 |

aluminium plasterkit 86x156 8-32

|  |          |
|--|----------|
|  | 90017121 |
|--|----------|

power supply | 500mA

| CODE     |          |
|----------|----------|
| 10W      | 90214405 |
| 15W dim  | 90224501 |
| 20W DALI | 90244602 |

350mA power supplies on page 694

### 1.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated

0.41kg IP20 36° 35°/35° 355° 120

| CODE |          |
|------|----------|
|      | 131120W0 |
|      | 131120B0 |

### ALWAYS USE

plastic plasterkit 86x86 10 or 13

| CODE |          |
|------|----------|
|      | 90017122 |
|      | 90017116 |

aluminium plasterkit 86x86 8-32

|  |          |
|--|----------|
|  | 90017120 |
|--|----------|

### OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

| CODE       |          |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701

### 2.0 PAR16

2x PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated

0.70kg IP20 36° 35°/35° 355° 120

| CODE |          |
|------|----------|
|      | 131220W0 |
|      | 131220B0 |

### ALWAYS USE

plastic plasterkit 86x156 10 or 13

| CODE |          |
|------|----------|
|      | 90017123 |
|      | 90017117 |

aluminium plasterkit 86x156 8-32



|  |          |
|--|----------|
|  | 90017121 |
|--|----------|

### OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

| CODE       |          |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701

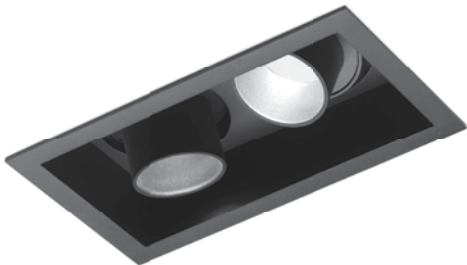

1.0 LED

LED 7/10W | 350/500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated  
1800-2850K 16V

0.19 kg IP20 0.3 28°

74x78 35°/35° 355° 95 2-18

| CODE |         |  |  |
|------|---------|--|--|
|      | 155351W |  |  |
|      | 155351B |  |  |
|      | 155351K |  |  |

| LIGHT COLOUR | LUMEN   CRI   | CODE |
|--------------|---------------|------|
| 2700K        | 400/530   >90 | 3    |
| 3000K        | 410/550   >90 | 5    |
| 1800-2850K   | 250/340   >95 | 9    |


ALWAYS USE

power supply | 500mA

| CODE     |          |
|----------|----------|
| 10W      | 90214405 |
| 15W dim  | 90224501 |
| 20W DALI | 90244602 |

350mA power supplies on page 694

CEILING RECESSED



2.0 LED

2x LED 7/10W | 350/500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated  
1800-2850K 16V

0.34 kg IP20 0.3 28°

74x148 35°/35° 355° 95 2-18

| CODE |         |  |  |
|------|---------|--|--|
|      | 155451W |  |  |
|      | 155451B |  |  |
|      | 155451K |  |  |


| LIGHT COLOUR | LUMEN   CRI     | CODE |
|--------------|-----------------|------|
| 2700K        | 2x400/530   >90 | 3    |
| 3000K        | 2x410/550   >90 | 5    |
| 1800-2850K   | 2x250/340   >95 | 9    |

ALWAYS USE

power supply | 500mA

| CODE     |          |
|----------|----------|
| 10W      | 90214405 |
| 15W dim  | 90224501 |
| 20W DALI | 90244602 |




350mA power supplies on page 694








PRIVATE RESIDENCE OBUMEX – STEENOVEN BELGIUM



# SNEAK TRIMLESS

CEILING RECESSED



## 1.0 LED

LED 7/10W | 350/500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated  
1800-2850K 16V

0.19 kg IP20 35°/35° 355° 95

35°/35° 355° 95

|  | CODE     |
|--|----------|
|  | 155151W_ |
|  | 155151B_ |
|  | 155151K_ |

| LIGHT COLOUR | LUMEN   CRI   | CODE |
|--------------|---------------|------|
| 2700K        | 400/530   >90 | 3    |
| 3000K        | 410/550   >90 | 5    |
| 1800-2850K   | 250/340   >95 | 9    |

## ALWAYS USE

plastic plasterkit 86x86 10 or 13

|  | CODE     |
|--|----------|
|  | 90017122 |
|  | 90017116 |


aluminium plasterkit 86x86 8-32

|  |          |
|--|----------|
|  | 90017120 |
|--|----------|

power supply | 500mA

|          | CODE     |
|----------|----------|
| 10W      | 90214405 |
| 15W dim  | 90224501 |
| 20W DALI | 90244602 |

350mA power supplies on page 694



## 2.0 LED

2x LED 7/10W | 350/500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated  
1800-2850K 16V

0.34 kg IP20 35°/35° 355° 95

35°/35° 355° 95

|  | CODE     |
|--|----------|
|  | 155251W_ |
|  | 155251B_ |
|  | 155251K_ |

| LIGHT COLOUR | LUMEN   CRI     | CODE |
|--------------|-----------------|------|
| 2700K        | 2x400/530   >90 | 3    |
| 3000K        | 2x410/550   >90 | 5    |
| 1800-2850K   | 2x250/340   >95 | 9    |

## ALWAYS USE

plastic plasterkit 86x156 10 or 13

|  | CODE     |
|--|----------|
|  | 90017123 |
|  | 90017117 |

aluminium plasterkit 86x156 8-32

|  |          |
|--|----------|
|  | 90017121 |
|--|----------|

power supply | 500mA

|          | CODE     |
|----------|----------|
| 10W      | 90214405 |
| 15W dim  | 90224501 |
| 20W DALI | 90244602 |


350mA power supplies on page 694



PRIVATE RESIDENCE | CASA LLAMP | MALLORCA PRIME SPAIN

# PYRAMID

CEILING RECESSED



### 1.0 LED


**LED** LED 7/10W | 350/500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated  
1800-2850K 16V

  0.28kg  IP20  3-0.3-D  36°

 102x102  35°/35°  355°  90  4-30

| CODE                                                                                  |         |                                                                                       |  |
|---------------------------------------------------------------------------------------|---------|---------------------------------------------------------------------------------------|--|
|  | 113161W |  |  |

| LIGHT COLOUR | LUMEN   | CRI | CODE |
|--------------|---------|-----|------|
| 2700K        | 490/660 | >90 | 3    |
| 3000K        | 530/720 | >90 | 5    |
| 1800-2850K   | 310/410 | >95 | 9    |



### 2.0 LED


**LED** 2x LED 7/10W | 350/500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated  
1800-2850K 16V

  0.50kg  IP20  3-0.3-D  36°

 102x172  35°/35°  355°  90  4-30

| CODE                                                                                  |         |                                                                                       |  |
|---------------------------------------------------------------------------------------|---------|---------------------------------------------------------------------------------------|--|
|  | 113261W |  |  |

| LIGHT COLOUR | LUMEN     | CRI | CODE |
|--------------|-----------|-----|------|
| 2700K        | 2x490/660 | >90 | 3    |
| 3000K        | 2x530/720 | >90 | 5    |
| 1800-2850K   | 2x310/410 | >95 | 9    |



### 1.0 PAR16

 PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated

  0.26kg  IP20  3-0.3-D

 102x102  35°/35°  355°  115  4-30


| CODE                                                                                  |          |                                                                                       |  |
|---------------------------------------------------------------------------------------|----------|---------------------------------------------------------------------------------------|--|
|  | 113120W0 |  |  |

### OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

| CODE       |          |            |          |
|------------|----------|------------|----------|
| 2700K      | 901228W2 | 2700K      | 901228W2 |
| 3000K      | 901228W4 | 3000K      | 901228W4 |
| 1800-2850K | 901229S9 | 1800-2850K | 901229S9 |

more lamps and specs on page 701



### 2.0 PAR16

 2x PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated

  0.46kg  IP20  3-0.3-D

 102x172  35°/35°  355°  115  4-30

| CODE                                                                                  |          |                                                                                       |  |
|---------------------------------------------------------------------------------------|----------|---------------------------------------------------------------------------------------|--|
|  | 113220W0 |  |  |

### OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

| CODE       |          |            |          |
|------------|----------|------------|----------|
| 2700K      | 901228W2 | 2700K      | 901228W2 |
| 3000K      | 901228W4 | 3000K      | 901228W4 |
| 1800-2850K | 901229S9 | 1800-2850K | 901229S9 |

more lamps and specs on page 701



For wireless dimming compatible  
with Amazon Echo Plus, Philips Hue  
and Homee see page 241.

### ALWAYS USE

power supply | 500mA

| CODE     |          |          |          |
|----------|----------|----------|----------|
| 10W      | 90214405 | 10W      | 90214405 |
| 15W dim  | 90224501 | 15W dim  | 90224501 |
| 20W DALI | 90244602 | 20W DALI | 90244602 |

350mA power supplies on page 694

### ALWAYS USE

power supply | 500mA

| CODE     |          |          |          |
|----------|----------|----------|----------|
| 10W      | 90214405 | 10W      | 90214405 |
| 15W dim  | 90224501 | 15W dim  | 90224501 |
| 20W DALI | 90244602 | 20W DALI | 90244602 |

350mA power supplies on page 694






available from summer 2020



RUVI  
CEILING RECESSED



1.0

LED G95 max. 12W | E27  
220-240VAC | 50-60Hz  
aluminium powder coated

54-57 90 4-30 0.16kg IP20

54-57 90 4-30

CODE  
1671E0B0


OPTIONAL

G95 LED E27 6W 400lm 2200K  
CODE  
gold mirror 9003E151

G95 LED E27 6W 500lm 2700K  
CODE  
gold mirror 9003E142  
silver mirror 9003E149

G95 LED FILAMENT | E27 6W  
450lm 2200K  
CODE  
clear 9003E111  
more lamps and specs on page 703






only for 2.0 + 3.0 LED version





available from summer 2020

# CENO

## CEILING RECESSED



p. 317 p. 347

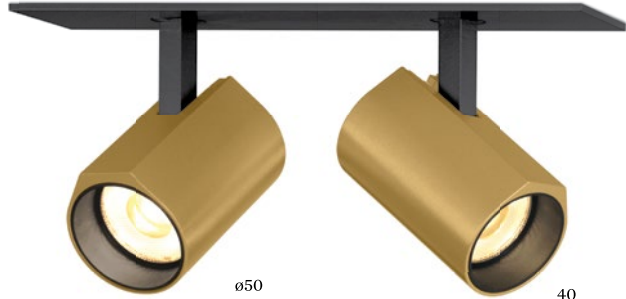

### 1.0 LED

LED 6W | 350mA | 18V  
COB 3-step | excl. power supply  
aluminium powder coated

0.12kg IP20 35° 45-47 90° 350° 85 4-25

45-47 90° 350° 85 4-25

|  | CODE    |
|--|---------|
|  | 166161W |
|  | 166161G |
|  | 166161B |
|  | 166161K |
|  | 166161Q |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 440   | >90 | 3    |
| 3000K        | 470   | >90 | 5    |
| 1800-2700K   | 320   | >95 | 9    |

### ALWAYS USE

power supply | 350mA

|          | CODE     |
|----------|----------|
| 10W dim  | 90223402 |
| 10W DALI | 90243401 |

more power supplies on page 695

### 2.0 LED

2x LED 6W | 700mA | 18V total  
COB 3-step | excl. power supply  
aluminium powder coated

0.26kg IP20 35° 32x145 90° 350° 60 8-25

32x145 90° 350° 60 8-25

|  | CODE    |
|--|---------|
|  | 166261W |
|  | 166261G |
|  | 166261B |
|  | 166261K |
|  | 166261Q |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 2x440 | >90 | 3    |
| 3000K        | 2x470 | >90 | 5    |

### ALWAYS USE

power supply | 700mA (1 piece needed)

|          | CODE     |
|----------|----------|
| 15W dim  | 90225502 |
| 20W DALI | 90245602 |

more power supplies on page 697

### 3.0 LED

3x LED 6W | 700mA | 27V total  
COB 3-step | excl. power supply  
aluminium powder coated

0.39kg IP20 35° 32x221 90° 350° 60 8-25

32x221 90° 350° 60 8-25

|  | CODE    |
|--|---------|
|  | 166461W |
|  | 166461G |
|  | 166461B |
|  | 166461K |
|  | 166461Q |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 3x440 | >90 | 3    |
| 3000K        | 3x470 | >90 | 5    |


### ALWAYS USE

power supply | 700mA (1 piece needed)

|          | CODE     |
|----------|----------|
| 20W dim  | 90225604 |
| 20W DALI | 90245602 |

more power supplies on page 697






available from summer 2020

# BLIEK ROUND petit

CEILING RECESSED



## 1.0 LED

LED 6W | 700mA | 9V  
COB 3-step | excl. power supply  
aluminium powder coated

0.20kg IP20 0.3° 35°

86-89 60° 355° 60 4-23

|  | CODE    |
|--|---------|
|  | 164161W |
|  | 164161B |
|  | 164161K |


| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 440   >90   | 3    |
| 3000K        | 470   >90   | 5    |

## ALWAYS USE

power supply | 700mA

|          | CODE     |
|----------|----------|
| 10W dim  | 90225402 |
| 10W DALI | 90245401 |

more power supplies on page 697



## 2.0 LED

2x LED 6W | 700mA | 18V total  
COB 3-step | excl. power supply  
aluminium powder coated

0.40kg IP20 0.3° 35°

87x176 60° 355° 60 4-23

|  | CODE    |
|--|---------|
|  | 164261W |
|  | 164261B |
|  | 164261K |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 2x440   >90 | 3    |
| 3000K        | 2x470   >90 | 5    |

## ALWAYS USE

power supply | 700mA (1 piece needed)

|          | CODE     |
|----------|----------|
| 15W dim  | 90225502 |
| 20W DALI | 90245602 |



more power supplies on page 697



available from summer 2020

# BLIEK ROUND

CEILING RECESSED



## 1.0 LED

LED 7/10W | 350/500mA | 18V  
COB 3-step | excl. power supply  
aluminium powder coated

0.45kg IP20 0.3° 36°

126-130 60° 355° 75 4-30

|  | CODE    |
|--|---------|
|  | 125161W |
|  | 125161B |
|  | 125161K |

| LIGHT COLOUR | LUMEN       | CRI | CODE |
|--------------|-------------|-----|------|
| 2700K        | 540/740     | >90 | 3    |
| 3000K        | 490/790     | >90 | 5    |
| 4000K        | 630/840     | >90 | 6    |
| 1800-2850K   | 16V 300/410 | >95 | 9    |

## ALWAYS USE

power supply | 500mA

|          | CODE     |
|----------|----------|
| 10W      | 90214405 |
| 15W dim  | 90224501 |
| 20W DALI | 90244602 |

more power supplies on page 695

## 1.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated

0.42kg IP20 0.3°

127 60° 350° 75 4-30

|  | CODE     |
|--|----------|
|  | 125120W0 |
|  | 125120B0 |
|  | 125120K0 |


## ALWAYS USE

PAR16 LED GU10 7W | phase-cut dim

|            | CODE     |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701







B

# SPYDER

CEILING RECESSED



## 1.0 LED

LED 7/10W | 350/500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium | steel powder coated

1.10kg IP20 36° 355° 90 4-33

146-148 85° 355° 90 4-33

| CODE    |  |
|---------|--|
| 124161W |  |
| 124161B |  |

| LIGHT COLOUR             | LUMEN   CRI   | CODE |
|--------------------------|---------------|------|
| 2700K                    | 490/660   >90 | 3    |
| 3000K                    | 530/710   >90 | 5    |
| 1800-2850K   16V 330/450 | >95           | 9    |

## ALWAYS USE

power supply | 500mA

| CODE     |          |
|----------|----------|
| 10W      | 90214405 |
| 15W dim  | 90224501 |
| 20W DALI | 90244602 |

350mA power supplies on page 694

## 1.0 PAR16

PAR16 max.35W | GU10  
100-240VAC | 50-60Hz  
aluminium | steel powder coated

1.10kg IP20 36° 355° 90 4-33

146-148 85° 355° 90 4-33

| CODE     |  |
|----------|--|
| 124120W0 |  |
| 124120B0 |  |

## OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

| CODE       |          |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701











PRIVATE RESIDENCE | BAUBUREAU OG 27 | LINEAR 54 SWITZERLAND



available from summer 2020

# BLIEK SQUARE

CEILING RECESSED



## 1.0 LED

LED 7/10W | 350/500mA | 18V  
COB 3-step | excl. power supply  
aluminium powder coated

0.47kg | IP20 | 36°

111x111mm | 60° | 355° | 75mm | 4-30mm

|  | CODE     |
|--|----------|
|  | 125261W_ |
|  | 125261B_ |

| LIGHT COLOUR | LUMEN       | CRI | CODE |
|--------------|-------------|-----|------|
| 2700K        | 540/740     | >90 | 3    |
| 3000K        | 490/790     | >90 | 5    |
| 4000K        | 630/840     | >90 | 6    |
| 1800-2850K   | 16V 300/410 | >95 | 9    |

## ALWAYS USE

power supply | 500mA

|          | CODE     |
|----------|----------|
| 10W      | 90214405 |
| 15W dim  | 90224501 |
| 20W DALI | 90244602 |

more power supplies on page 695

## 1.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated

0.45kg | IP20 | 36°

111x111mm | 60° | 355° | 75mm | 4-30mm

|  | CODE     |
|--|----------|
|  | 125220W0 |
|  | 125220B0 |

| LIGHT COLOUR | LUMEN       | CRI | CODE |
|--------------|-------------|-----|------|
| 2700K        | 540/740     | >90 | 3    |
| 3000K        | 490/790     | >90 | 5    |
| 4000K        | 630/840     | >90 | 6    |
| 1800-2850K   | 16V 300/410 | >95 | 9    |

## OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

|            | CODE     |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |


more lamps and specs on page 701

DIM THE LIGHTS

# IT CAN BE SO EASY

Never have your words and your touch been any more illuminating than with our new collection of ZigBee-compatible luminaires. All it takes to adjust and dim your lights is a simple swipe on your smartphone screen or a command to your voice-controlled device. Sounds easy? It is: Choose your favourite ZigBee products from our collection, connect them to your smart home system such as Amazon Echo Plus, Philips Hue or Homee and you're good to go. Whether you want bright lights for breakfast, candle light atmosphere for dinner, or anything in between – just kick up your feet and touch or talk to set your desired mood.

Noch nie war die Erleuchtung so einfach wie mit unserer ZigBee-kompatiblen Leuchtenkollektion – ein einfacher Klick oder eine Aufforderung an dein sprachgesteuertes Gerät genügen. Klingt einfach? Ist es auch: Lieblingsprodukte aus unserer ZigBee-Kollektion auswählen, mit dem Smart-Home-System wie Amazon Echo Plus, Philips Hue oder Homee verbinden und los geht's. Ob ein hell erleuchtetes Frühstück, schummrige Atmosphäre für ein Candle-Light-Dinner oder für alles dazwischen – zurücklehnen und die gewünschte Lichtstimmung genießen.

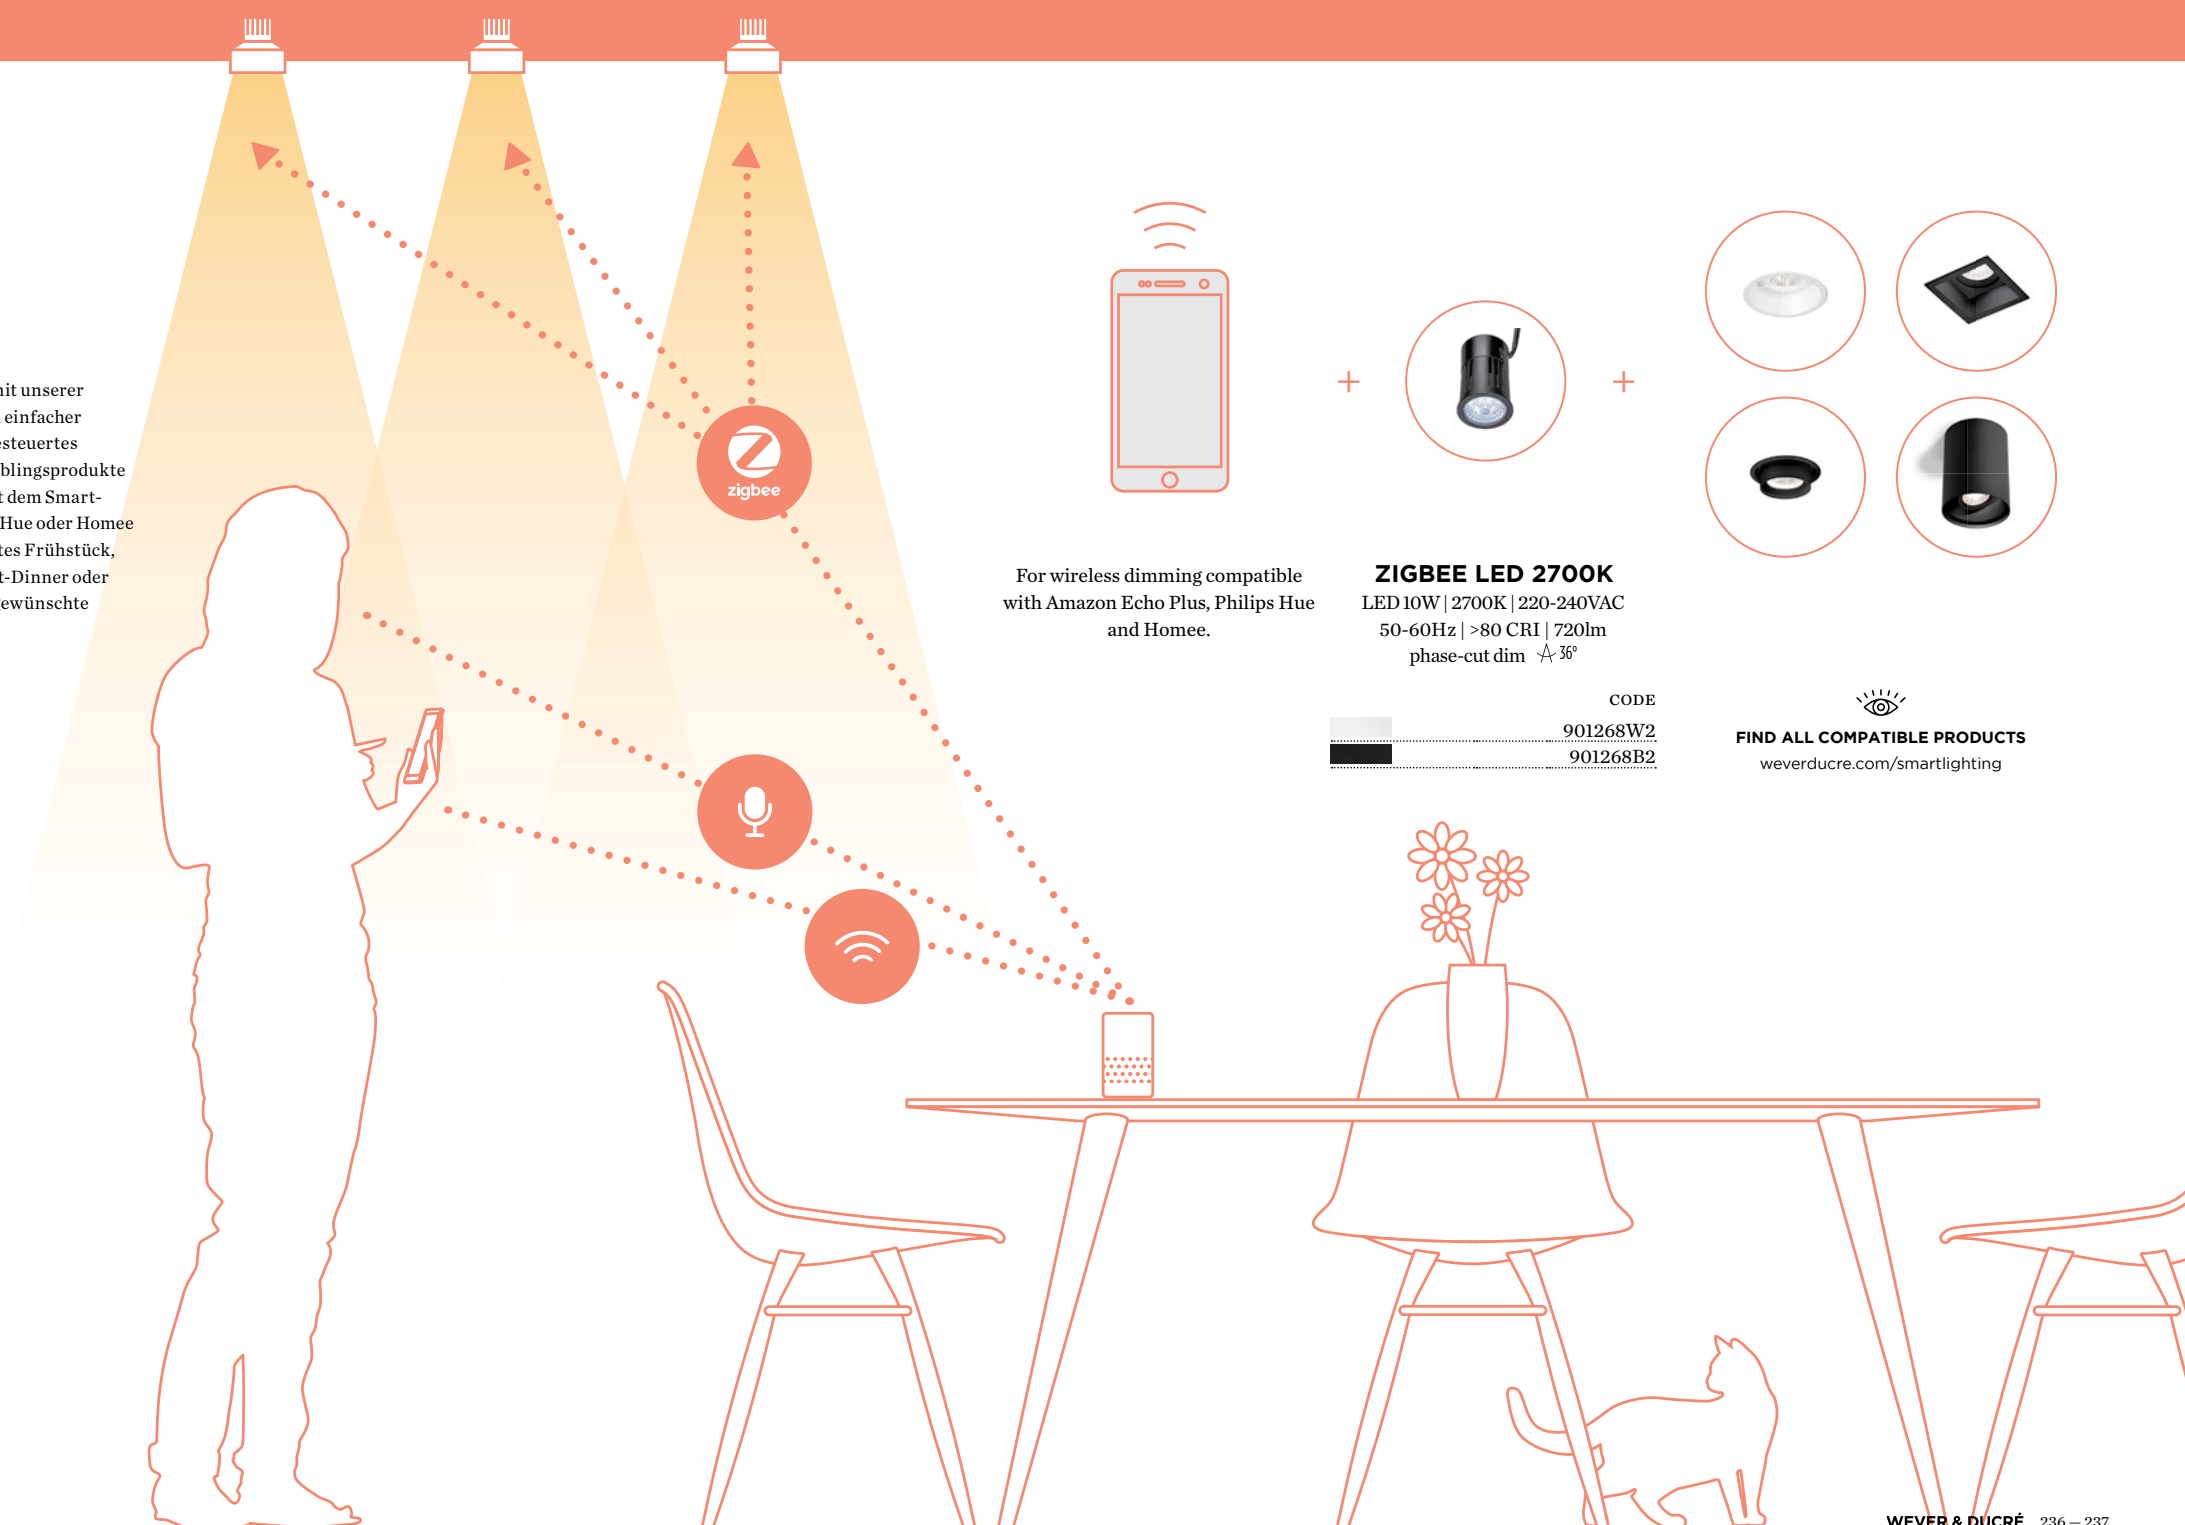


For wireless dimming compatible with Amazon Echo Plus, Philips Hue and Homee.

**ZIGBEE LED 2700K**  
LED 10W | 2700K | 220-240VAC  
50-60Hz | >80 CRI | 720lm  
phase-cut dim  $\Delta 36^\circ$

| CODE                                                                                |          |
|-------------------------------------------------------------------------------------|----------|
|  | 901268W2 |
|  | 901268B2 |


  
**FIND ALL COMPATIBLE PRODUCTS**  
[weverducre.com/smartlighting](https://weverducre.com/smartlighting)



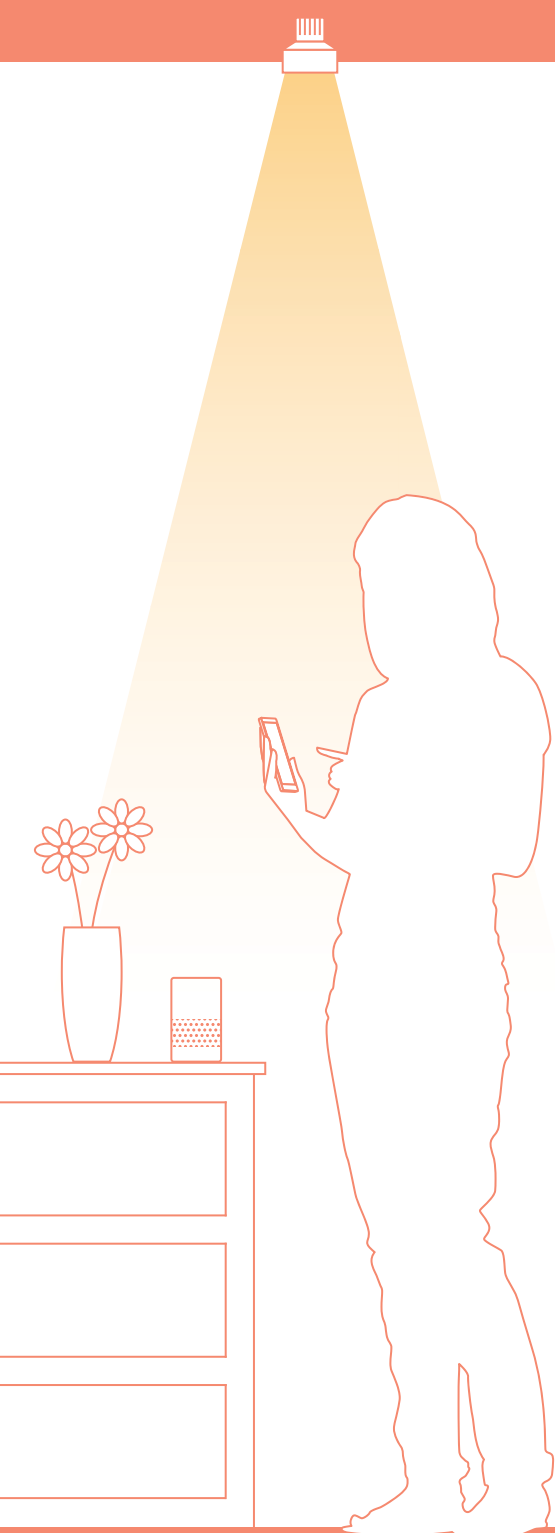

# SMART HOME LIGHTING

## CEILING RECESSED



### DEEP | 1.0 LED

LED 10W | 220-240VAC  
50-60Hz | phase-cut dim + ZigBee  
aluminium powder coated

0.31kg IP20 0.3° 36°

90


wire springs 76-79 4-27

| CODE |          |  |
|------|----------|--|
|      | 11216ZW_ |  |
|      | 11216ZS_ |  |
|      | 11216ZG_ |  |
|      | 11216ZB_ |  |

blade springs 76-79 min 10

| CODE |           |  |
|------|-----------|--|
|      | 11216ZW_C |  |
|      | 11216ZB_C |  |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 720   >80   | 2    |



### DEEP IP44 | 1.0 LED

LED 10W | 220-240VAC  
50-60Hz | phase-cut dim + ZigBee  
aluminium powder coated

0.32kg IP44 0.3° 36°

90


wire springs 86-89 4-25

| CODE |          |  |
|------|----------|--|
|      | 11266ZW_ |  |
|      | 11266ZB_ |  |

blade springs 86-89 min 8

| CODE |           |  |
|------|-----------|--|
|      | 11266ZW_C |  |
|      | 11266ZB_C |  |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 720   >80   | 2    |



### DEEPER | 1.0 LED

LED 10W | 220-240VAC  
50-60Hz | phase-cut dim + ZigBee  
aluminium powder coated


0.17kg IP20 0.3° 36°

95

wire springs 76-79 4-38

| CODE |          |  |
|------|----------|--|
|      | 15216ZW_ |  |
|      | 15216ZS_ |  |
|      | 15216ZG_ |  |
|      | 15216ZQ_ |  |
|      | 15216ZB_ |  |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 720   >80   | 2    |



### DEEPER IP44 | 1.0 LED

LED 10W | 220-240VAC  
50-60Hz | phase-cut dim + ZigBee  
aluminium powder coated  
clear glass cover


0.17kg IP44 0.3° 36°

95

wire springs 76-79 4-38

| CODE |          |  |
|------|----------|--|
|      | 15226ZW_ |  |
|      | 15226ZB_ |  |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 720   >80   | 2    |



### DEEP ADJUST | 1.0 LED

LED 10W | 220-240VAC  
50-60Hz | phase-cut dim + ZigBee  
aluminium powder coated

0.23kg IP20 0.3° 36°

35°/35° 355° 90


wire springs 86-89 4-23

| CODE |          |  |
|------|----------|--|
|      | 11236ZW_ |  |
|      | 11236ZS_ |  |
|      | 11236ZG_ |  |
|      | 11236ZQ_ |  |
|      | 11236ZB_ |  |

blade springs 89

| CODE |           |  |
|------|-----------|--|
|      | 11236ZW_C |  |
|      | 11236ZB_C |  |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 720   >80   | 2    |



### DEEP ADJUST | 2.0 LED

LED 10W | 220-240VAC  
50-60Hz | phase-cut dim + ZigBee  
aluminium powder coated


0.61kg IP20 0.3° 36°

35°/35° 355° 90

wire springs 87x176 4-23


| CODE |          |  |
|------|----------|--|
|      | 11276ZW_ |  |
|      | 11276ZB_ |  |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 720   >80   | 2    |

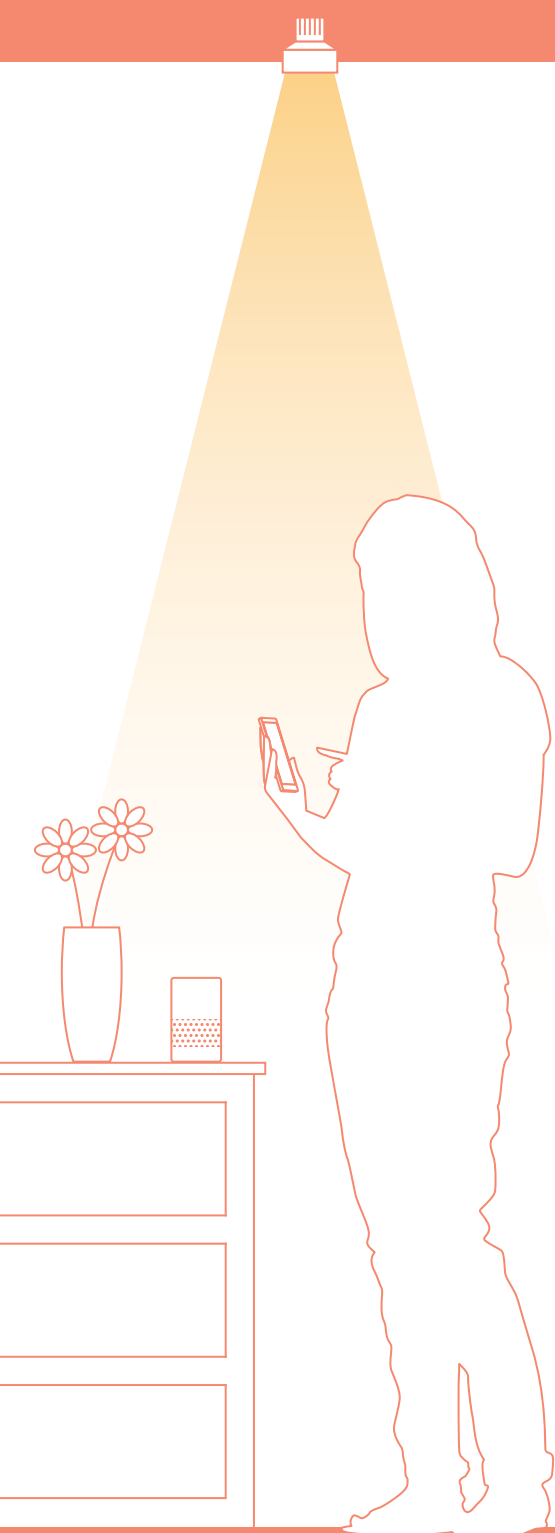

# SMART HOME LIGHTING

## CEILING RECESSED



### RON | 1.0 LED

**LED** LED 10W | 220-240VAC  
50-60Hz | phase-cut dim + ZigBee  
aluminium powder coated  
round cut-out for mounting

0.36kg IP20 0.3 36°

102-104 35°/35° 355° 90 4-25

|              |          |  |
|--------------|----------|--|
| wire springs |          |  |
|              | CODE     |  |
|              | 11116ZW_ |  |
|              | 11116ZB_ |  |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 720   >80   | 2    |

### PLANO | 1.0 LED

**LED** LED 10W | 220-240VAC  
50-60Hz | phase-cut dim + ZigBee  
aluminium powder coated

0.26kg IP20 0.3 36°


74x78 35°/35° 355° 95 2-18

|  |          |  |
|--|----------|--|
|  | CODE     |  |
|  | 11816ZW_ |  |
|  | 11816ZS_ |  |
|  | 11816ZG_ |  |
|  | 11816ZQ_ |  |
|  | 11816ZB_ |  |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 720   >80   | 2    |

### OPTIONAL

|            |          |
|------------|----------|
|            | CODE     |
| plasterkit | 90017104 |



### PLANO IP44 | 1.0 LED


**LED** LED 10W | 220-240VAC  
50-60Hz | phase-cut dim + ZigBee  
aluminium powder coated

0.21kg IP44 0.3 36°

74x78 90 4-30

|  |          |  |
|--|----------|--|
|  | CODE     |  |
|  | 11846ZW_ |  |
|  | 11846ZB_ |  |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 720   >80   | 2    |



### STRANGE | 1.0 LED



**LED** LED 10W | 220-240VAC  
50-60Hz | phase-cut dim + ZigBee  
aluminium powder coated

0.43kg IP20 0.3 36°

86x86 35°/35° 355° 95

|  |          |  |
|--|----------|--|
|  | CODE     |  |
|  | 13116ZW_ |  |
|  | 13116ZB_ |  |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 720   >80   | 2    |



### PYRAMID | 1.0 LED

**LED** LED 10W | 220-240VAC  
50-60Hz | phase-cut dim + ZigBee  
aluminium powder coated

0.28kg IP20 0.3 36°

102x102 35°/35° 355° 90 4-30

|  |          |  |
|--|----------|--|
|  | CODE     |  |
|  | 11316ZW_ |  |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 720   >80   | 2    |

### ALWAYS USE

plastic plasterkit 86x86 10 or 13

|  |          |
|--|----------|
|  | CODE     |
|  | 90017122 |
|  | 90017116 |

aluminium plasterkit 86x86 4-25

|  |          |
|--|----------|
|  | 90017120 |
|--|----------|



# THEY'RE FUN TO BATHE WITH

## SCARED OF WATER? NO WAY!

Keep knocking on the bathroom door if you want, IP44 luminaires won't be in a hurry to leave. Luminaires with this certification are protected against splashes. They're every bit as comfortable in a SPA as they are above a shower. Don't have much space? Then choose a version with a low installation depth. They fit well in rooms with low ceiling heights as well, making even the smallest hotel bathrooms shine. By the way, many types of IP44-luminaires are available, including spots. Wever & Ducré can order surface or surface-mounted luminaires with this protection class.

|                  |        |
|------------------|--------|
| DEEP IP44        | p. 245 |
| DEEPER IP44      | p. 247 |
| RINI IP44        | p. 251 |
| LUNA ROUND IP44  | p. 253 |
| RINI SNEAK IP44  | p. 255 |
| LUNA SQUARE IP44 | p. 257 |
| PLANO IP44       | p. 259 |
| MIRBI IP44       | p. 261 |

## WASSERSCHEU? VON WEGEN!



Eines ist sicher: Bei IP44-Leuchten kann man lange an die Badezimmertür klopfen – die kommen nicht raus. Schließlich sind Leuchten mit dieser Zertifizierung optimal vor Spritzwasser geschützt. Und fühlen sich daher im SPA-Bereich genau so wohl, wie über der Dusche. Sie haben nur wenig Platz? Dann sind Versionen mit geringer Einbautiefe die perfekte Lösung. Sie passen auch in Räume mit niedriger Raumhöhe und bringen so selbst das kleinste Hotelbadezimmer zum Strahlen. Übrigens: IP44-Leuchten sind natürlich nicht nur als Spots, sondern auch in vielen anderen Ausführungen erhältlich. So können bei Wever & Ducré auch Flächen- oder Aufbauleuchten mit dieser speziellen Schutzkennung geordert werden.

|                 |        |
|-----------------|--------|
| CITY IP44       | p. 263 |
| ROB IP44        | p. 323 |
| ROBY IP44       | p. 325 |
| TOWNA IP44      | p. 327 |
| LIGHTDROP IP44  | p. 557 |
| MIRBA IP44      | p. 559 |
| MIRBI LONG IP44 | p. 561 |





PRIVATE RESIDENCE | ARCHITECT REFUGE FRANCE



1.0 LED

LED 7/10W | 350/500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated

0.32kg | IP44 | 0.3° | 36°  
90

wire springs 86-89 4-25

| CODE     |  |
|----------|--|
| 112661W_ |  |
| 112661B_ |  |

blade springs 86-89 min 8

| CODE      |  |
|-----------|--|
| 112661W_C |  |
| 112661B_C |  |

| LIGHT COLOUR                   | LUMEN   CRI   | CODE |
|--------------------------------|---------------|------|
| 2700K                          | 480/640   >90 | 3    |
| 3000K                          | 510/690   >90 | 5    |
| 1800-2850K   16V 300/400   >95 |               | 9    |

ALWAYS USE

power supply | 500mA

| CODE     |          |
|----------|----------|
| 10W      | 90214405 |
| 15W dim  | 90224501 |
| 20W DALI | 90244602 |

350mA power supplies on page 694

1.0 MR16

QR-CBC51 max. 12W | GU5.3  
12V | excl. power supply  
aluminium powder coated

0.26kg | IP44 | 0.3° | 90

wire springs 86-89 4-25

| CODE     |  |
|----------|--|
| 112610W0 |  |
| 112610B0 |  |

blade springs 86-89 min 8

| CODE      |  |
|-----------|--|
| 112610W0C |  |
| 112610B0C |  |

ALWAYS USE

power supply | 12V

| CODE    |          |
|---------|----------|
| 10W dim | 90221401 |
| 25W dim | 90221701 |
| 10W dim | 90221904 |

more specs on page 699

1.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated

0.30kg | IP44 | 0.3° | 105

wire springs 86-89 4-25

| CODE     |  |
|----------|--|
| 112620W0 |  |
| 112620B0 |  |

blade springs 86-89 min 8

| CODE      |  |
|-----------|--|
| 112620W0C |  |
| 112620B0C |  |

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

| CODE       |          |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701




For wireless dimming compatible  
with Amazon Echo Plus, Philips Hue  
and Homee see page 239.





# DEEPER IP44

CEILING RECESSED



## 1.0 LED

LED 7/10W | 350/500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated

0.17kg | IP44 | 36°

95 | 76-79 | 4-38

| CODE |         |  |  |
|------|---------|--|--|
|      | 152261W |  |  |
|      | 152261B |  |  |

| LIGHT COLOUR     | LUMEN   CRI   | CODE |
|------------------|---------------|------|
| 2700K            | 440/600   >90 | 3    |
| 3000K            | 500/650   >90 | 5    |
| 1800-2850K   16V | 280/370   >95 | 9    |




For wireless dimming compatible  
with Amazon Echo Plus, Philips Hue  
and Homee see page 239.

## ALWAYS USE

power supply | 500mA

| CODE     |          |
|----------|----------|
| 10W      | 90214405 |
| 15W dim  | 90224501 |
| 20W DALI | 90244602 |

350mA power supplies on page 694



## 1.0 MR16

QR-CBC51 max. 12W | GU5.3  
12V | excl. power supply  
aluminium powder coated

0.11kg | IP44

100 | 4-30 | 76-79 | 4-38


| CODE     |  |
|----------|--|
| 152210W0 |  |
| 152210B0 |  |

## ALWAYS USE

power supply | 12V

| CODE    |          |
|---------|----------|
| 10W dim | 90221401 |
| 25W dim | 90221701 |
| 70W dim | 90221904 |

more specs on page 699



## 1.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated

0.15kg | IP44

115 | 4-30 | 76-79 | 4-38

| CODE     |  |
|----------|--|
| 152220W0 |  |
| 152220B0 |  |

## OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

| CODE       |          |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701









# RINI IP44

CEILING RECESSED



## 1.0 LED


 LED 7/10W | 350/500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated

 0.16 kg  IP44  0.3  36°


 76-79  60  4-25

| CODE                                                                                  |          |
|---------------------------------------------------------------------------------------|----------|
|  | 154161W_ |
|  | 154161B_ |

| LIGHT COLOUR                   | LUMEN   CRI   | CODE |
|--------------------------------|---------------|------|
| 2700K                          | 480/650   >90 | 3    |
| 3000K                          | 520/700   >90 | 5    |
| 1800-2850K   16V 300/400   >95 |               | 9    |



only for LED version



## 1.0 MR16

 QR-CBC51 max. 12W | GU5.3  
12V | excl. power supply  
aluminium powder coated

 0.10 kg  IP44  0.3 

 76-79  70  4-25


| CODE                                                                                  |          |
|---------------------------------------------------------------------------------------|----------|
|  | 154110W0 |
|  | 154110B0 |

## ALWAYS USE

power supply | 12V

| CODE    |          |
|---------|----------|
| 10W dim | 90221401 |
| 25W dim | 90221701 |
| 70W dim | 90221904 |

more specs on page 699



## 1.0 PAR16

 PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated

 0.14 kg  IP44  0.3 

 76-79  95  4-25


| CODE                                                                                  |          |
|---------------------------------------------------------------------------------------|----------|
|  | 154120W0 |
|  | 154120B0 |

## OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

| CODE       |          |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701




only for LED HV version



For wireless dimming compatible with Amazon Echo Plus, Philips Hue and Homee see [weverducre.com/smartlighting](https://weverducre.com/smartlighting)

# LUNA ROUND IP44

CEILING RECESSED



## 1.0 LED HV


LED 7W | 220-240VAC  
PCB 3-step | phase-cut dim  
aluminium | stainless steel  
opal PMMA cover | polyamide

0.18kg | IP44 | 8-15

76-79 | 50 | 8-15

|  | CODE    |
|--|---------|
|  | 114388W |
|  | 114388M |
|  | 114388B |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 350   | >90 | 5    |



## 1.0 LED

LED 7/10W | 350/500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium | stainless steel  
opal glass cover | polyamide

0.19kg | IP44 | 8-15

76-83 | 100 | min 4

|  | CODE    |
|--|---------|
|  | 114381W |
|  | 114381M |
|  | 114381B |

| LIGHT COLOUR | LUMEN       | CRI | CODE |
|--------------|-------------|-----|------|
| 2700K        | 350/510     | >90 | 3    |
| 3000K        | 410/550     | >90 | 5    |
| 1800-2850K   | 16V 230/320 | >95 | 9    |

## ALWAYS USE

power supply | 500mA

|          | CODE     |
|----------|----------|
| 10W      | 90214405 |
| 15W dim  | 90224501 |
| 20W DALI | 90244602 |

350mA power supplies on page 694

## OPTIONAL

|            | CODE     |
|------------|----------|
| plasterkit | 90017101 |



## 1.0 PAR16

PAR16 max. 10W | GU10  
100-240VAC | 50-60Hz  
aluminium | stainless steel  
opal glass cover | polyamide

0.24kg | IP44 | 8-15

76-83 | 120 | min 4

|  | CODE     |
|--|----------|
|  | 114120W0 |
|  | 114120M0 |
|  | 114120B0 |

| LIGHT COLOUR | LUMEN       | CRI | CODE |
|--------------|-------------|-----|------|
| 2700K        | 350/510     | >90 | 3    |
| 3000K        | 410/550     | >90 | 5    |
| 1800-2850K   | 16V 230/320 | >95 | 9    |

## OPTIONAL


PAR16 LED GU10 7W | phase-cut dim

|            | CODE     |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701

## OPTIONAL

|            | CODE     |
|------------|----------|
| plasterkit | 90017101 |



## 1.0 MR16

QR-CBC51 max.10W | GU5.3  
12V | excl. power supply  
aluminium | stainless steel  
opal glass cover | polyamide

0.28kg | IP44 | 8-15

76-83 | 100 | min 4

|  | CODE     |
|--|----------|
|  | 114110W0 |
|  | 114110M0 |
|  | 114110B0 |

| LIGHT COLOUR | LUMEN       | CRI | CODE |
|--------------|-------------|-----|------|
| 2700K        | 350/510     | >90 | 3    |
| 3000K        | 410/550     | >90 | 5    |
| 1800-2850K   | 16V 230/320 | >95 | 9    |

## ALWAYS USE

power supply | 12V


|         | CODE     |
|---------|----------|
| 10W dim | 90221401 |
| 25W dim | 90221701 |
| 70W dim | 90221904 |

more specs on page 699

## OPTIONAL

|            | CODE     |
|------------|----------|
| plasterkit | 90017101 |





#### 1.0 LED


 LED 7/10W | 350/500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated

 0.18 kg  IP44  36° 


 76-79  46  4-25

| CODE                                                                                  |          |
|---------------------------------------------------------------------------------------|----------|
|  | 154261W_ |
|  | 154261B_ |

| LIGHT COLOUR                   | LUMEN   CRI   | CODE |
|--------------------------------|---------------|------|
| 2700K                          | 470/630   >90 | 3    |
| 3000K                          | 500/680   >90 | 5    |
| 1800-2850K   16V 290/390   >95 |               | 9    |



only for LED version



#### 1.0 MR16

 QR-CBC51 max. 12W | GU5.3  
12V | excl. power supply  
aluminium powder coated

 0.12 kg  IP44  36° 

 76-79  55  4-25


| CODE                                                                                  |          |
|---------------------------------------------------------------------------------------|----------|
|  | 154210W0 |
|  | 154210B0 |

#### ALWAYS USE

power supply | 12V

| CODE    |          |
|---------|----------|
| 10W dim | 90221401 |
| 25W dim | 90221701 |
| 70W dim | 90221904 |

more specs on page 699



#### 1.0 PAR16

 PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated

 0.16 kg  IP44  36° 

 76-79  80  4-25

| CODE                                                                                  |          |
|---------------------------------------------------------------------------------------|----------|
|  | 154220W0 |
|  | 154220B0 |

#### OPTIONAL


PAR16 LED GU10 7W | phase-cut dim

| CODE       |          |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701



PRIVATE RESIDENCE OBUMEX – STEENOVEN BELGIUM



only for LED HV version



For wireless dimming compatible with Amazon Echo Plus, Philips Hue and Homee see [weverducre.com/smartlighting](https://weverducre.com/smartlighting)

1.0 LED HV

LED 7W | 220-240VAC  
PCB 3-step | phase-cut dim  
aluminium | stainless steel  
opal PMMA cover | polyamide

0.19kg | IP44 | 8-15

72x72 | 50

|  | CODE    |
|--|---------|
|  | 114488W |
|  | 114488M |
|  | 114488B |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 350   | >90 | 5    |

OPTIONAL

dimmer

|                        | CODE     |
|------------------------|----------|
| for switch             | 90019017 |
| for din rail           | 90019018 |
| more specs on page 699 |          |

1.0 LED

LED 7/10W | 350/500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium | stainless steel  
opal glass cover | polyamide

0.20kg | IP44 | 8-15

76x76 | 100

|  | CODE    |
|--|---------|
|  | 114481W |
|  | 114481M |
|  | 114481B |

| LIGHT COLOUR | LUMEN       | CRI | CODE |
|--------------|-------------|-----|------|
| 2700K        | 380/510     | >90 | 3    |
| 3000K        | 410/550     | >90 | 5    |
| 1800-2850K   | 16V 230/320 | >95 | 9    |

ALWAYS USE

power supply | 500mA

|          | CODE     |
|----------|----------|
| 10W      | 90214405 |
| 15W dim  | 90224501 |
| 20W DALI | 90244602 |




350mA power supplies on page 694

OPTIONAL

|            | CODE     |
|------------|----------|
| plasterkit | 90017101 |

LUNA SQUARE IP44

CEILING RECESSED



1.0 PAR16

PAR16 max. 10W | GU10  
100-240VAC | 50-60Hz  
aluminium | stainless steel  
opal glass cover | polyamide

0.26kg | IP44 | 8-15

76x76 | 120

|  | CODE     |
|--|----------|
|  | 114220W0 |
|  | 114220M0 |
|  | 114220B0 |

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

|            | CODE     |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701

|            | CODE     |
|------------|----------|
| plasterkit | 90017101 |

1.0 MR16

QR-CBC51 max. 10W | GU5.3  
12V | excl. power supply  
aluminium | stainless steel  
opal glass cover | polyamide

0.28kg | IP44 | 8-15

76x76 | 100

|  | CODE     |
|--|----------|
|  | 114210W0 |
|  | 114210M0 |
|  | 114210B0 |

ALWAYS USE

power supply | 12V

|         | CODE     |
|---------|----------|
| 10W dim | 90221401 |
| 25W dim | 90221701 |
| 70W dim | 90221904 |

more specs on page 699

OPTIONAL


|            | CODE     |
|------------|----------|
| plasterkit | 90017101 |





# PLANO IP44

CEILING RECESSED



## 1.0 LED

LED LED 7/10W | 350/500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated

0.21kg IP44 36°

74x78 90 4-30


| CODE    |  |
|---------|--|
| 118461W |  |
| 118461B |  |

| LIGHT COLOUR             | LUMEN   CRI | CODE |
|--------------------------|-------------|------|
| 2700K                    | 480   >90   | 3    |
| 3000K                    | 520   >90   | 5    |
| 1800-2850K   16V 300/390 | >95         | 9    |



For wireless dimming compatible  
with Amazon Echo Plus, Philips Hue  
and Homee see page 241.

available from spring 2020



## 1.0 MR16

QR-CBC51 max. 35W | GU5.3  
12V | excl. power supply  
aluminium powder coated

0.15kg IP44

74x78 115 4-30


| CODE     |  |
|----------|--|
| 118410W0 |  |
| 118410B0 |  |

## ALWAYS USE

power supply | 12V

| CODE    |          |
|---------|----------|
| 10W dim | 90221401 |
| 25W dim | 90221701 |
| 70W dim | 90221904 |

more specs on page 699



## 1.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated

0.19kg IP44

74x78 115 4-30

| CODE     |  |
|----------|--|
| 118420W0 |  |
| 118420B0 |  |

## ALWAYS USE

PAR16 LED GU10 7W | phase-cut dim

| CODE       |          |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701





# MIRBI IP44

CEILING RECESSED



p. 329 p. 561



## 1.0

LED 7W | 220-240VAC  
PCB 3-step | phase-cut dim  
clear + opal PMMA cover

0.24kg IP44 0.3 76-79 50 8-15

## 2.0

LED 7W | 220-240VAC  
PCB 3-step | phase-cut dim  
clear + opal PMMA cover

0.26kg IP44 0.3 72x72 50 2-25

| CODE |  |  |         |
|------|--|--|---------|
|      |  |  | 1145880 |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 440   >90   | 5    |

## OPTIONAL

dimmer

| CODE         |          |
|--------------|----------|
| for switch   | 90019017 |
| for din rail | 90019018 |

more specs on page 699

| CODE |  |  |         |
|------|--|--|---------|
|      |  |  | 1146880 |


| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 440   >90   | 5    |

## OPTIONAL

dimmer

| CODE         |          |
|--------------|----------|
| for switch   | 90019017 |
| for din rail | 90019018 |

more specs on page 699








# CITY IP44

CEILING RECESSED




## 1.6

LED 13W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim | aluminium  
powder coated | opal PMMA cover

0.64 kg IP44

202-205 50 4-22




## 2.6

LED 18W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim | aluminium  
powder coated | opal PMMA cover

1.05 kg IP44

297-300 50 4-22




## 3.5

LED 32W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim | aluminium  
powder coated | opal PMMA cover

1.70 kg IP44

387-390 50 4-22



| CODE         |          |          |
|--------------|----------|----------|
|              | 115184W_ |          |
| LIGHT COLOUR | LUMEN    | CRI CODE |
| 2700K        | 770      | >90 3    |
| 3000K        | 840      | >90 5    |

| CODE         |          |          |
|--------------|----------|----------|
|              | 115284W_ |          |
| LIGHT COLOUR | LUMEN    | CRI CODE |
| 2700K        | 1160     | >90 3    |
| 3000K        | 1260     | >90 5    |

| CODE         |          |          |
|--------------|----------|----------|
|              | 115384W_ |          |
| LIGHT COLOUR | LUMEN    | CRI CODE |
| 2700K        | 1730     | >90 3    |
| 3000K        | 1850     | >90 5    |

## CEILING SURFACE SPOTLIGHTS



**RAY**  
p. 267



**BOX MINI**  
p. 271



**BOX**  
p. 275



**DOCUS**  
p. 281



**HEXO**  
p. 285



**PIRRO 4.1**  
p. 291



**PIRRO 4.0**  
p. 293



**SOLID PETIT 1.0**  
p. 295



**SOLID PETIT 2.0**  
p. 295



**SOLID**  
p. 299



**SIRRA**  
p. 303



**SIRRO**  
p. 305



**SARA ON BASE**  
p. 309



**SQUBE ON BASE**  
p. 311



**CENO**  
p. 317



**MICK**  
p. 319

## CEILING SURFACE IP-RATED



**ROB IP44**  
p. 323



**ROBY IP44**  
p. 325



**TOWNA IP44**  
p. 327



**MIRBI IP44 1.0**  
p. 329




**MIRBI IP44 2.0**  
p. 329

## CEILING SURFACE LUMINAIRES



**BEBOW**  
p. 331



**VENN**  
p. 335

## DESIGNER FAMILIES



**ROOMOR  
CEILING 1.0**  
p. 33



**MIRRO  
CEILING**  
p. 53



**DRO  
CEILING**  
p. 65



**J.J.W.  
SURFACE**  
p. 151

# CEILING SURFACE

p. 267 — 335





HOTEL MÜHLE | ARCHITECT DI RAINER SCHÖPF OBERGURGL | AUSTRIA






OPTIONAL

single inner cover max. 10W  
aluminium powder coated brushed

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 911041W1 |
|  | 911041G1 |
|  | 911041B1 |

RAY  
CEILING SURFACE



1.0 LED

LED 8W | 220-240VAC  
50-60Hz | COB 3-step  
aluminium powder coated  
brushed



1.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
brushed



phase-cut dim

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|    | 146764W_ |
|    | 146764L_ |
|    | 146764G_ |
|    | 146764Q_ |
|   | 146764P_ |
|  | 146764B_ |

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|    | 146720W0 |
|    | 146720L0 |
|    | 146720G0 |
|    | 146720Q0 |
|   | 146720P0 |
|  | 146720B0 |

DALI dim

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 146765W_ |
|  | 146765L_ |
|  | 146765G_ |
|  | 146765Q_ |
|  | 146765P_ |
|  | 146765B_ |

| LIGHT COLOUR                                | LUMEN   CRI | CODE |
|---------------------------------------------|-------------|------|
| 2700K                                       | 580   >80   | 2    |
| 3000K                                       | 610   >80   | 4    |
| 1800-2850K                                  | 390   >95   | 9    |
| 1800-2850K available only for phase-cut dim |             |      |

OPTIONAL

| PAR16 LED GU10 7W   phase-cut dim |          |
|-----------------------------------|----------|
|                                   | CODE     |
| 2700K                             | 901228W2 |
| 3000K                             | 901228W4 |
| 1800-2850K                        | 901229S9 |
| more lamps and specs on page 701  |          |








# BOX MINI

CEILING SURFACE



p. 503



## 1.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.16kg IP20 0.3

| CODE     |  |
|----------|--|
| 258120W0 |  |
| 258120G0 |  |
| 258120Q0 |  |
| 258120B0 |  |

## OPTIONAL

PAR16 LED GU10 7W | phase-cut dim  
CODE

|            |          |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701

MIX AND MATCH

# THE MAGIC CUBE

Remember that small magic cube we couldn't put down in the 80s? Then you will love BOX. It has an almost infinite number of variations for you to try - not just in terms of colour. BOX is incredibly flexible when it comes to insets and lamps. Grab a double espresso and start combining. Not really into cubes? Then try taking a fantastic HEXO, DOCUS, or RAY luminaire home with you. Use our online configurator to put it together exactly how you like it.

Können Sie sich noch an den magischen kleinen Würfel erinnern, den wir in den 80ern einfach nicht aus der Hand legen konnten? Dann werden Sie BOX lieben. Denn auch mit ihr lassen sich nahezu unendlich viele Varianten durchprobieren. Und das nicht nur in puncto Farben. Auch bei Insets und Leuchtmitteln ist BOX mehr als nur flexibel. Also einfach einen doppelten Espresso schnappen und loskombinieren. Würfel sind nicht so Ihr Ding? Dann können Sie sich mit HEXO, DOCUS oder RAY auch andere tolle Leuchtenformen dieser Serie nach Hause holen. Und sie sich mit unserem Online-Konfigurator gleich selbst zusammenstellen.

SHADE COLOUR



INNER REFLECTOR COLOUR



INNER COVER COLOUR



HAVE A LOOK

[weverducre.com/universalstars](https://weverducre.com/universalstars)



BLACK  
INNER COVER




WITHOUT  
INSETS



GOLD  
INNER COVER



WHITE  
INNER REFLECTOR



BLACK  
INNER REFLECTOR



GOLD  
INNER REFLECTOR





inner  
reflector



inner  
cover

## OPTIONAL

single inner reflector max. 10W  
wet painted polycarbonate

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 911211W1 |
|  | 911211G1 |
|  | 911211B1 |

single inner cover max. 10W  
aluminium powder coated brushed

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 911011W1 |
|  | 911011G1 |
|  | 911011B1 |

# BOX

## CEILING SURFACE



p. 393





p. 505



p. 579



p. 607



## 1.0 LED

 LED 8W | 220-240VAC  
50-60Hz | COB 3-step  
aluminium powder coated  
brushed

  0.74kg  IP20  32°

## 1.0 PAR16

 PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
brushed

  0.66kg  IP20  32°

## phase-cut dim

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|    | 146164W_ |
|    | 146164L_ |
|    | 146164G_ |
|    | 146164Q_ |
|   | 146164P_ |
|  | 146164B_ |

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|    | 146120W0 |
|    | 146120L0 |
|    | 146120G0 |
|    | 146120Q0 |
|   | 146120P0 |
|  | 146120B0 |

## DALI dim

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 146165W_ |
|  | 146165L_ |
|  | 146165G_ |
|  | 146165Q_ |
|  | 146165P_ |
|  | 146165B_ |

| LIGHT COLOUR                                   | LUMEN   CRI | CODE |
|------------------------------------------------|-------------|------|
| 2700K                                          | 580   >80   | 2    |
| 3000K                                          | 610   >80   | 4    |
| 1800-2850K                                     | 390   >95   | 9    |
| 1800-2850K available only for<br>phase-cut dim |             |      |

## OPTIONAL

|                                  | PAR16 LED GU10 7W   phase-cut dim |
|----------------------------------|-----------------------------------|
|                                  | CODE                              |
| 2700K                            | 901228W2                          |
| 3000K                            | 901228W4                          |
| 1800-2850K                       | 901229S9                          |
| more lamps and specs on page 701 |                                   |










PRIVATE RESIDENCE BELGIUM





OPTIONAL

double inner reflector max. 10W  
wet painted polycarbonate

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 911251W1 |
|  | 911251G1 |
|  | 911251B1 |

single inner cover max. 10W  
aluminium powder coated brushed  
2 pieces needed

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 911011W1 |
|  | 911011G1 |
|  | 911011B1 |

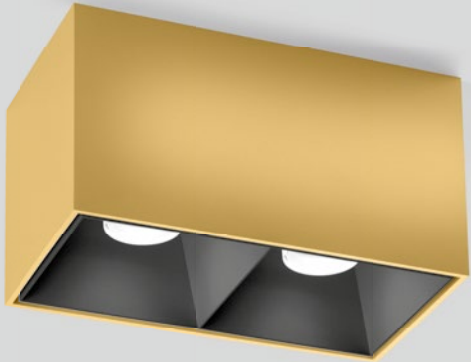


2.0 LED

LED 2x LED 8W | 220-240VAC  
50-60Hz | COB 3-step  
aluminium powder coated  
brushed | phase-cut dim

  1.08kg  IP20  32°

|                                                                                       | CODE    |
|---------------------------------------------------------------------------------------|---------|
|  | 146264W |
|  | 146264L |
|  | 146264G |
|  | 146264Q |
|  | 146264P |
|  | 146264B |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 2x580   >80 | 2    |
| 3000K        | 2x610   >80 | 4    |
| 1800-2850K   | 2x390   >95 | 9    |



2.0 PAR16

PAR16 2x PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
brushed

  1.13kg  IP20  32°

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 146220W0 |
|  | 146220L0 |
|  | 146220G0 |
|  | 146220Q0 |
|  | 146220P0 |
|  | 146220B0 |

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

|            | CODE     |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701

BOX  
CEILING SURFACE



inner  
cover

### OPTIONAL

single inner cover max. 10W  
aluminium powder coated brushed


|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 911021W1 |
|  | 911021G1 |
|  | 911021B1 |

# DOCUS

## CEILING SURFACE



p. 395



### 1.0 LED

 LED 8W | 220-240VAC  
50-60Hz | COB 3-step  
aluminium powder coated  
brushed

  0.63kg  IP20   $\approx 0.3^\circ$    $\approx 32^\circ$


phase-cut dim

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|    | 146364W_ |
|    | 146364L_ |
|   | 146364G_ |
|  | 146364P_ |
|  | 146364B_ |

DALI dim

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 146365W_ |
|  | 146365L_ |
|  | 146365G_ |
|  | 146365P_ |
|  | 146365B_ |

| LIGHT COLOUR                                | LUMEN   CRI | CODE |
|---------------------------------------------|-------------|------|
| 2700K                                       | 580   >80   | 2    |
| 3000K                                       | 610   >80   | 4    |
| 1800-2850K                                  | 390   >95   | 9    |
| 1800-2850K available only for phase-cut dim |             |      |



### 1.0 PAR16

 PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
brushed

  0.55kg  IP20   $\approx 0.3^\circ$

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|    | 146320W0 |
|    | 146320L0 |
|   | 146320G0 |
|  | 146320P0 |
|  | 146320B0 |

### OPTIONAL

| PAR16 LED GU10 7W   phase-cut dim | CODE     |
|-----------------------------------|----------|
| 2700K                             | 901228W2 |
| 3000K                             | 901228W4 |
| 1800-2850K                        | 901229S9 |
| more lamps and specs on page 701  |          |






OPTIONAL

single inner cover max. 10W  
aluminium powder coated brushed  
2 pieces needed

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 911021W1 |
|  | 911021G1 |
|  | 911021B1 |




2.0 LED

 2x LED 8W | 220-240VAC  
50-60Hz | COB 3-step  
aluminium powder coated  
brushed | phase-cut dim

 0.92kg  IP20  0.3°  P  A 32°

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 146464W_ |
|  | 146464L_ |
|  | 146464G_ |
|  | 146464P_ |
|  | 146464B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 2x580 | >80 | 2    |
| 3000K        | 2x610 | >80 | 4    |
| 1800-2850K   | 2x390 | >95 | 9    |



2.0 PAR16

 2x PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
brushed

 1.01kg  IP20  0.3°

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 146420W0 |
|  | 146420L0 |
|  | 146420G0 |
|  | 146420P0 |
|  | 146420B0 |

OPTIONAL



PAR16 LED GU10 7W | phase-cut dim  
CODE

|            |          |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701

DOCUS

CEILING SURFACE



p. 367  
p. 377

p. 397  
p. 377

### 1.0 LED

LED 8W | 220-240VAC  
50-60Hz | COB 3-step  
aluminium powder coated  
brushed

0.72kg | IP20 |  $\approx 0.3 \times D$  |  $\approx 32^\circ$

### 1.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.63kg | IP20 |  $\approx 0.3 \times D$

phase-cut dim

|  | CODE    |
|--|---------|
|  | 146564W |
|  | 146564G |
|  | 146564Q |
|  | 146564P |
|  | 146564B |

|  | CODE     |
|--|----------|
|  | 146520W0 |
|  | 146520G0 |
|  | 146520Q0 |
|  | 146520P0 |
|  | 146520B0 |

DALI dim

|  | CODE    |
|--|---------|
|  | 146565W |
|  | 146565G |
|  | 146565Q |
|  | 146565P |
|  | 146565B |



### OPTIONAL

single inner cover max. 10W  
aluminium powder coated brushed

|  | CODE     |
|--|----------|
|  | 911031W1 |
|  | 911031G1 |
|  | 911031B1 |

| LIGHT COLOUR                                | LUMEN   CRI | CODE |
|---------------------------------------------|-------------|------|
| 2700K                                       | 580   >80   | 2    |
| 3000K                                       | 610   >80   | 4    |
| 1800-2850K                                  | 390   >95   | 9    |
| 1800-2850K available only for phase-cut dim |             |      |

### OPTIONAL

| PAR16 LED GU10 7W   phase-cut dim |          |
|-----------------------------------|----------|
|                                   | CODE     |
| 2700K                             | 901228W2 |
| 3000K                             | 901228W4 |
| 1800-2850K                        | 901229S9 |
| more lamps and specs on page 701  |          |






OPTIONAL

single inner cover max. 10W  
aluminium powder coated brushed  
2 pieces needed

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 911031W1 |
|  | 911031G1 |
|  | 911031B1 |



2.0 LED


 2x LED 8W | 220-240VAC  
50-60Hz | COB 3-step  
aluminium powder coated  
brushed

 1.13kg  IP20  0.3m  32°

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 146664W_ |
|  | 146664G_ |
|  | 146664Q_ |
|  | 146664P_ |
|  | 146664B_ |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 2x580   >80 | 2    |
| 3000K        | 2x610   >80 | 4    |
| 1800-2850K   | 2x390   >95 | 9    |

HEXO  
CEILING SURFACE



2.0 PAR16

 2x PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
brushed

 1.19kg  IP20  0.3m

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 146620W0 |
|  | 146620G0 |
|  | 146620Q0 |
|  | 146620P0 |
|  | 146620B0 |

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

|            | CODE     |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701









available from summer 2020





# PIRRO

CEILING SURFACE




p. 195




E



J



K



B

## 1.0

LED 4.5W | 220-240VAC  
50-60Hz | COB 3-step | incl. PS  
phase-cut dim aluminium  
powder coated | PC lens and  
reflector

0.20kg IP20 0.3° 32°

| CODE     |  |  |  |
|----------|--|--|--|
| 151151E_ |  |  |  |
| 151151J_ |  |  |  |
| 151151K_ |  |  |  |
| 151151B_ |  |  |  |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 380   >90   | 3    |
| 3000K        | 405   >90   | 5    |

## 4.1

4x LED 4.5W | 220-240VAC  
50-60Hz | COB 3-step | incl. PS  
phase-cut dim | aluminium  
powder coated | PC lens and  
reflector

0.50kg IP20 0.3° 32°

| CODE     |  |  |  |
|----------|--|--|--|
| 151461E_ |  |  |  |
| 151461J_ |  |  |  |
| 151461K_ |  |  |  |
| 151461B_ |  |  |  |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 4x380   >90 | 3    |
| 3000K        | 4x405   >90 | 5    |



PRIVATE RESIDENCE GERMANY



# PIRRO

## CEILING SURFACE




p. 195




E



J




K



B

available from summer 2020




### 2.0

LED 2x LED 4.5W | 220-240VAC  
50-60Hz | COB 3-step | incl. PS  
phase-cut dim | aluminium  
powder coated | PC reflector

0.30kg IP20 32°

| CODE |  |          |  |
|------|--|----------|--|
|      |  | 151251E_ |  |
|      |  | 151251J_ |  |
|      |  | 151251K_ |  |
|      |  | 151251B_ |  |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 2x380   >90 | 3    |
| 3000K        | 2x405   >90 | 5    |




### 4.0

LED 4x LED 4.5W | 220-240VAC  
50-60Hz | COB 3-step | incl. PS  
phase-cut dim | aluminium  
powder coated | PC reflector

0.48kg IP20 32°

| CODE |  |          |  |
|------|--|----------|--|
|      |  | 151451E_ |  |
|      |  | 151451J_ |  |
|      |  | 151451K_ |  |
|      |  | 151451B_ |  |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 4x380   >90 | 3    |
| 3000K        | 4x405   >90 | 5    |



### 6.0

LED 6x LED 4.5W | 220-240VAC  
50-60Hz | COB 3-step | incl. PS  
phase-cut dim | aluminium  
powder coated | PC reflector

0.80kg IP20 32°

| CODE |  |          |  |
|------|--|----------|--|
|      |  | 151651E_ |  |
|      |  | 151651J_ |  |
|      |  | 151651K_ |  |
|      |  | 151651B_ |  |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 6x380   >90 | 3    |
| 3000K        | 6x405   >90 | 5    |







available from summer 2020

# SOLID petit

CEILING SURFACE



## 1.0 LED

LED 4.5W | 220-240V | 50-60Hz  
incl. PS | phase-cut dim  
aluminium powder coated

0.32kg IP20 0.3° 32°

| CODE |         |  |  |
|------|---------|--|--|
|      | 133564W |  |  |
|      | 133564J |  |  |
|      | 133564K |  |  |
|      | 133564B |  |  |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 335   | >90 | 3    |
| 3000K        | 350   | >90 | 5    |

## 2.0 LED

LED 6W | 220-260V | 50-60Hz  
incl. PS | phase-cut dim  
aluminium powder coated

0.42kg IP20 0.3° 34°

25°/25° 355°

| CODE |         |  |  |
|------|---------|--|--|
|      | 133464W |  |  |
|      | 133464J |  |  |
|      | 133464K |  |  |
|      | 133464B |  |  |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 540   | >90 | 3    |
| 3000K        | 570   | >90 | 5    |
| 1800-2700K   | 360   | >95 | 9    |








W



J




K



P





Q



B

# SOLID

## CEILING SURFACE



### 1.0 LED

LED 10W | 220-240VAC  
50-60Hz | COB 3-step | incl. PS  
aluminium powder coated

0.65kg IP20 0.3-1° 36°

25°/25° 355°

phase-cut dim

| CODE     |
|----------|
| 133264W_ |
| 133264J_ |
| 133264K_ |
| 133264P_ |
| 133264Q_ |
| 133264B_ |

DALI dim

| CODE     |
|----------|
| 133365W_ |
| 133365J_ |
| 133365K_ |
| 133365P_ |
| 133365Q_ |
| 133365B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 710   | >90 | 3    |
| 3000K        | 770   | >90 | 5    |
| 1800-2850K   | 410   | >95 | 9    |

### 1.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated

0.61kg IP20 0.3-1°

25°/25° 355°

| CODE     |
|----------|
| 133120W0 |
| 133120J0 |
| 133120K0 |
| 133120P0 |
| 133120Q0 |
| 133120B0 |

### OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

| CODE     |
|----------|
| 901228W2 |
| 901228W4 |
| 901229S9 |

more lamps and specs on page 701










PRIVATE RESIDENCE BELGIUM



1.0 LED

LED 10W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed


0.86kg IP20 36°

35°/35° 355°

|  | CODE    |
|--|---------|
|  | 134164W |
|  | 134164E |
|  | 134164B |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 710   >90   | 3    |
| 3000K        | 770   >90   | 5    |
| 1800-2850K   | 440   >95   | 9    |

SIRRA  
CEILING SURFACE



1.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.74kg IP20 36°

35°/35° 355°

|  | CODE     |
|--|----------|
|  | 134120W0 |
|  | 134120E0 |
|  | 134120B0 |

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

|            | CODE     |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |


more lamps and specs on page 701



FAIR BOOTH | BIS BEURS | GINO VANHOUTTE GENT | BELGIUM

# SIRRO

CEILING SURFACE



## 1.0 LED


LED 10W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.85kg IP20 0.3° 36°

35°/35° 355°

| CODE    |  |
|---------|--|
| 139164W |  |
| 139164E |  |
| 139164B |  |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 710   >90   | 3    |
| 3000K        | 770   >90   | 5    |
| 1800-2850K   | 440   >95   | 9    |



## 1.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.81kg IP20 0.3°

35°/35° 355°

| CODE     |  |
|----------|--|
| 139120W0 |  |
| 139120E0 |  |
| 139120B0 |  |


## OPTIONAL

PAR16 LED GU10 7W | phase-cut dim  
CODE

|            |          |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701





2.0 LED


2x LED 10W | 220-240VAC  
50-60Hz | COB 3-step  
incl. PS | phase-cut dim  
aluminium powder coated  
brushed

1.57kg IP20 35°/35° 355°

35°/35° 355°

|  | CODE    |
|--|---------|
|  | 139264W |
|  | 139264E |
|  | 139264B |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 2x710 | >90 | 3    |
| 3000K        | 2x770 | >90 | 5    |
| 1800-2850K   | 2x440 | >95 | 9    |



3.0 LED


3x LED 10W | 220-240VAC  
50-60Hz | COB 3-step  
incl. PS | phase-cut dim  
aluminium powder coated  
brushed

2.21kg IP20 35°/35° 355°

35°/35° 355°

|  | CODE    |
|--|---------|
|  | 139364W |
|  | 139364E |
|  | 139364B |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 3x710 | >90 | 3    |
| 3000K        | 3x770 | >90 | 5    |
| 1800-2850K   | 3x440 | >95 | 9    |



2.0 PAR16

2x PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
brushed

1.51kg IP20 35°/35° 355°

35°/35° 355°


|  | CODE     |
|--|----------|
|  | 139220W0 |
|  | 139220E0 |
|  | 139220B0 |

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

|            | CODE     |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701



3.0 PAR16

3x PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
brushed

1.51kg IP20 35°/35° 355°

35°/35° 355°

|  | CODE     |
|--|----------|
|  | 139320W0 |
|  | 139320E0 |
|  | 139320B0 |




OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

|            | CODE     |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701





# SARA on base

## CEILING SURFACE



### 1.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | aluminium  
powder coated

0.23kg IP20  $\pm 0.3^\circ$

90°

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 157220W0 |
|  | 157220G0 |
|  | 157220B0 |
|  | 157220K0 |

### OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

|            | CODE     |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701

### 1.1 PAR16

PAR16 max. 12W | GU10  
100-240VAC | aluminium  
powder coated

0.32kg IP20  $\pm 0.3^\circ$

90° 330°

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 157420W0 |
|  | 157420B0 |
|  | 157420K0 |

### OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

|            | CODE     |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701

### 3.0 PAR16

3x PAR16 max. 12W | GU10  
100-240VAC | aluminium  
powder coated

0.74kg IP20  $\pm 0.3^\circ$

90° 330°

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 157520W0 |
|  | 157520B0 |
|  | 157520K0 |

### OPTIONAL

PAR16 LED GU10 7W | phase-cut dim


|            | CODE     |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701





OFFICE BOARDROOM GREENHOUSE | INTERVEST ANTWERPEN | BELGIUM



1.0 LED

LED 6W | 220-240VAC | 50-60Hz  
COB 3-step | phase-cut dim  
aluminium powder coated

0.43kg IP20 39°

90°

| CODE |         |  |  |
|------|---------|--|--|
|      | 144264W |  |  |
|      | 144264B |  |  |


| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 415   | >80 | 2    |
| 3000K        | 380   | >80 | 4    |
| 1800-3000K   | 350   | >80 | 9    |

OPTIONAL

dimmer

| CODE         |          |
|--------------|----------|
| for switch   | 90019017 |
| for din rail | 90019018 |

more specs on page 699



2.0 LED

LED 12W | 220-240VAC | 50-60Hz  
COB 3-step | phase-cut dim  
aluminium powder coated

0.44kg IP20 32°

90°

| CODE |         |  |  |
|------|---------|--|--|
|      | 144464W |  |  |
|      | 144464B |  |  |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 711   | >80 | 2    |
| 3000K        | 810   | >80 | 4    |
| 1800-3000K   | 850   | >80 | 9    |

OPTIONAL

dimmer


| CODE         |          |
|--------------|----------|
| for switch   | 90019017 |
| for din rail | 90019018 |

more specs on page 699

CEILING SURFACE



p. 363  
p. 371



1.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated

0.43kg IP20 32°

90°

| CODE |          |  |  |
|------|----------|--|--|
|      | 144220W0 |  |  |
|      | 144220B0 |  |  |


| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 711   | >80 | 2    |
| 3000K        | 810   | >80 | 4    |
| 1800-3000K   | 850   | >80 | 9    |

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

| CODE       |          |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701

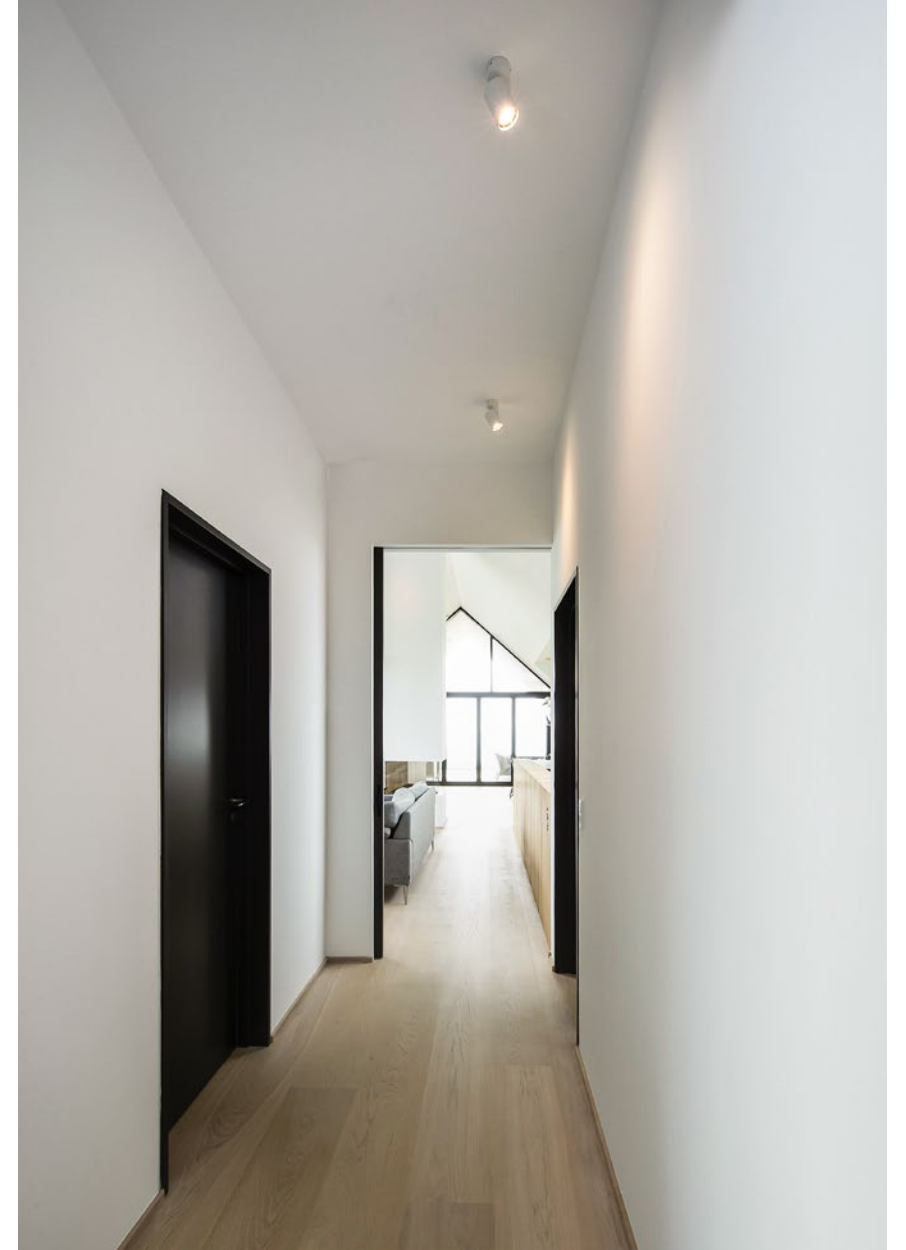






# SQUBE on base

CEILING SURFACE



### #2 PAR16

2x PAR16 max. 12W | GU10  
100-240VAC  
aluminium powder coated

0.58kg IP20 0.3°

90° 355°


|  | CODE     |
|--|----------|
|  | 144520W0 |
|  | 144520B0 |

### OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

|            | CODE     |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701



### #3 PAR16

3x PAR16 max. 12W | GU10  
100-240VAC  
aluminium powder coated

0.93kg IP20 0.3°

90° 355°

|  | CODE     |
|--|----------|
|  | 144620W0 |
|  | 144620B0 |

### OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

|            | CODE     |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701




PRIVATE RESIDENCE GERMANY



CENO

CEILING SURFACE



2.0


2x LED 6W | 220-240VAC  
50-60Hz | COB 3-step | phase-cut  
dim | incl. PS | aluminium powder  
coated

0.43kg IP20 35°

90° 350°

|  | CODE     |
|--|----------|
|  | 166361W_ |
|  | 166361B_ |
|  | 166361K_ |
|  | 166361Q_ |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 2x440   >90 | 3    |
| 3000K        | 2x470   >90 | 5    |



4.0

4x LED 6W | 220-240VAC  
50-60Hz | COB 3-step | phase-cut  
dim | incl. PS | aluminium powder  
coated

0.95kg IP20 35°

90° 350°

|  | CODE     |
|--|----------|
|  | 166761W_ |
|  | 166761B_ |
|  | 166761K_ |
|  | 166761Q_ |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 4x440   >90 | 3    |
| 3000K        | 4x470   >90 | 5    |

available from summer 2020





available from autumn 2020


# MICK

## CEILING SURFACE



p. 349 p. 527

DESIGNED BY  
S&R CORNELISSEN



### 1.0


LED 7W | 220-240VAC  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.35kg IP20 0.3-1.0 P

A 25° E 90° C 350°

|  | CODE     |
|--|----------|
|  | 159154J_ |
|  | 159154K_ |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 370   >90   | 3    |
| 3000K        | 390   >90   | 5    |



### 2.0

2x LED 2x7W | 220-240VAC  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.62kg IP20 0.3-1.0 P

A 25° E 90° C 350°

|  | CODE     |
|--|----------|
|  | 159254J_ |
|  | 159254K_ |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 2x370   >90 | 3    |
| 3000K        | 2x390   >90 | 5    |














PRIVATE RESIDENCE BELGIUM

# ROB IP44

CEILING SURFACE



p. 583



## 1.6

LED 13W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim | aluminium  
powder coated | opal PMMA cover

0.70kg IP44 0.3

| CODE     |
|----------|
| 701184W_ |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 860   >90   | 3    |
| 3000K        | 950   >90   | 5    |

## OPTIONAL

dimmer

| CODE                  |
|-----------------------|
| for switch 90019017   |
| for din rail 90019018 |

more specs on page 699

## 2.6

LED 18W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim | aluminium  
powder coated | opal PMMA cover

1.20kg IP44 0.3

| CODE     |
|----------|
| 701284W_ |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 1250   >90  | 3    |
| 3000K        | 1380   >90  | 5    |

## OPTIONAL

dimmer

| CODE                  |
|-----------------------|
| for switch 90019017   |
| for din rail 90019018 |

more specs on page 699

## 3.5

LED 32W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim | aluminium  
powder coated | opal PMMA cover

1.90kg IP44 0.3

| CODE     |
|----------|
| 701384W_ |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 1820   >90  | 3    |
| 3000K        | 1950   >90  | 5    |

## OPTIONAL

dimmer


| CODE                  |
|-----------------------|
| for switch 90019017   |
| for din rail 90019018 |

more specs on page 699



# ROBY IP44

CEILING SURFACE



## 1.6

LED 13W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim | aluminium  
powder coated brushed | opal  
PMMA cover

1.00kg IP44 0.3°

|  | CODE    |
|--|---------|
|  | 135184W |
|  | 135184B |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 750   >90   | 3    |
| 3000K        | 820   >90   | 5    |

## OPTIONAL

dimmer

|              | CODE     |
|--------------|----------|
| for switch   | 90019017 |
| for din rail | 90019018 |

more specs on page 699

## 2.6

LED 18W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim | aluminium  
powder coated brushed | opal  
PMMA cover

1.55kg IP44 0.3°

|  | CODE    |
|--|---------|
|  | 135284W |
|  | 135284B |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 1130   >90  | 3    |
| 3000K        | 1250   >90  | 5    |

## OPTIONAL

dimmer

|              | CODE     |
|--------------|----------|
| for switch   | 90019017 |
| for din rail | 90019018 |

more specs on page 699

## 3.5

LED 32W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim | aluminium  
powder coated brushed | opal  
PMMA cover

2.45kg IP44 0.3°

|  | CODE    |
|--|---------|
|  | 135384W |
|  | 135384B |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 1680   >90  | 3    |
| 3000K        | 1800   >90  | 5    |

## OPTIONAL

dimmer


|              | CODE     |
|--------------|----------|
| for switch   | 90019017 |
| for din rail | 90019018 |

more specs on page 699





FORUM 1



1.0

LED 13W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim| steel wet painted  
opal PMMA cover

1.15kg IP44 0.3

| CODE    |  |
|---------|--|
| 178184W |  |
| 178184J |  |
| 178184P |  |
| 178184K |  |
| 178184Z |  |
| 178184B |  |


| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 780   | >90 | 3    |
| 3000K        | 850   | >90 | 5    |

OPTIONAL

dimmer

| CODE         |          |
|--------------|----------|
| for switch   | 90019017 |
| for din rail | 90019018 |

more specs on page 699



2.0

LED 18W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim| steel wet painted  
opal PMMA cover

1.90kg IP44 0.3

| CODE    |  |
|---------|--|
| 178284W |  |
| 178284J |  |
| 178284P |  |
| 178284K |  |
| 178284Z |  |
| 178284B |  |


| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 1090  | >90 | 3    |
| 3000K        | 1210  | >90 | 5    |

OPTIONAL

dimmer

| CODE         |          |
|--------------|----------|
| for switch   | 90019017 |
| for din rail | 90019018 |

more specs on page 699



3.0

LED 32W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim| steel wet painted  
opal PMMA cover

3.00kg IP44 0.3

| CODE    |  |
|---------|--|
| 178384W |  |
| 178384J |  |
| 178384P |  |
| 178384K |  |
| 178384Z |  |
| 178384B |  |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 1550  | >90 | 3    |
| 3000K        | 1660  | >90 | 5    |

OPTIONAL


dimmer

| CODE         |          |
|--------------|----------|
| for switch   | 90019017 |
| for din rail | 90019018 |

more specs on page 699



PRIVATE RESIDENCE | IMORE INTERIEURARCHITECTUUR BELGIUM



# MIRBI IP44



CEILING SURFACE



p. 261



p. 561



## 1.0

LED 7W | 220-240VAC | 50-60Hz  
PCB 3-step | phase-cut dim  
wet painted PA housing  
clear + opal PMMA cover

0.4 kg IP44 0.3

| CODE     |  |
|----------|--|
| 175188W_ |  |
| 175188E_ |  |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 440   | >90 | 5    |

## 2.0

LED 7W | 220-240VAC | 50-60Hz  
PCB 3-step | phase-cut dim  
wet painted PA housing  
clear + opal PMMA cover

0.5 kg IP44 0.3



| CODE     |  |
|----------|--|
| 175288W_ |  |
| 175288E_ |  |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 440   | >90 | 5    |





SHOWROOM | GRANDO KEUKENS SINT-MARTENS-LATEM | BELGIUM




1.0

LED 35W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
opal cover | two circuits  
aluminium powder coated  
opal PMMA cover

6.30kg IP20  $\pm 0.3^\circ$  P

3000K | >90 CRI | 1820lm

|  | CODE     |
|--|----------|
|  | 132184W5 |
|  | 132184B5 |



2.0

LED 55W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
opal cover + 3x spot | two circuits  
aluminium powder coated  
opal PMMA cover

6.70kg IP20  $\pm 0.3^\circ$  P

3000K | >90 CRI | 2650lm

|  | CODE     |
|--|----------|
|  | 132164W5 |
|  | 132164B5 |

BEBOW

CEILING SURFACE



p. 443



DESIGNED BY  
S&R CORNELISSEN



# BEBOW

CEILING SURFACE

p. 445

DESIGNED BY  
S&R CORNELISSEN

side view

top view

**3.0**

LED 35W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
opal cover | two circuits  
aluminium powder coated  
opal PMMA cover

8.00kg IP20 0.3°

3000K | >90 CRI | 1910lm

|  | CODE     |
|--|----------|
|  | 132284W5 |
|  | 132284B5 |

**4.0**

LED 48W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
opal cover + 2x spot | two circuits  
aluminium powder coated  
opal PMMA cover

8.30kg IP20 0.3°

3000K | >90 CRI | 2350lm

|  | CODE     |
|--|----------|
|  | 132264W5 |
|  | 132264B5 |

WEVER & DUCRÉ 332 — 333





VENN

## CEILING SURFACE



p. 441





p. 549



As awarded by The Chicago Athenaeum:  
Museum of Architecture and Design

DESIGNED BY  
S&R CORNELISSEN



1.0

LED 38W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS  
aluminium powder coated  
opal PMMA cover indirect light



phase-cut dim

CODE



DALI dim

CODE



| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 2100  | >80 | 2    |
| 3000K        | 2250  | >80 | 4    |

## 2.0

LED 47W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS  
aluminium powder coated  
opal PMMA cover dir./indir. light



phase-cut dim

CODE



DALI dim

CODE



| LIGHT COLOUR | LUMEN    | CRI | CODE |
|--------------|----------|-----|------|
| 2700K        | 370/2100 | >80 | 2    |
| 3000K        | 400/2250 | >80 | 4    |

# TRACKS | SYSTEMS

p. 339 — 381

## STREX SYSTEM DALI

**TRACKS  
ACCESSORIES**  
p. 341

**CENO**  
p. 347

**MICK**  
p. 349

**DOTS LIGHT  
MODULE**  
p. 351

**OPAL LIGHT  
MODULE**  
p. 351

**ODREY**  
p. 353

**STUBE**  
p. 355

**SOLLI**  
p. 357

## 1-PHASE TRACK

**TRACKS  
ACCESSORIES**  
p. 359

**SARA ON TRACK**  
p. 361

**SQUBE ON TRACK**  
p. 363

**ODREY**  
p. 365

**RAY**  
p. 367

**HEXO**  
p. 367

## 3-PHASE TRACK

**TRACKS  
ACCESSORIES**  
p. 369

**SQUBE ON TRACK**  
p. 371

**RAY**  
p. 377

**HEXO**  
p. 377

## ELLO SYSTEM

**ELLO SYSTEM**  
p. 379











# EVERYTHING ON TRACK

## THREE WAYS TO MAKE THEM SHINE

It's normal to go off the rails when it comes to tracks. That's why we need a quick introduction. You can essentially choose between three options. The simplest is the 1-phase track. This system controls light sources from one point and switches them all on and off together. You'd prefer to operate each luminaire individually? Then we recommend the 3-phase track, where spotlights, fluorescent lamps and suspended luminaires are connected and controlled separately. The 48-volt system is new in the range. It allows spotlights and suspended luminaires, and also various sets of spots and opal insets for general lighting, to be inserted and moved with ease. This means you can always react flexibly to changes in the room. The system can be easily controlled by your smartphone, which is especially practical.

Dass man bei Schienen erst mal Bahnhof versteht, ist ganz normal. Deshalb gibt's hier eine schnelle Einführung. Grundsätzlich können Sie zwischen drei Möglichkeiten wählen. Die einfachste ist die 1-Phasen-Schiene, bei der alle Lichtquellen von einem Punkt aus angesteuert und zusammen ein- und ausgeschaltet werden. Sie möchten Ihre Leuchten einzeln bedienen? Dann empfiehlt sich eine 3-Phasen-Schiene, bei der Strahler, Leuchtstofflampen und Hängeleuchten separat angeschlossen und gesteuert werden. Neu im Programm: Das 48-Volt-System. Mit ihm lassen sich nicht nur Strahler oder Hängeleuchten, sondern auch verschiedene Spots- und Opalinsets – zur Allgemeinbeleuchtung – ganz einfach einsetzen und verschieben. So kann jederzeit flexibel auf Veränderungen im Raum reagiert werden. Besonders praktisch: Das System lässt sich ganz bequem vom Smartphone aus steuern.

|   | STREX TRACK SYSTEM<br>48V DALI   p. 341                                                                                                                                                                                                | 1-PHASE TRACK<br>220–240V   p. 359                                                                                                                                  | 3-PHASE TRACK<br>220–240V   p. 369                                                                                                               |
|---|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | <div>CHOOSE YOUR MOUNTING</div> <div></div> <div><div>recessed</div><div>surface</div><div>suspended</div><div>suspended indirect light</div></div> | <div></div> <div><div>recessed</div><div>surface</div><div>suspended</div></div> | <div></div> <div><div>surface</div><div>suspended</div></div> |
| 2 | <div>COMBINE IT WITH DIFFERENT INSETS</div> <div></div>                                                                                            | <div></div>                                                                     | <div></div>                                                  |
| 3 | <div>INSTALL IT IN YOUR FAVOURITE LAYOUT</div> <div></div>                                                                                        | <div></div>                                                                    | <div></div>                                                 |

For more support and extended layout of track systems, please check our FAQ section on [weverducre.com/faq](https://weverducre.com/faq)





# STREX SYSTEM

RECESSED | 48V DALI TRACKS

## RECESSED EXAMPLES

for more support, extended layout or other lengths of 48V systems,  
please check our FAQ section on [weverducre.com/faq](https://weverducre.com/faq)  
max. system length per power supply 15.0m




### RECESSED

track 48V | 15A | DALI

28-30 5-25 SELV

|      | CODE     |
|------|----------|
| 1.0m | 90014187 |
| 1.0m | 90014188 |
| 2.0m | 90014189 |
| 2.0m | 90014190 |
| 3.0m | 90014191 |
| 3.0m | 90014192 |




### A | MOUNTING BRACKET

recessed mounting bracket

| CODE     |
|----------|
| 90014193 |

for 1.0m - 2pcs needed  
for 2.0m - 4pcs needed  
for 3.0m - 6pcs needed




### F | POWER SUPPLY

remote converter | 220-240VAC  
50-60Hz | 48V | for connection to  
power feed

| CODE                |
|---------------------|
| 100W   48V 90218901 |
| 150W   48V 90218902 |


for DALI SELV solution on page 699



### B | POWER FEED

48V | 15A | DALI | end/middle power  
feeder | max. 4 x 1.5mm<sup>2</sup>

| CODE     |
|----------|
| 90014153 |
| 90014154 |



### C | CONNECTOR

48V | 15A | DALI | electrical/  
mechanical connector

| CODE     |
|----------|
| 90014196 |
| 90014197 |

### WIRELESS CONTROL

2400-2483.5mHz | adapter for DALI  
wireless management

| CODE     |
|----------|
| 90014194 |
| 90014195 |



### D | END CAP

| CODE     |
|----------|
| 90014149 |
| 90014150 |

available from autumn 2020



Download the App for Setup and  
Control to start dimming.







# STREX SYSTEM

SURFACE | 48V DALI TRACKS

## SURFACE EXAMPLES

for more support, extended layout or other lengths of 48V systems, please check our FAQ section on [weverducre.com/faq](https://weverducre.com/faq)  
max. system length per power supply 15.0m

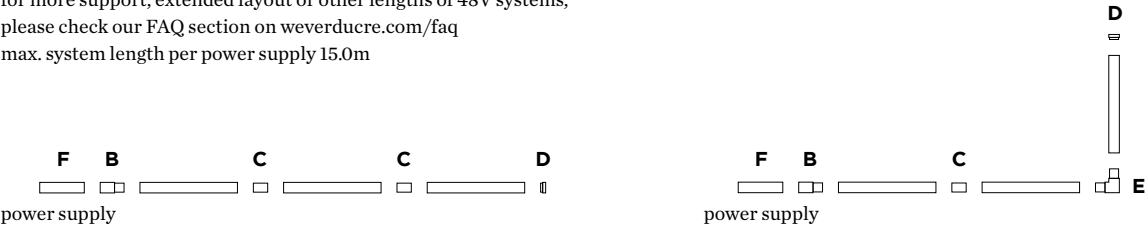

## SURFACE

track 48V | 15A | DALI




| CODE             |          |
|------------------|----------|
| <div></div> 1.0m | 90014181 |
| <div></div> 1.0m | 90014182 |
| <div></div> 2.0m | 90014183 |
| <div></div> 2.0m | 90014184 |
| <div></div> 3.0m | 90014185 |
| <div></div> 3.0m | 90014186 |

available from autumn 2020

## F | POWER SUPPLY

profile converter box incl. PS  
220-240VAC | 50-60Hz  
48V | incl. DALI through wiring  
for connection to power feed



| CODE             |          |
|------------------|----------|
| <div></div> 100W | 90014166 |
| <div></div> 100W | 90014167 |
| <div></div> 150W | 90014170 |
| <div></div> 150W | 90014171 |

remote converter | 220-240VAC  
50-60Hz | 48V | for connection to  
power feed

| CODE       |          |
|------------|----------|
| 100W   48V | 90218901 |
| 150W   48V | 90218902 |

for DALI SELV solution on page 699

## B | POWER FEED

48V | 15A | DALI | end/middle power  
feeder | max. 4 x 1.5mm<sup>2</sup>

| CODE        |          |
|-------------|----------|
| <div></div> | 90014153 |
| <div></div> | 90014154 |




## D | END CAP

| CODE        |          |
|-------------|----------|
| <div></div> | 90014147 |
| <div></div> | 90014148 |

## C | CONNECTOR

48V | 15A | DALI | electrical/  
mechanical connector

| CODE        |          |
|-------------|----------|
| <div></div> | 90014196 |
| <div></div> | 90014197 |



## E | L-CONNECTOR

48V | 15A | DALI | electrical/  
mechanical connector left and right

| CODE        |          |
|-------------|----------|
| <div></div> | 90014198 |
| <div></div> | 90014199 |

## WIRELESS CONTROL

2400-2483.5mHz | adapter for DALI  
wireless management

| CODE        |          |
|-------------|----------|
| <div></div> | 90014194 |
| <div></div> | 90014195 |



Download the App for Setup and  
Control to start dimming.





# STREX SYSTEM

SUSPENDED | 48V DALI TRACKS

## SUSPENDED EXAMPLES

for more support, extended layout or other lengths of 48V systems, please check our FAQ section on [weverducre.com/faq](https://weverducre.com/faq)  
max. system length per power supply 15.0m

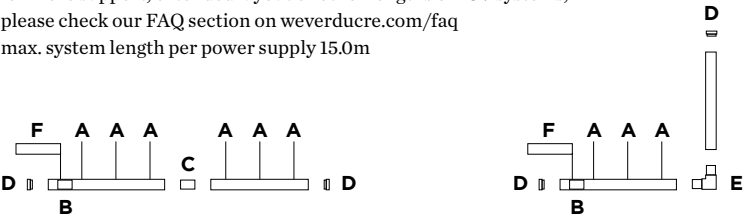

### SUSPENDED


track 48V | 15A | DALI



|                                                                                          | CODE     |
|------------------------------------------------------------------------------------------|----------|
|  1.0m | 90014181 |
|  1.0m | 90014182 |

|                                                                                          |          |
|------------------------------------------------------------------------------------------|----------|
|  2.0m | 90014183 |
|  2.0m | 90014184 |

|                                                                                          |          |
|------------------------------------------------------------------------------------------|----------|
|  3.0m | 90014185 |
|  3.0m | 90014186 |



### SUSP. INDIRECT LIGHT


track 48V | 15A | DALI  
with indirect light



|                                                                                          | CODE     |
|------------------------------------------------------------------------------------------|----------|
|  2.0m | 900140W_ |
|  2.0m | 900140B_ |

|                                                                                          | CODE     |
|------------------------------------------------------------------------------------------|----------|
|  3.0m | 900141W_ |
|  3.0m | 900141B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K   29W  | 1650  | >90 | 5    |




### A | SUSPENSION SET

complete suspension set  
incl. ceiling fixation bracket


|      | CODE     |
|------|----------|
| 1.5m | 90014160 |
| 3.0m | 90014161 |

for 1.0m - 2pcs needed  
for 2.0m - 3pcs needed  
for 3.0m - 4pcs needed



### F | POWER SUPPLY


ceiling base incl. power supply  
220-240VAC | 50-60Hz | 48V  
incl. DALI through wiring  
for connection to end feed



|                                                                                            | CODE     |
|--------------------------------------------------------------------------------------------|----------|
|  100W | 90014168 |
|  100W | 90014169 |

|                                                                                            |          |
|--------------------------------------------------------------------------------------------|----------|
|  150W | 90014172 |
|  150W | 90014173 |


for DALI SELV solution on page 699



### B | POWER FEED

48V | 15A | DALI | end/middle power  
feeder | max. 4 x 1.5mm<sup>2</sup>


|                                                                                          | CODE     |
|------------------------------------------------------------------------------------------|----------|
|  18  | 90014153 |
|  18 | 90014154 |



### C | CONNECTOR

48V | 15A | DALI | electrical/  
mechanical connector

|                                                                                          | CODE     |
|------------------------------------------------------------------------------------------|----------|
|  18  | 90014196 |
|  18 | 90014197 |



### WIRELESS CONTROL


2400-2483.5mHz | adapter for DALI  
wireless management

|                                                                                          | CODE     |
|------------------------------------------------------------------------------------------|----------|
|  18  | 90014194 |
|  18 | 90014195 |



### D | END CAP

|                                                                                          | CODE     |
|------------------------------------------------------------------------------------------|----------|
|  26 | 90014147 |
|  26 | 90014148 |



### E | L-CONNECTOR

48V | 15A | DALI | electrical/  
mechanical connector left and right


|                                                                                          | CODE     |
|------------------------------------------------------------------------------------------|----------|
|  18 | 90014198 |
|  18 | 90014199 |

available from autumn 2020



Download the App for Setup and  
Control to start dimming.



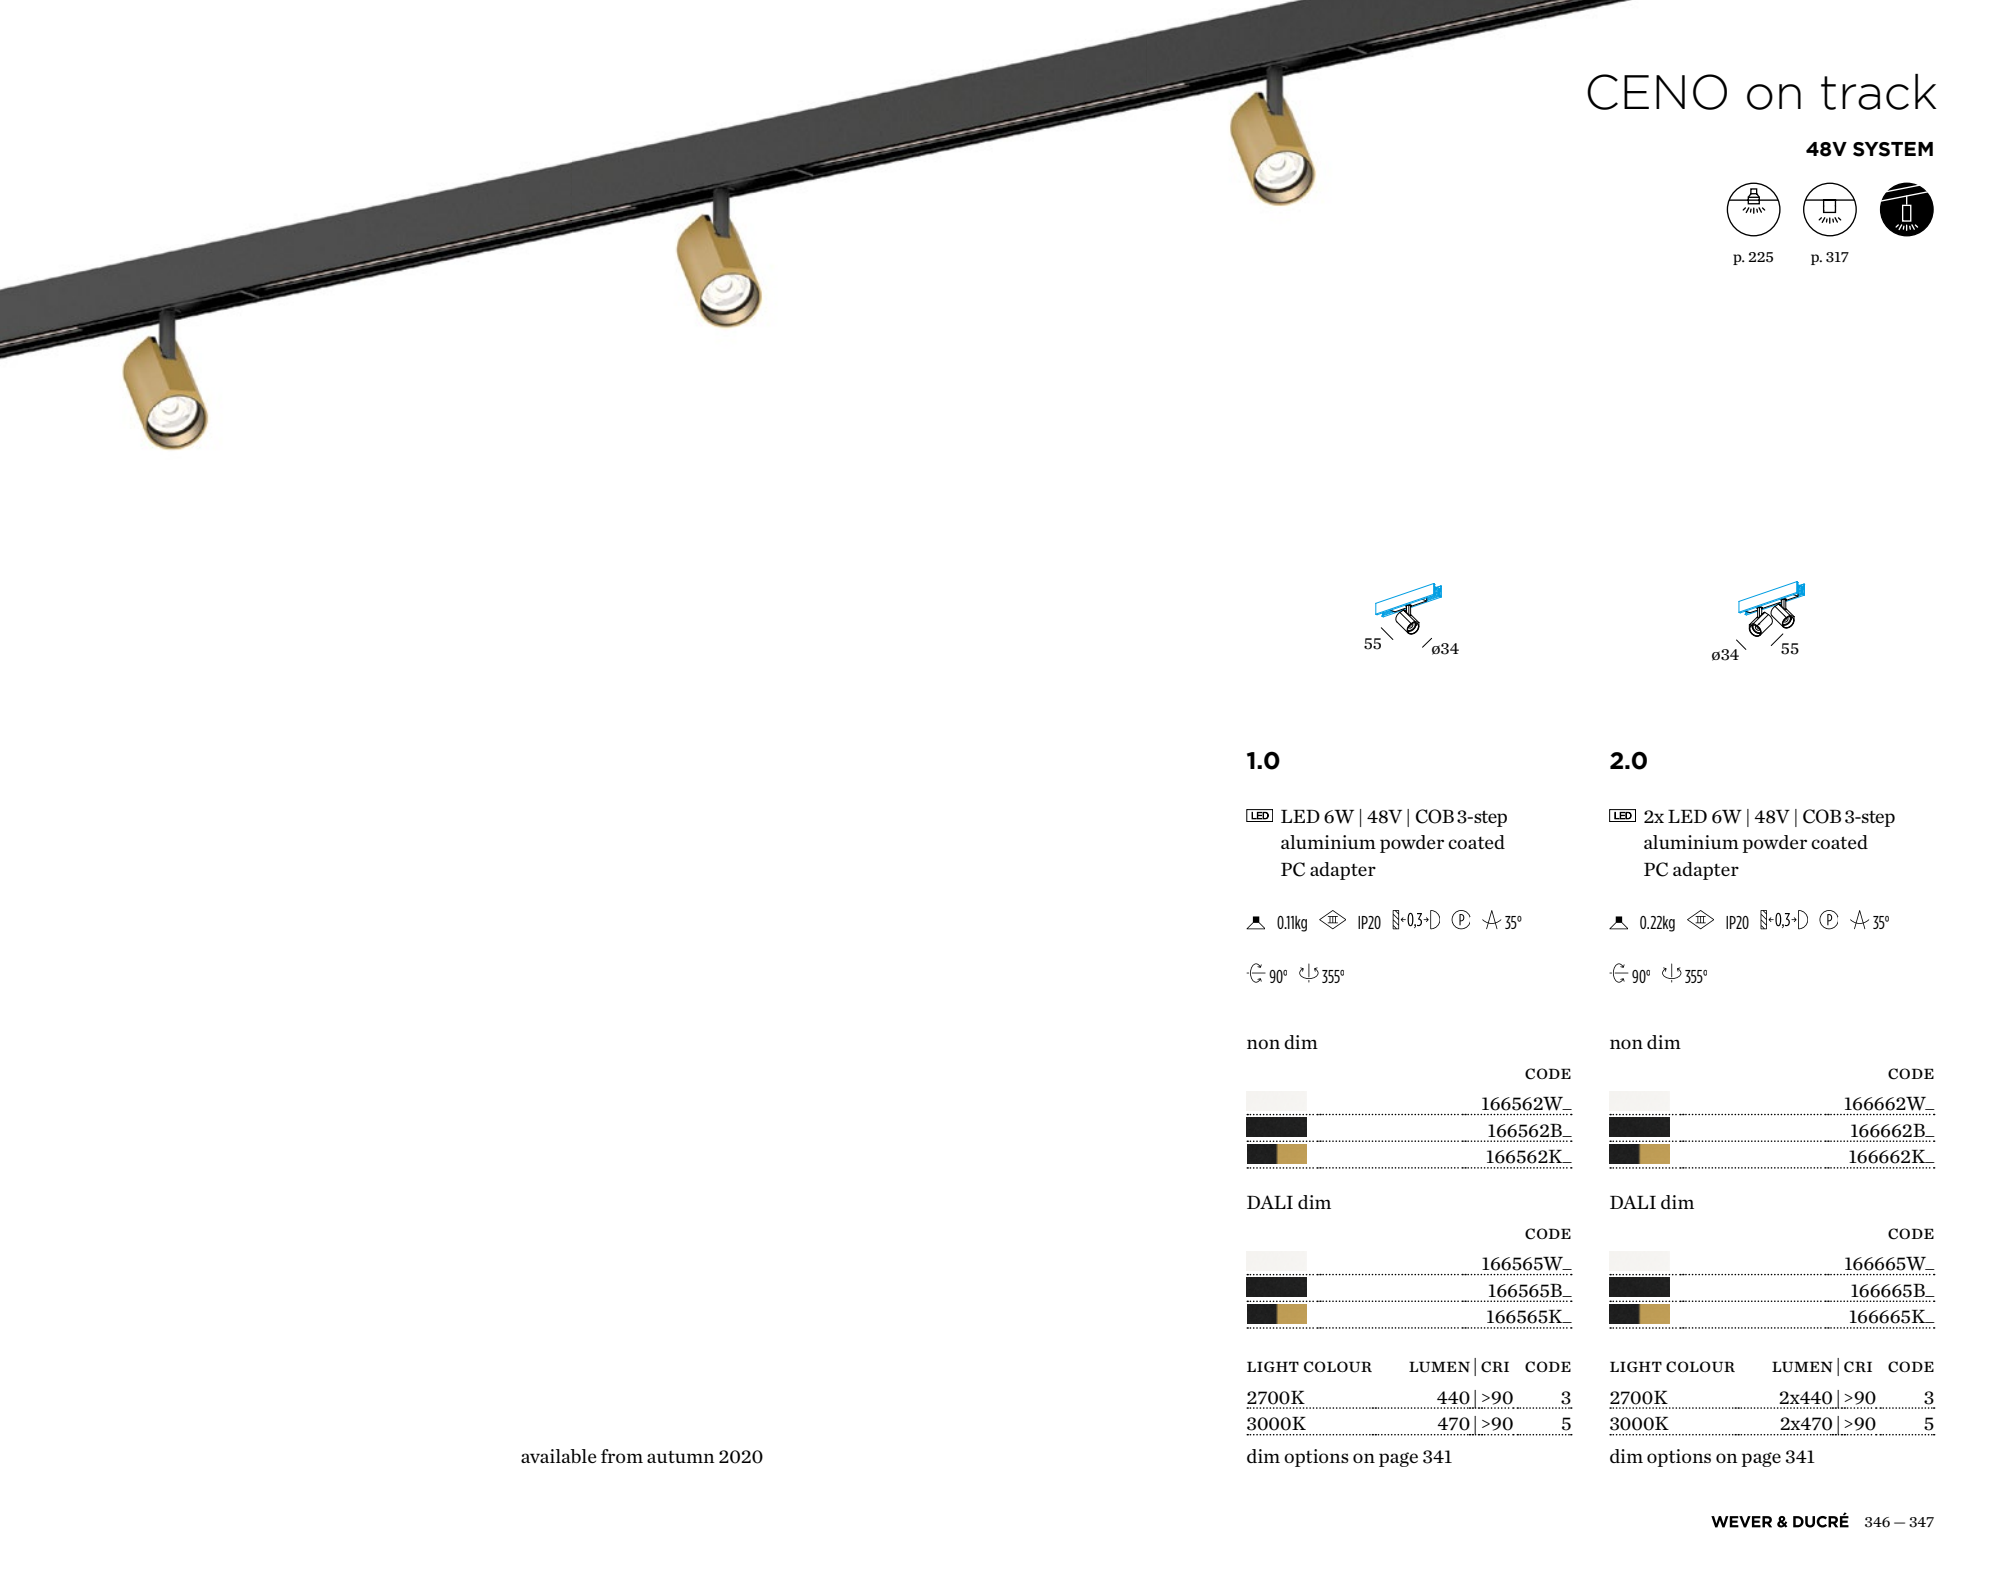

# CENO on track

## 48V SYSTEM



### 1.0

LED 6W | 48V | COB 3-step  
aluminium powder coated  
PC adapter

0.11kg IP20 0.3-1° 35°

90° 355°

non dim

|  | CODE     |
|--|----------|
|  | 166562W_ |
|  | 166562B_ |
|  | 166562K_ |

DALI dim

|  | CODE     |
|--|----------|
|  | 166565W_ |
|  | 166565B_ |
|  | 166565K_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 440   | >90 | 3    |
| 3000K        | 470   | >90 | 5    |

dim options on page 341

### 2.0

2x LED 6W | 48V | COB 3-step  
aluminium powder coated  
PC adapter

0.22kg IP20 0.3-1° 35°

90° 355°

non dim

|  | CODE     |
|--|----------|
|  | 166662W_ |
|  | 166662B_ |
|  | 166662K_ |

DALI dim

|  | CODE     |
|--|----------|
|  | 166665W_ |
|  | 166665B_ |
|  | 166665K_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 2x440 | >90 | 3    |
| 3000K        | 2x470 | >90 | 5    |

dim options on page 341

available from autumn 2020



# MICK on track

48V SYSTEM

p. 319

p. 527

DESIGNED BY  
S&R CORNELISSEN

130 26 26

26 26 130

## 1.0

LED 6W | 48V | COB 3-step aluminium powder coated PC adapter

0.22kg IP20 0.3° DALI 25°

90° 355°

non dim

|  | CODE     |
|--|----------|
|  | 159462J_ |
|  | 159462K_ |

DALI dim

|  | CODE     |
|--|----------|
|  | 159465J_ |
|  | 159465K_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 350   | >90 | 3    |
| 3000K        | 370   | >90 | 5    |

dim options on page 341

## 2.0

2x LED 6W | 48V | COB 3-step aluminium powder coated PC adapter

0.44kg IP20 0.3° DALI 25°

90° 355°

non dim

|  | CODE     |
|--|----------|
|  | 159562J_ |
|  | 159562K_ |

DALI dim

|  | CODE     |
|--|----------|
|  | 159565J_ |
|  | 159565K_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 2x350 | >90 | 3    |
| 3000K        | 2x370 | >90 | 5    |

dim options on page 341

available from autumn 2020




WEVER & DUCRÉ 348 — 349





# STREX MODULE

48V SYSTEM



## 1.0 DOT

LED 10W | 48V | PCB 3-step  
aluminium powder coated  
PC cover

0.11kg IP20 0.3m P 26°

non dim

|  | CODE    |
|--|---------|
|  | 171142W |
|  | 171142B |

DALI dim

|  | CODE    |
|--|---------|
|  | 171145W |
|  | 171145B |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 900   | >90 | 3    |
| 3000K        | 1000  | >90 | 5    |

dim options on page 341

## 1.0 OPAL

LED 8W | 48V | PCB 3-step  
aluminium powder coated  
PC cover

0.16kg IP20 0.3m P

non dim

|  | CODE    |
|--|---------|
|  | 171182W |
|  | 171182B |

DALI dim

|  | CODE    |
|--|---------|
|  | 171185W |
|  | 171185B |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 540   | >90 | 3    |
| 3000K        | 600   | >90 | 5    |

dim options on page 341

## 2.0 OPAL

LED 16W | 48V | PCB 3-step  
aluminium powder coated  
PC cover

0.32kg IP20 0.3m P

non dim

|  | CODE    |
|--|---------|
|  | 171282W |
|  | 171282B |

DALI dim

|  | CODE    |
|--|---------|
|  | 171285W |
|  | 171285B |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 1080  | >90 | 3    |
| 3000K        | 1200  | >90 | 5    |


dim options on page 341



available from autumn 2020

ODREY on track


48V SYSTEM



p. 387 p. 491



available from autumn 2020



1.0

LED 5W | 48V | COB 3-step  
aluminium wet painted  
PC adapter

0.25kg IP20 0.3-32°

DALI dim

|  | CODE    |
|--|---------|
|  | 257165G |
|  | 257165B |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 335   >90   | 3    |
| 3000K        | 350   >90   | 5    |

dim options on page 341

ALWAYS USE

shade 1.0 - 8.0 in gold

|     |  | CODE     |
|-----|--|----------|
| 1.0 |  | 911421G1 |
| 2.0 |  | 911422G1 |
| 3.0 |  | 911423G1 |
| 4.0 |  | 911424G1 |
| 5.0 |  | 911425G1 |
| 6.0 |  | 911426G1 |
| 7.0 |  | 911427G1 |
| 8.0 |  | 911428G1 |

shade 1.0 - 8.0 in black



|     |  | CODE     |
|-----|--|----------|
| 1.0 |  | 911421B1 |
| 2.0 |  | 911422B1 |
| 3.0 |  | 911423B1 |
| 4.0 |  | 911424B1 |
| 5.0 |  | 911425B1 |
| 6.0 |  | 911426B1 |
| 7.0 |  | 911427B1 |
| 8.0 |  | 911428B1 |





STUBE on track

48V SYSTEM

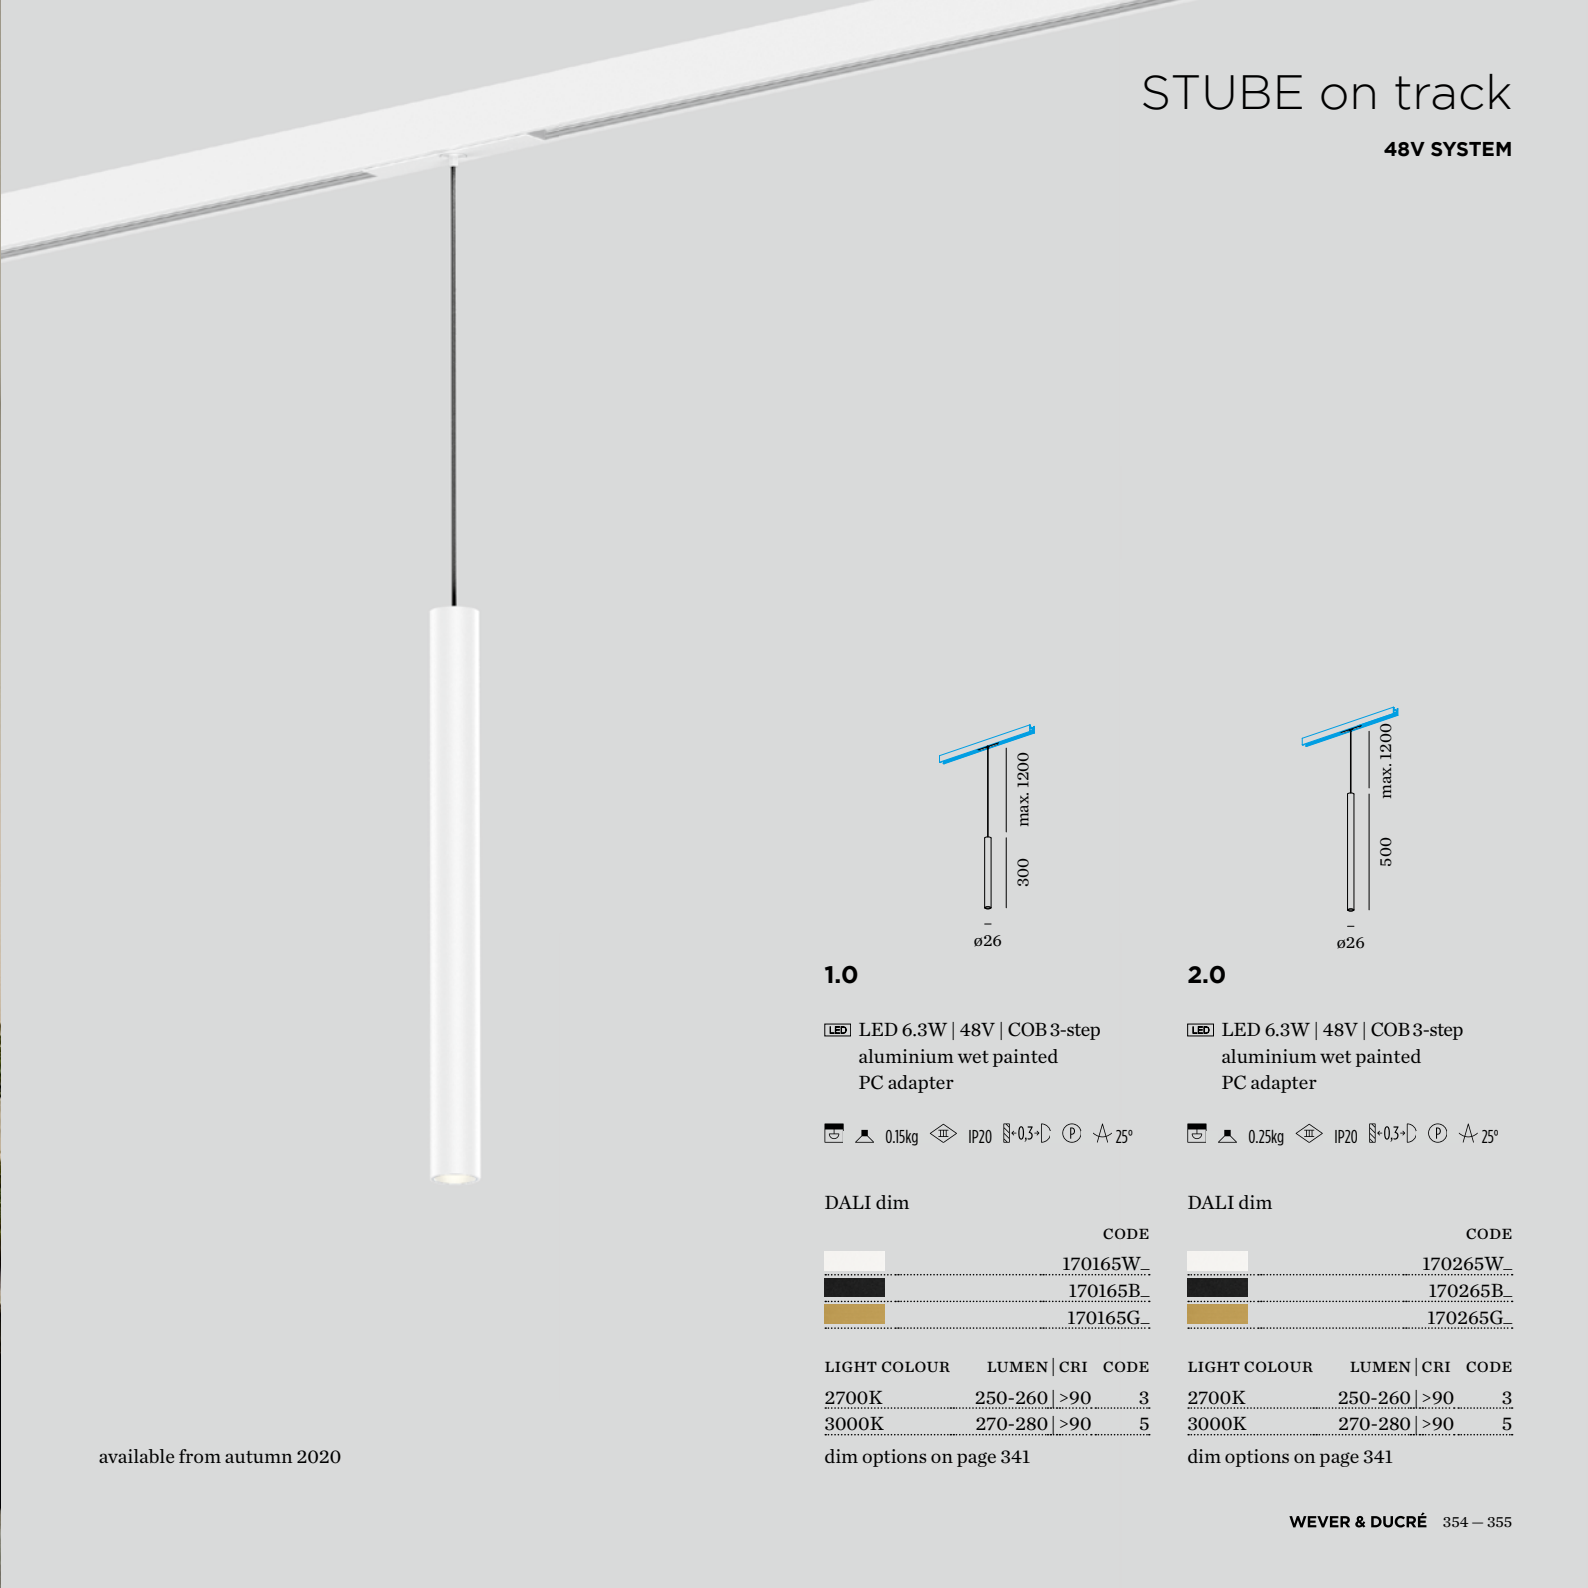

1.0

LED 6.3W | 48V | COB 3-step  
aluminium wet painted  
PC adapter


0.15kg IP20 0.3° P A 25°

DALI dim

|  | CODE     |
|--|----------|
|  | 170165W_ |
|  | 170165B_ |
|  | 170165G_ |

| LIGHT COLOUR | LUMEN   | CRI | CODE |
|--------------|---------|-----|------|
| 2700K        | 250-260 | >90 | 3    |
| 3000K        | 270-280 | >90 | 5    |

dim options on page 341



2.0

LED 6.3W | 48V | COB 3-step  
aluminium wet painted  
PC adapter

0.25kg IP20 0.3° P A 25°


DALI dim

|  | CODE     |
|--|----------|
|  | 170265W_ |
|  | 170265B_ |
|  | 170265G_ |

| LIGHT COLOUR | LUMEN   | CRI | CODE |
|--------------|---------|-----|------|
| 2700K        | 250-260 | >90 | 3    |
| 3000K        | 270-280 | >90 | 5    |


dim options on page 341

available from autumn 2020

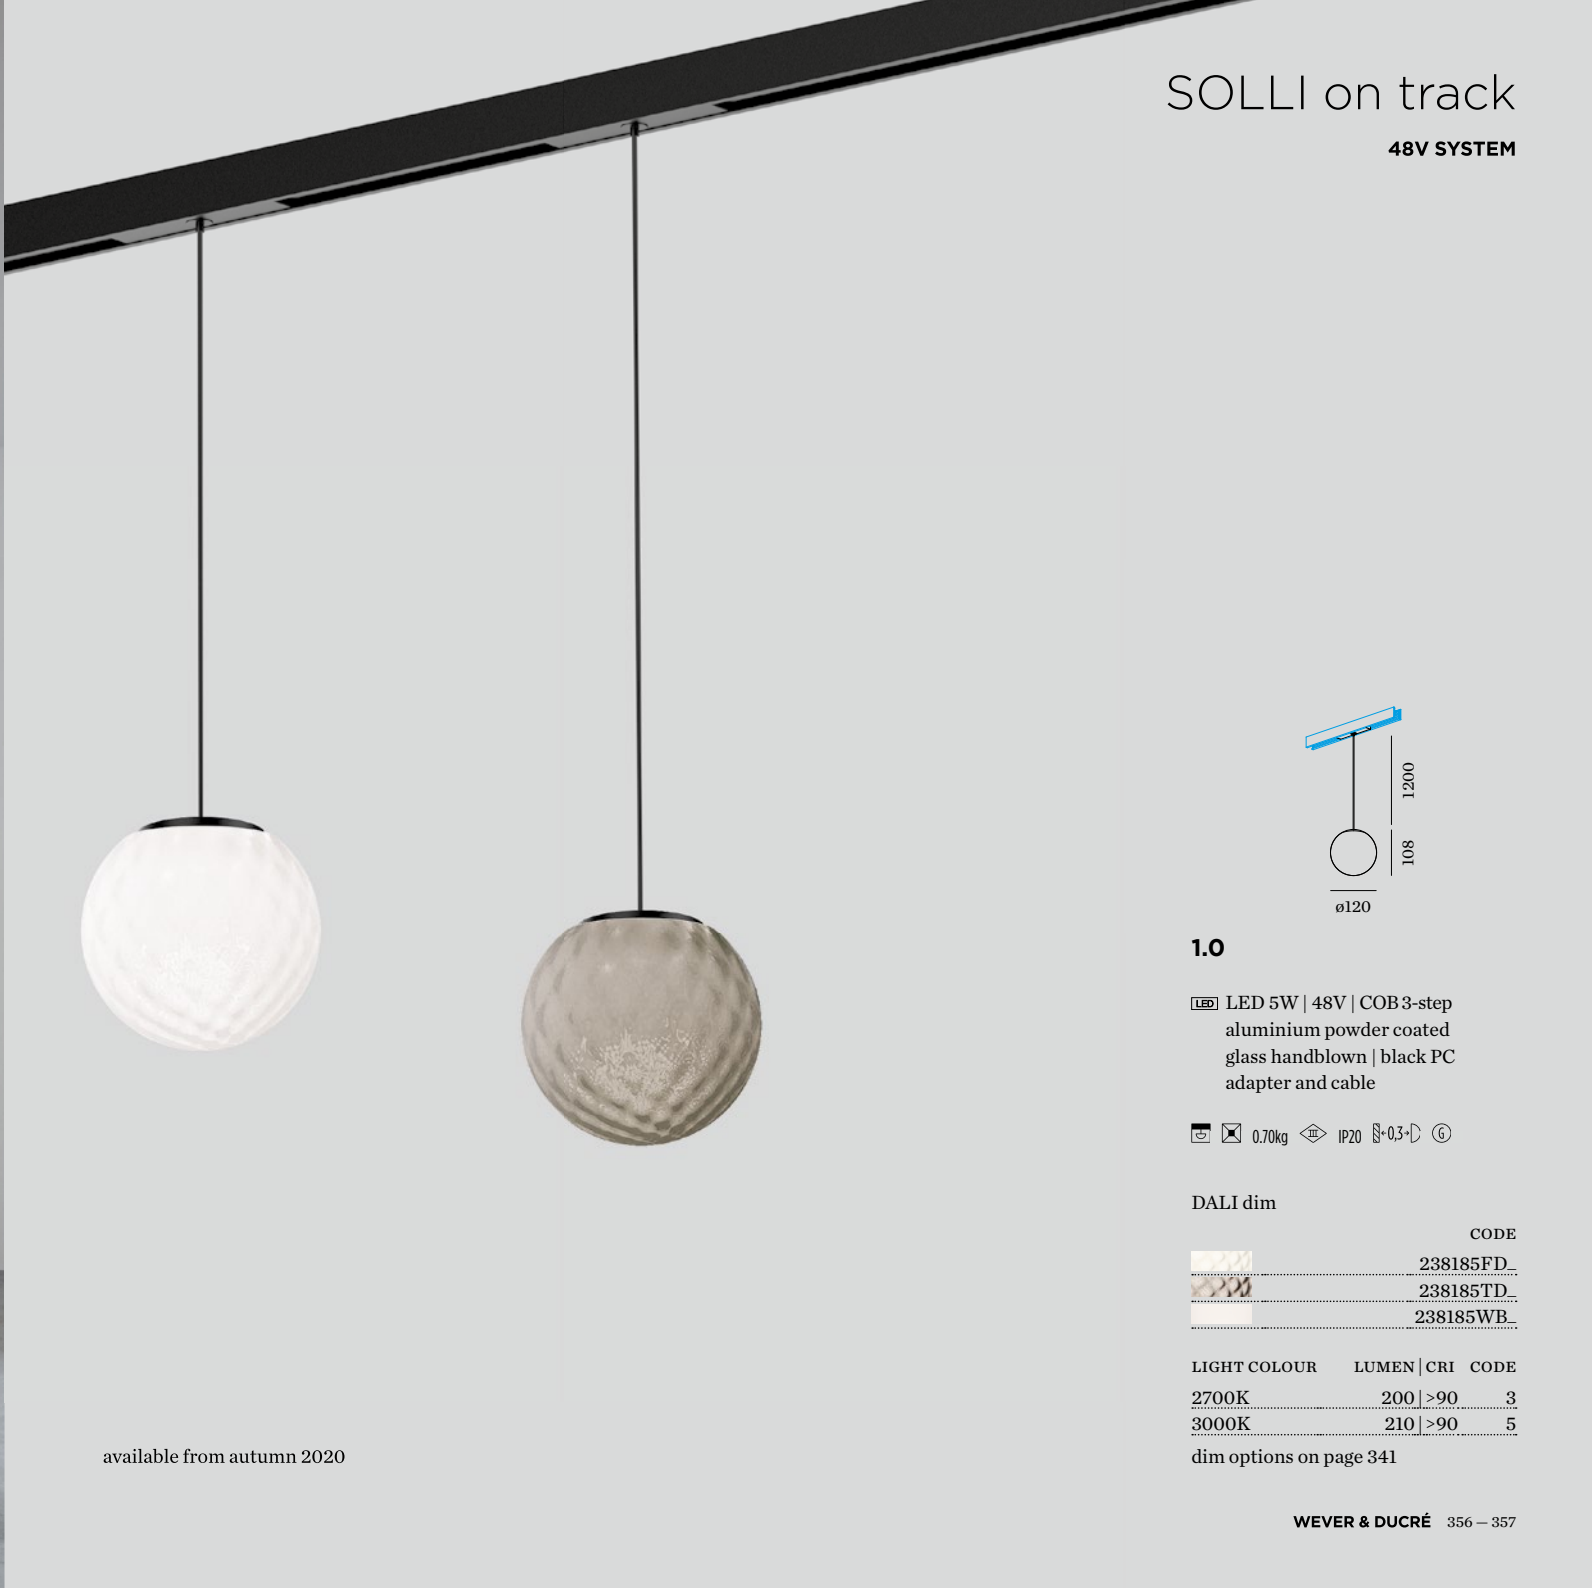

# SOLLI on track

48V SYSTEM



1.0

LED 5W | 48V | COB 3-step  
aluminium powder coated  
glass handblown | black PC  
adapter and cable

0.70kg IP20 0.3m

DALI dim


|                                                                                       |  | CODE      |
|---------------------------------------------------------------------------------------|--|-----------|
|  |  | 238185FD_ |
|  |  | 238185TD_ |
|  |  | 238185WB_ |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 200   >90   | 3    |
| 3000K        | 210   >90   | 5    |

dim options on page 341

available from autumn 2020




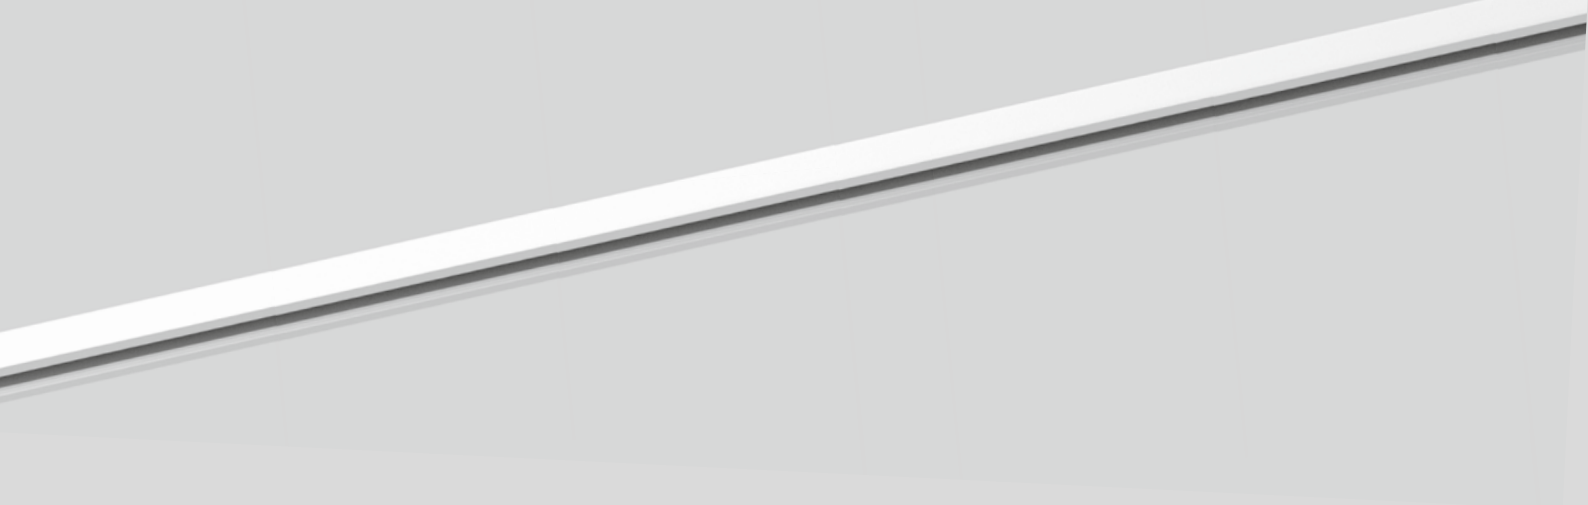


# 1-PHASE TRACKS

## 220-240V TRACKS | ACCESSORIES

### RECESSED | SURFACE | SUSPENDED EXAMPLES

configuration as seen from top view  
for more support and extended layout of 1-phase tracks,  
please check our FAQ section on [weverducre.com/faq](https://weverducre.com/faq)

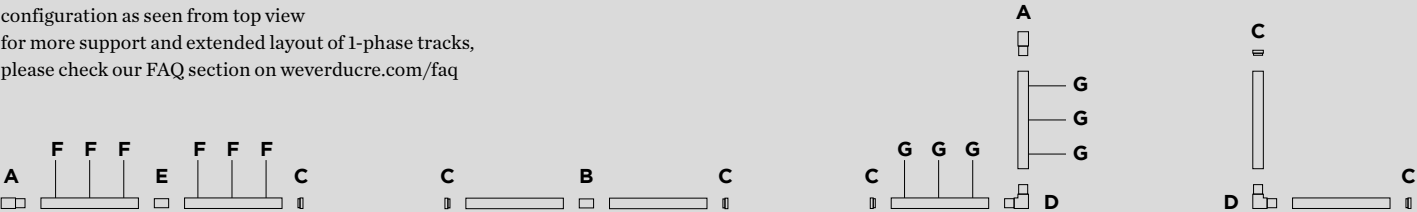

### TRACK PROFILE


recessed | 220-240V | 16A



|                                       | CODE     |
|---------------------------------------|----------|
| <div><div></div><div>1.0m</div></div> | 90014118 |
| <div><div></div><div>1.0m</div></div> | 90014119 |

|                                       |          |
|---------------------------------------|----------|
| <div><div></div><div>2.0m</div></div> | 90014120 |
| <div><div></div><div>2.0m</div></div> | 90014121 |

|                                       |          |
|---------------------------------------|----------|
| <div><div></div><div>3.0m</div></div> | 90014122 |
| <div><div></div><div>3.0m</div></div> | 90014123 |




### F | MOUNTING BRACKET

for recessed fixation

|  | CODE     |
|--|----------|
|  | 90014100 |

for 1.0m - 2pcs needed  
for 2.0m - 3pcs needed  
for 3.0m - 4pcs needed



### TRACK PROFILE

surface | suspended | 220-240V | 16A



|                                       | CODE     |
|---------------------------------------|----------|
| <div><div></div><div>1.0m</div></div> | 90014001 |
| <div><div></div><div>1.0m</div></div> | 90014007 |

|                                       |          |
|---------------------------------------|----------|
| <div><div></div><div>2.0m</div></div> | 90014002 |
| <div><div></div><div>2.0m</div></div> | 90014008 |

|                                       |          |
|---------------------------------------|----------|
| <div><div></div><div>3.0m</div></div> | 90014003 |
| <div><div></div><div>3.0m</div></div> | 90014009 |




### G | SUSPENSION SET

complete suspension set  
incl. ceiling fixation bracket

|                                       | CODE     |
|---------------------------------------|----------|
| <div><div></div><div>1.5m</div></div> | 90014101 |
| <div><div></div><div>1.5m</div></div> | 90014102 |

|                                       |          |
|---------------------------------------|----------|
| <div><div></div><div>3.0m</div></div> | 90014103 |
| <div><div></div><div>3.0m</div></div> | 90014104 |

for 1.0m - 2pcs needed  
for 2.0m - 3pcs needed  
for 3.0m - 4pcs needed



### A | END FEED


220-240V | max. 3 x 1.5mm<sup>2</sup> - 16A

left

|                                   | CODE     |
|-----------------------------------|----------|
| <div><div></div><div></div></div> | 90014018 |
| <div><div></div><div></div></div> | 90014019 |

right

|                                   | CODE     |
|-----------------------------------|----------|
| <div><div></div><div></div></div> | 90014020 |
| <div><div></div><div></div></div> | 90014021 |



### D | L-CONNECTOR


can be used as feed  
220-240V | max. 3 x 1.5mm<sup>2</sup> - 16A

left

|                                   | CODE     |
|-----------------------------------|----------|
| <div><div></div><div></div></div> | 90014024 |
| <div><div></div><div></div></div> | 90014025 |

right

|                                   | CODE     |
|-----------------------------------|----------|
| <div><div></div><div></div></div> | 90014026 |
| <div><div></div><div></div></div> | 90014027 |



### B | MIDDLE FEED

straight  
220-240V | max. 3 x 1.5mm<sup>2</sup> - 16A


|                                   | CODE     |
|-----------------------------------|----------|
| <div><div></div><div></div></div> | 90014036 |
| <div><div></div><div></div></div> | 90014037 |



### E | CONNECTOR

straight | 220-240V | 16A

|                                   | CODE     |
|-----------------------------------|----------|
| <div><div></div><div></div></div> | 90014022 |
| <div><div></div><div></div></div> | 90014023 |



### C | END CAP LEFT/RIGHT

|                                   | CODE     |
|-----------------------------------|----------|
| <div><div></div><div></div></div> | 90014028 |
| <div><div></div><div></div></div> | 90014029 |



### COVERPLATE END FEED

only use with recessed tracks

|                                   | CODE     |
|-----------------------------------|----------|
| <div><div></div><div></div></div> | 90014124 |
| <div><div></div><div></div></div> | 90014125 |

more 1-phase track accessories on  
page 710



RESTAURANT ENSO | TIM DE TAEYE KNOKKE-HEIST | BELGIUM

# SARA on track

**1-PHASE**





p. 309



p. 523



p. 523



### 1.0 LED

 LED 8W | 220-240VAC  
COB 3-step | phase-cut dim  
aluminium powder coated  
incl. 1-phase Global® track adapter

  0.24kg  IP20  34°  34°

 90°  355°

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 157164W_ |
|  | 157164G_ |
|  | 157164B_ |
|  | 157164K_ |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 500   >80   | 2    |
| 3000K        | 530   >80   | 4    |

### OPTIONAL

dimmer

|              | CODE     |
|--------------|----------|
| for switch   | 90019017 |
| for din rail | 90019018 |

more specs on page 699

### 1.0 PAR16

 PAR16 max. 12W | GU10  
100-240VAC  
aluminium powder coated  
incl. 1-phase Global® track adapter

  0.16kg  IP20  34°

 90°  355°

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 157120W0 |
|  | 157120G0 |
|  | 157120B0 |
|  | 157120K0 |

### OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

|            | CODE     |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |


more lamps and specs on page 701



W



G



B



K





WINE AND TAPAS BAR BOBO & CO DESTELBERGEN | BELGIUM





# SQUBE on track

1-PHASE



p. 311



## 1.0 LED

LED 6W | 220-240VAC | 50-60Hz  
COB 3-step | phase-cut dim  
aluminium powder coated  
incl. 1-phase Global® track adapter

0.36kg IP20 0.3-1° 39°

90° 355°

## 1.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
incl. 1-phase Global® track adapter

0.32kg IP20 0.3-1° 36°

90° 355°

|  | CODE     |
|--|----------|
|  | 144164W_ |
|  | 144164B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 415   | >80 | 2    |
| 3000K        | 430   | >80 | 4    |
| 1800-3000K   | 350   | >80 | 9    |

more 1-phase track accessories on  
page 710

## OPTIONAL

dimmer

|              | CODE     |
|--------------|----------|
| for switch   | 90019017 |
| for din rail | 90019018 |

more specs on page 699

|  | CODE     |
|--|----------|
|  | 144120W0 |
|  | 144120B0 |


## OPTIONAL

PAR16 LED GU10 7W | phase-cut dim  
CODE

|            |          |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701

more 1-phase track accessories on  
page 710



### OPTIONAL

inner cover 1.0

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 911420G0 |
|  | 911420B0 |

suitable for shades 6.0 | 7.0 | 8.0

inner cover 2.0



|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 911430G0 |
|  | 911430B0 |

suitable for shade 2.0

available from summer 2020

## ODREY on track

1-PHASE



### 1.0

 PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium wet painted  
incl. 1-phase Global® track adapter

  0.22kg  IP20   $\pm 0.3^{\circ}$

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 257220G0 |
|  | 257220B0 |

### ALWAYS USE

shade 1.0 - 8.0 in gold

|                                                                                           | CODE     |
|-------------------------------------------------------------------------------------------|----------|
|  1.0   | 911421G1 |
|  2.0  | 911422G1 |
|  3.0 | 911423G1 |
|  4.0 | 911424G1 |
|  5.0 | 911425G1 |
|  6.0 | 911426G1 |
|  7.0 | 911427G1 |
|  8.0 | 911428G1 |

shade 1.0 - 8.0 in black

|                                                                                           | CODE     |
|-------------------------------------------------------------------------------------------|----------|
|  1.0 | 911421B1 |
|  2.0 | 911422B1 |
|  3.0 | 911423B1 |
|  4.0 | 911424B1 |
|  5.0 | 911425B1 |
|  6.0 | 911426B1 |
|  7.0 | 911427B1 |
|  8.0 | 911428B1 |


### OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

|            | CODE     |
|------------|----------|
| 2700K      | 901228B3 |
| 3000K      | 901228B5 |
| 1800-2850K | 901229S9 |


more lamps and specs on page 701



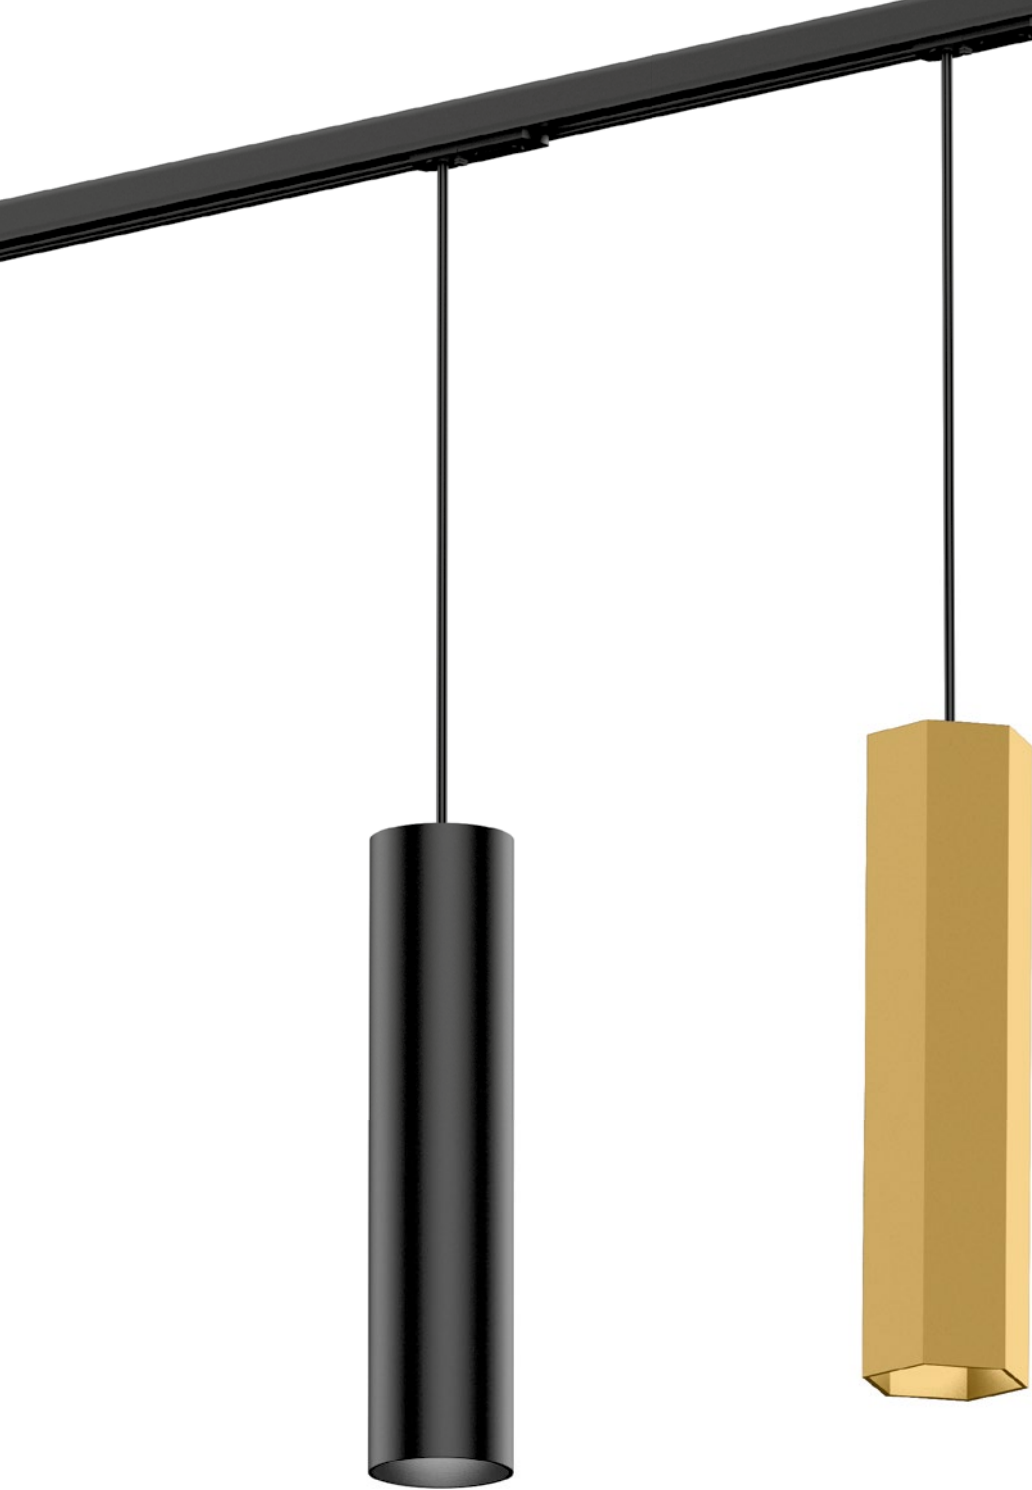

# SUSPENSIONS on track

1-PHASE



## RAY 2.0 | 3.0 LED


LED 6W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed | incl. 1-phase Global®  
track adapter

0.62 | 0.76kg IP20 36°

| 2.0   | CODE    |
|-------|---------|
| 200mm |         |
|       | 217564W |
|       | 217564L |
|       | 217564G |
|       | 217564P |
|       | 217564B |

| 3.0   | CODE    |
|-------|---------|
| 300mm |         |
|       | 217664W |
|       | 217664L |
|       | 217664G |
|       | 217664P |
|       | 217664B |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 420   | >90 | 3    |
| 3000K        | 440   | >90 | 5    |
| 1800-2850K   | 360   | >95 | 9    |



## RAY 2.0 | 3.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
brushed | incl. 1-phase Global®  
track adapter

0.54 | 0.68kg IP20 36°


| 2.0   | CODE     |
|-------|----------|
| 200mm |          |
|       | 217520W0 |
|       | 217520L0 |
|       | 217520G0 |
|       | 217520P0 |
|       | 217520B0 |

| 3.0   | CODE     |
|-------|----------|
| 300mm |          |
|       | 217620W0 |
|       | 217620L0 |
|       | 217620G0 |
|       | 217620P0 |
|       | 217620B0 |

### OPTIONAL

| PAR16 LED GU10 7W   phase-cut dim | CODE     |
|-----------------------------------|----------|
| 2700K                             | 901228W2 |
| 3000K                             | 901228W4 |
| 1800-2850K                        | 901229S9 |

more lamps and specs on page 701



## HEXO 2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed | incl. 1-phase Global®  
track adapter

0.66 | 0.82kg IP20 36°


| 2.0   | CODE    |
|-------|---------|
| 200mm |         |
|       | 215564G |
|       | 215564Q |
|       | 215564P |
|       | 215564B |

| 3.0   | CODE    |
|-------|---------|
| 300mm |         |
|       | 215664G |
|       | 215664Q |
|       | 215664P |
|       | 215664B |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 420   | >90 | 3    |
| 3000K        | 440   | >90 | 5    |
| 1800-2850K   | 360   | >95 | 9    |

| PAR16 LED GU10 7W   phase-cut dim | CODE     |
|-----------------------------------|----------|
| 2700K                             | 901228W2 |
| 3000K                             | 901228W4 |
| 1800-2850K                        | 901229S9 |

more lamps and specs on page 701



## HEXO 2.0 | 3.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
brushed | incl. 1-phase Global®  
track adapter

0.58 | 0.74kg IP20 36°

| 2.0   | CODE     |
|-------|----------|
| 200mm |          |
|       | 215520G0 |
|       | 215520Q0 |
|       | 215520P0 |
|       | 215520B0 |

| 3.0   | CODE     |
|-------|----------|
| 300mm |          |
|       | 215620G0 |
|       | 215620Q0 |
|       | 215620P0 |
|       | 215620B0 |

### OPTIONAL

| PAR16 LED GU10 7W   phase-cut dim | CODE     |
|-----------------------------------|----------|
| 2700K                             | 901228W2 |
| 3000K                             | 901228W4 |
| 1800-2850K                        | 901229S9 |

more lamps and specs on page 701





# 3-PHASE TRACKS

220-240 VOLT TRACKS | ACCESSORIES

## SURFACE | SUSPENDED EXAMPLES

configuration as seen from top view  
for more support and extended layout of 3-phase tracks,  
please check our FAQ section on [weverducre.com/faq](https://weverducre.com/faq)

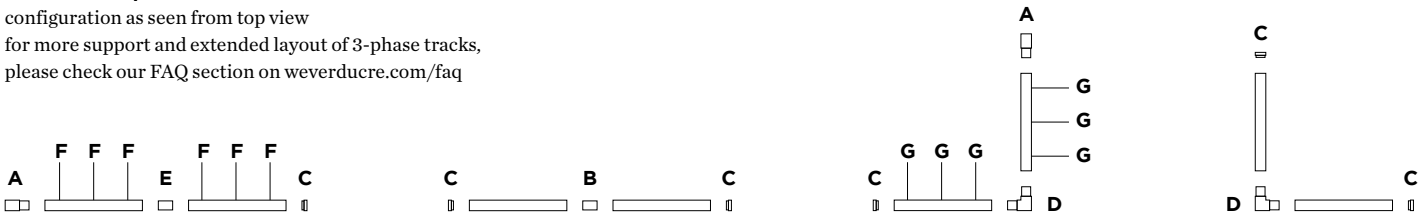

### TRACK PROFILE

surface | suspended | 220-240V | 16A




|                                        | CODE     |
|----------------------------------------|----------|
| <div><div></div><div></div></div> 1.0m | 90014200 |
| <div><div></div><div></div></div> 1.0m | 90014201 |
| <div><div></div><div></div></div> 2.0m | 90014202 |
| <div><div></div><div></div></div> 2.0m | 90014203 |
| <div><div></div><div></div></div> 3.0m | 90014204 |
| <div><div></div><div></div></div> 3.0m | 90014205 |



### F | SUSPENSION SET

complete suspension set  
incl. ceiling fixation bracket

|                                        | CODE     |
|----------------------------------------|----------|
| <div><div></div><div></div></div> 1.5m | 90014206 |
| <div><div></div><div></div></div> 1.5m | 90014207 |
| <div><div></div><div></div></div> 3.0m | 90014208 |
| <div><div></div><div></div></div> 3.0m | 90014209 |
| for 1.0m - 2pcs needed                 |          |
| for 2.0m - 3pcs needed                 |          |
| for 3.0m - 4pcs needed                 |          |



### A | END FEED


including cable gasket  
220-240V | max. 5 x 1.5-2.5mm<sup>2</sup> | 16A

left

|                                   | CODE     |
|-----------------------------------|----------|
| <div><div></div><div></div></div> | 90014238 |
| <div><div></div><div></div></div> | 90014239 |

right


|                                   | CODE     |
|-----------------------------------|----------|
| <div><div></div><div></div></div> | 90014240 |
| <div><div></div><div></div></div> | 90014241 |



### B | MIDDLE FEED

straight  
220-240V | max. 5 x 1.5-2.5mm<sup>2</sup> | 16A

|                                   | CODE     |
|-----------------------------------|----------|
| <div><div></div><div></div></div> | 90014224 |
| <div><div></div><div></div></div> | 90014225 |



### D | L-CONNECTOR

220-240V | max. 5 x 1.5-2.5mm<sup>2</sup> | 16A

left

|                                   | CODE     |
|-----------------------------------|----------|
| <div><div></div><div></div></div> | 90014220 |
| <div><div></div><div></div></div> | 90014221 |

right


|                                   | CODE     |
|-----------------------------------|----------|
| <div><div></div><div></div></div> | 90014222 |
| <div><div></div><div></div></div> | 90014223 |



### C | END CAP LEFT/RIGHT


|                                   | CODE     |
|-----------------------------------|----------|
| <div><div></div><div></div></div> | 90014216 |
| <div><div></div><div></div></div> | 90014217 |

more 3-phase track accessories on  
page 711



### TRACK COVER

|                                        | CODE     |
|----------------------------------------|----------|
| <div><div></div><div></div></div> 1.0m | 90014236 |
| <div><div></div><div></div></div> 1.0m | 90014237 |



### E | STRAIGHT CONNECTOR

straight | 220-240V | 16A

|                                   | CODE     |
|-----------------------------------|----------|
| <div><div></div><div></div></div> | 90014226 |
| <div><div></div><div></div></div> | 90014227 |






# SQUBE on track

3-PHASE



p. 311




## 1.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
incl. 3-phase track adapter

0.32kg IP20 36°

90° 355°

| CODE     |  |
|----------|--|
| 144720W0 |  |
| 144720B0 |  |



## 2.0 LED

LED 12W | 220-240VAC | 50-60Hz  
COB 3-step | phase-cut dim  
aluminium powder coated  
incl. 3-phase track adapter

0.40kg IP20 32°

90° 355°

| CODE    |  |
|---------|--|
| 144364W |  |
| 144364B |  |


| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 710   | >80 | 2    |
| 3000K        | 790   | >80 | 4    |
| 1800-3000K   | 790   | >80 | 9    |

## OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

| CODE       |          |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701



## 3.0 LED

LED 20W | 220-240VAC | 50-60Hz  
COB 3-step | phase-cut dim  
aluminium powder coated  
incl. 3-phase track adapter

0.75kg IP20 27°

90° 355°

| CODE    |  |
|---------|--|
| 144564W |  |
| 144564B |  |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 1300  | >90 | 3    |
| 3000K        | 1390  | >90 | 5    |

## OPTIONAL

dimmer

| CODE         |          |
|--------------|----------|
| for switch   | 90019017 |
| for din rail | 90019018 |

more specs on page 699








BAR BERNARD | MARIE LECLUYSE INTERIEURARCHITECTUUR WATOU | BELGIUM





# SUSPENSIONS on track

3-PHASE



RAY 2.0 | 3.0 LED


LED 6W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed | incl. 3-phase track  
adapter

0.62 | 0.76kg IP20 36°

| 2.0   | CODE    |
|-------|---------|
| 200mm |         |
|       | 217364W |
|       | 217364L |
|       | 217364G |
|       | 217364P |
|       | 217364B |

| 3.0   | CODE    |
|-------|---------|
| 300mm |         |
|       | 217464W |
|       | 217464L |
|       | 217464G |
|       | 217464P |
|       | 217464B |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 420   | >90 | 3    |
| 3000K        | 440   | >90 | 5    |
| 1800-2850K   | 360   | >95 | 9    |



RAY 2.0 | 3.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
brushed | incl. 3-phase track  
adapter

0.54 | 0.68kg IP20 36°


| 2.0   | CODE     |
|-------|----------|
| 200mm |          |
|       | 217320W0 |
|       | 217320L0 |
|       | 217320G0 |
|       | 217320P0 |
|       | 217320B0 |

| 3.0   | CODE     |
|-------|----------|
| 300mm |          |
|       | 217420W0 |
|       | 217420L0 |
|       | 217420G0 |
|       | 217420P0 |
|       | 217420B0 |

## OPTIONAL

| PAR16 LED GU10 7W   phase-cut dim | CODE     |
|-----------------------------------|----------|
| 2700K                             | 901228W2 |
| 3000K                             | 901228W4 |
| 1800-2850K                        | 901229S9 |

more lamps and specs on page 701



HEXO 2.0 | 3.0 LED


LED 6W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed | incl. 3-phase track  
adapter

0.66 | 0.82kg IP20 36°

| 2.0   | CODE    |
|-------|---------|
| 200mm |         |
|       | 215364G |
|       | 215364Q |
|       | 215364P |
|       | 215364B |

| 3.0   | CODE    |
|-------|---------|
| 300mm |         |
|       | 215464G |
|       | 215464Q |
|       | 215464P |
|       | 215464B |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 420   | >90 | 3    |
| 3000K        | 440   | >90 | 5    |
| 1800-2850K   | 360   | >95 | 9    |



HEXO 2.0 | 3.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
brushed | incl. 3-phase track  
adapter

0.58 | 0.74kg IP20 36°

| 2.0   | CODE     |
|-------|----------|
| 200mm |          |
|       | 215320G0 |
|       | 215320Q0 |
|       | 215320P0 |
|       | 215320B0 |



| 3.0   | CODE     |
|-------|----------|
| 300mm |          |
|       | 215420G0 |
|       | 215420Q0 |
|       | 215420P0 |
|       | 215420B0 |

## OPTIONAL

| PAR16 LED GU10 7W   phase-cut dim | CODE     |
|-----------------------------------|----------|
| 2700K                             | 901228W2 |
| 3000K                             | 901228W4 |
| 1800-2850K                        | 901229S9 |

more lamps and specs on page 701



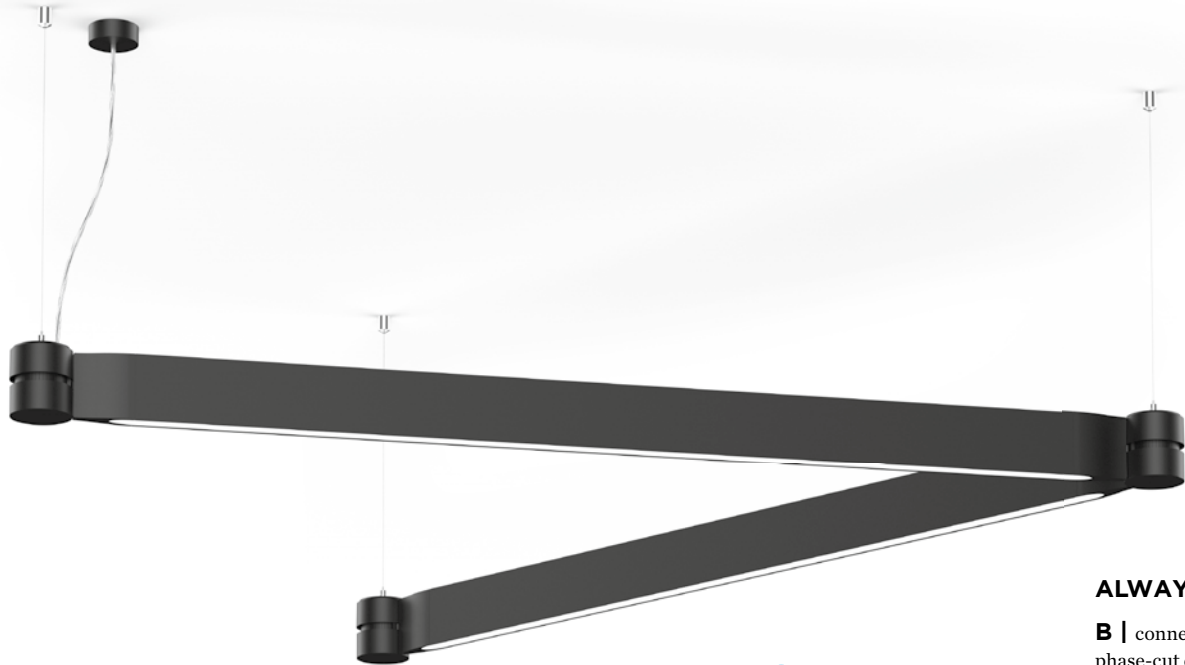

**A | 1.0**

LED LED 18W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS  
aluminium powder coated  
opal PMMA cover

1.70kg IP20 0.3 P

phase-cut dim | 3000K | >90 CRI | 981lm  
CODE

500184W5  
500184B5

DALI dim | 3000K | >90 CRI | 981lm  
CODE

500185W5  
500185B5

**ALWAYS USE**

**B** | connector point  
phase-cut dim up to max. 4 fixtures  
DALI dim up to max. 2 fixtures

|  | CODE     |
|--|----------|
|  | 900190W1 |
|  | 900190B1 |

**OPTIONAL**

**C** | steel suspension cable

|      | CODE     |
|------|----------|
| 2.0m | 90015102 |

**D1** | power feeder for phase-cut dim  
incl. steel suspension cable 2.0m  
max. 10 luminaires per power feeder


|  | CODE     |
|--|----------|
|  | 90018010 |
|  | 90018011 |

**D2** | power feeder for DALI 2.0m  
incl. steel suspension cable 2.0m  
max. 10 luminaires per power feeder

|  | CODE     |
|--|----------|
|  | 90018012 |
|  | 90018013 |


**SURFACE EXAMPLES**

configuration as seen from top view | minimum angle 45°  
for more support and extended layout of ELLO SYSTEM,  
please check our FAQ section on [weverducre.com/faq](https://weverducre.com/faq)

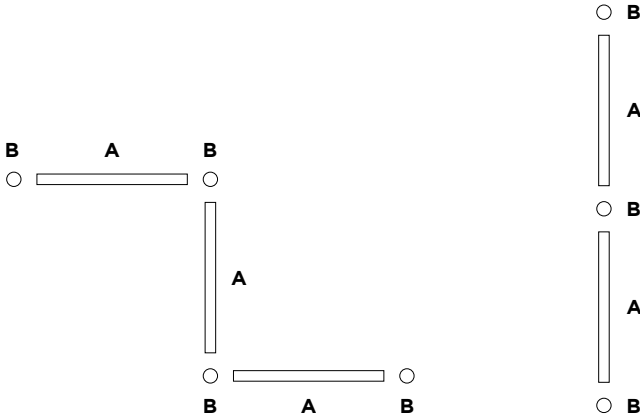

**SUSPENDED EXAMPLES**

configuration as seen from top view | minimum angle 45°  
can be used up or down (direct or indirect), for more support and extended  
layout of ELLO SYSTEM, please check our FAQ section on [weverducre.com/faq](https://weverducre.com/faq)

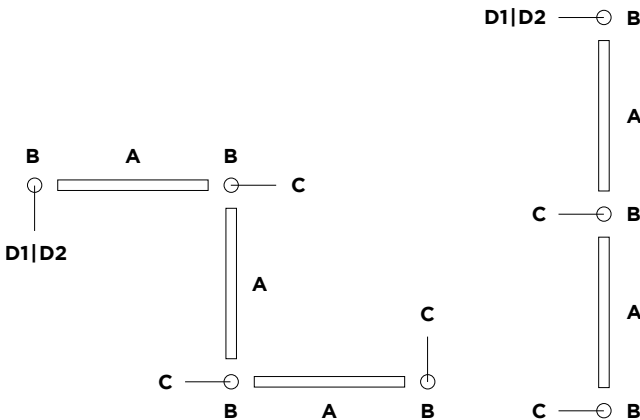

# ELLO SYSTEM

CEILING SURFACE | SUSPENDED





p. 437



As awarded by The Chicago Athenaeum:  
Museum of Architecture and Design

DESIGNED BY  
S&R CORNELISSEN

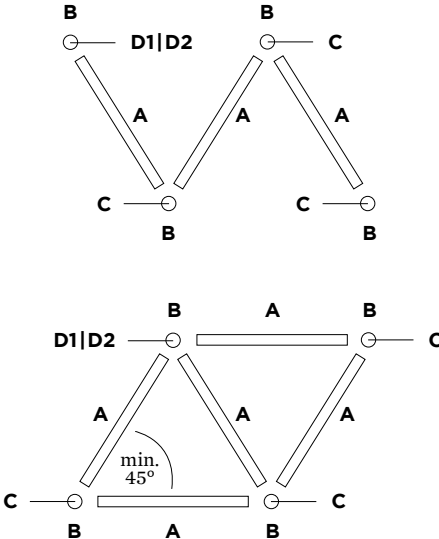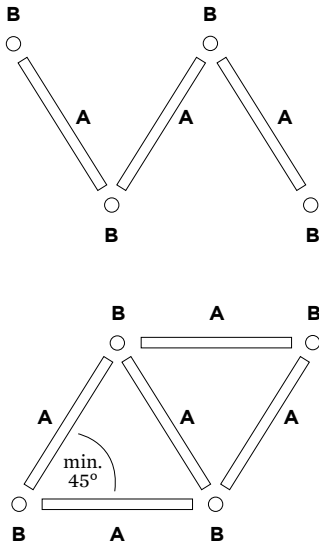



OFFICE KR PROPERTIES | H2A ARCHITECTURAL GROUP | K2 LIGHT ARCHITECTURE MOSCOW | RUSSIA



OFFICE WESTERNACHER SOLUTIONS AG | JENNIFER BÜHLING DESIGNFUNKTION BERLIN | GERMANY



## CEILING SUSPENDED SINGLE



**ODREY**  
p. 387



**BOX**  
p. 393



**DOCUS**  
p. 395



**HEXO**  
p. 397



**RAY**  
p. 401



**SHIEK 1.0**  
p. 403



**SHIEK 3.0**  
p. 405



**SHIEK 4.0**  
p. 407



**WETRO**  
p. 411



**SELO**  
p. 417



**DINOR 1.0**  
p. 421



**DINOR 2.0**  
p. 421



**DINOR 3.0**  
p. 421



**CORK**  
p. 423



**CONE**  
p. 427




**BISHOP**  
p. 429



**ELLO**  
p. 437



**DARF**  
p. 439



**VENN**  
p. 441



**BEBOW**  
p. 443



**GIGANT**  
p. 447



**CYCLONE**  
p. 451

## CEILING SUSPENDED MULTI



**BOX MULTI**  
p. 457




**DOCUS MULTI**  
p. 459



**HEXO MULTI**  
p. 461



**RAY MULTI**  
p. 463



**WETRO MULTI**  
p. 465



**SHIEK MULTI**  
p. 467



**CORK MULTI**  
p. 471

## DESIGNER FAMILIES



**ROOMOR**  
p. 37



**WIRO**  
p. 93



**MIRRO**  
p. 55



**DRO**  
p. 67



**ROCK**  
p. 81



**REVER**  
p. 131



**J.J.W.**  
p. 153

# CEILING SUSPENDED

p. 385 — 471

# LOOK WHO CAME TO DINNER

ODREY ON THE CEILING



Looking for a surprise guest for your dinner party? Let ODREY shine from the ceiling. After all, the elegant luminaire is fantastic with its eight different shade shapes and two variable inner covers. Don't be surprised if your guests frequently look up at the ceiling. It's hard to resist the temptation when the elegant ODREY winks from its black or gold shade. By the way, if you really want something unique, choose a mounting in a contrasting colour. You can choose between black or gold.

Sie suchen nach einem Überraschungsgast für Ihre Dinner-party? Dann lassen Sie doch einfach ODREY von der Decke strahlen. Schließlich beeindruckt die elegante Leuchte nicht nur mit acht verschiedenen Schirmformen, sondern auch mit zwei variablen Innencover. Wundern Sie sich also nicht, wenn Ihre Gäste öfter mal nach oben sehen. Wenn die elegante ODREY mit einem Shade in Gold oder Schwarz von der Decke blinzelt, kann man dieser Versuchung kaum widerstehen. Übrigens: Wer's noch individueller mag, kann das Mounting in einer Kontrastfarbe wählen. Zur Auswahl stehen schwarz oder gold.

# CREATE YOUR VERY OWN ODREY

MOUNTING + SHADE + INNER COVER

## MOUNTING

available in ● black or ● gold



## SHADES

available in ● black or ● gold



1.0  
ø55



2.0  
ø250




3.0  
ø100




4.0  
ø124




5.0  
ø115



6.0  
ø190



7.0  
ø150



8.0  
ø250




## OPTIONAL INNER COVERS

available in ● black or ● gold



2.0



1.0





1.0



1.0



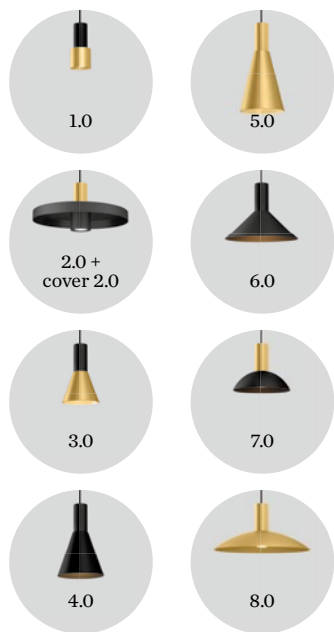

### OPTIONAL

inner cover 1.0

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 911420G0 |
|  | 911420B0 |

suitable for shades 6.0 | 7.0 | 8.0

inner cover 2.0

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 911430G0 |
|  | 911430B0 |

suitable for shade 2.0

available from summer 2020

### 1.0

LED PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium wet painted

0.22kg IP20 0.3m

|                                                                                     | CODE     |
|-------------------------------------------------------------------------------------|----------|
|  | 257120G0 |
|  | 257120B0 |

### ALWAYS USE

shade 1.0 - 8.0 in gold

|                                                                                       | CODE         |
|---------------------------------------------------------------------------------------|--------------|
|    | 1.0 911421G1 |
|   | 2.0 911422G1 |
|  | 3.0 911423G1 |
|  | 4.0 911424G1 |
|  | 5.0 911425G1 |
|  | 6.0 911426G1 |
|  | 7.0 911427G1 |
|  | 8.0 911428G1 |

shade 1.0 - 8.0 in black

|                                                                                       | CODE         |
|---------------------------------------------------------------------------------------|--------------|
|  | 1.0 911421B1 |
|  | 2.0 911422B1 |
|  | 3.0 911423B1 |
|  | 4.0 911424B1 |
|  | 5.0 911425B1 |
|  | 6.0 911426B1 |
|  | 7.0 911427B1 |
|  | 8.0 911428B1 |

### ALWAYS USE

Single suspension  
ceiling base round

|                                                                                     | CODE     |
|-------------------------------------------------------------------------------------|----------|
|  | 90052022 |
|  | 90052021 |

Invisible ceiling suspension  
plasterkit | system - with fixation  
and adjustment

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 90015195 |

Single ceiling base semi recessed

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 90052026 |
|  | 90052027 |

### OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

|            | CODE     |
|------------|----------|
| 2700K      | 901228B3 |
| 3000K      | 901228B5 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701


# ODREY

## CEILING SUSPENDED



p. 353  
p. 365


p. 491









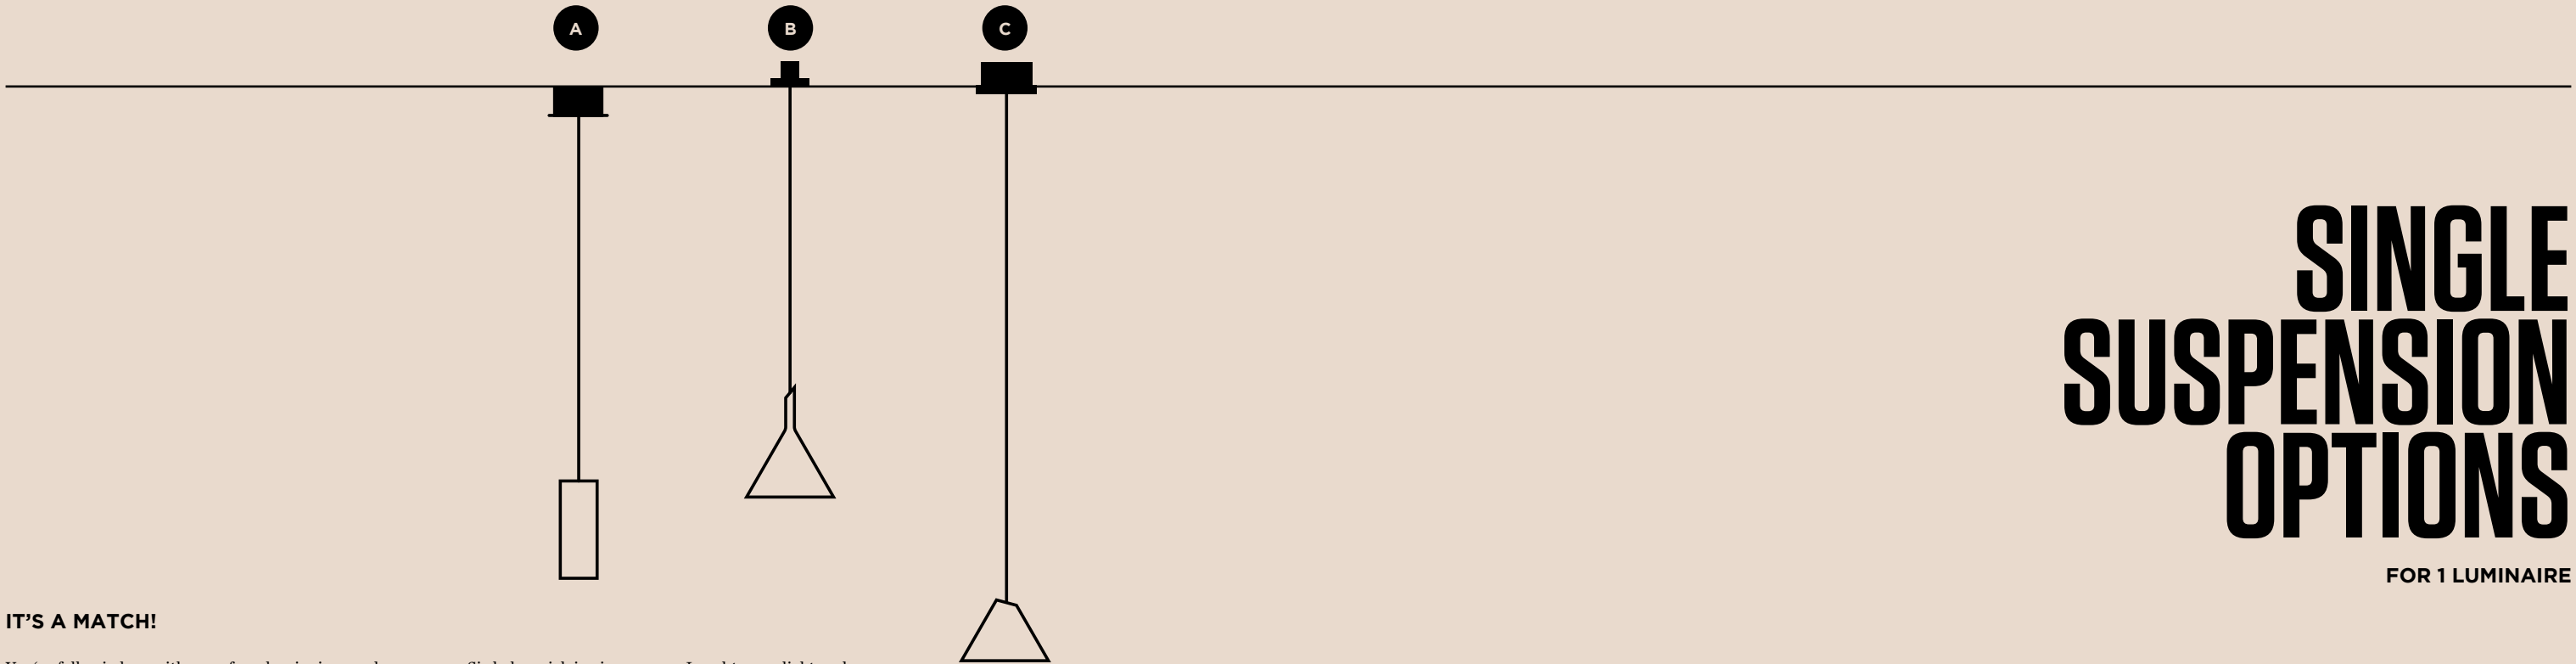





IT’S A MATCH!

You’ve fallen in love with one of our luminaires, and now you’re looking for the right ceiling rose? Let’s quickly play matchmaker here. You have three basic options. The first is the classic ceiling-base round. Alternatively, choose the timeless ceiling-mounted version or the more subtle invisible, where the installed ceiling rose disappears into the plaster ceiling. Rounding off the selection is the semi-recessed version, where the ceiling rose can also be hidden in the ceiling but with a cover that can always be opened for maintenance. Did you find a match? All you need to do now is pick the right colour.

Sie haben sich in eine unserer Leuchten verliebt und suchen jetzt nach dem passenden Baldachin? Dann spielen wir hier mal kurz die Vermittlungsbörse. Grundsätzlich können Sie zwischen drei Möglichkeiten wählen: Der Ceiling-base-round, die klassische Deckenaufbauvariante, der superdezenten invisible-Version, bei der man den Baldachin in der Gipsdecke einbaut und der damit unsichtbar wird und der Semi-recessed-Variante, die den Baldachin auch in der Decke verschwinden lässt, man aber zu Wartungszwecken die Abdeckung jederzeit öffnen kann. Na, ein Match gefunden? Dann müssen Sie sich jetzt nur noch für die passende Farbe entscheiden.

|       |        |
|-------|--------|
| BOX   | p. 393 |
| DOCUS | p. 395 |
| HEXO  | p. 397 |
| RAY   | p. 401 |
| SHIEK | p. 403 |
| WETRO | p. 411 |
| SELO  | p. 417 |
| DINOR | p. 421 |

multi suspension options on page 455



SINGLE SUSPENSION  
ceiling base round

|  |          |
|--|----------|
|  | CODE     |
|  | 90052022 |
|  | 90052021 |


more information on page 713



INVISIBLE CEILING  
SUSPENSION  
plasterkit | system - with fixation  
and adjustment

|  |          |
|--|----------|
|  | CODE     |
|  | 90015195 |

more information on page 713





SINGLE CEILING BASE  
semi recessed

|  |          |
|--|----------|
|  | CODE     |
|  | 90052026 |
|  | 90052027 |

more information on page 713



GAPSITE HOTEL | KADLETZ ARCHITEKTUR GRAZ | AUSTRIA



2.0 | 3.0 LED


LED 6W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.66 | 0.83kg IP20 36°

| 2.0 | 200mm | CODE     |
|-----|-------|----------|
|     |       | 214164W_ |
|     |       | 214164L_ |
|     |       | 214164P_ |
|     |       | 214164B_ |

| 3.0 | 300mm | CODE     |
|-----|-------|----------|
|     |       | 214264W_ |
|     |       | 214264L_ |
|     |       | 214264P_ |
|     |       | 214264B_ |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 420   >90   | 3    |
| 3000K        | 440   >90   | 5    |
| 1800-2850K   | 360   >95   | 9    |



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.59 | 0.76kg IP20

| 2.0 | 200mm | CODE     |
|-----|-------|----------|
|     |       | 214120W0 |
|     |       | 214120L0 |
|     |       | 214120P0 |
|     |       | 214120B0 |

| 3.0 | 300mm | CODE     |
|-----|-------|----------|
|     |       | 214220W0 |
|     |       | 214220L0 |
|     |       | 214220P0 |
|     |       | 214220B0 |


OPTIONAL

| PAR16 LED GU10 7W   phase-cut dim | CODE     |
|-----------------------------------|----------|
| 2700K                             | 901228W2 |
| 3000K                             | 901228W4 |
| 1800-2850K                        | 901229S9 |

more lamps and specs on page 701

BOX

CEILING SUSPENDED



ALWAYS USE

A | Single suspension  
ceiling base round

|  | CODE     |
|--|----------|
|  | 90052022 |
|  | 90052021 |

B | Invisible ceiling suspension  
plasterkit | system - with fixation  
and adjustment

|  | CODE     |
|--|----------|
|  | 90015195 |

C | Single ceiling base semi recessed


|  | CODE     |
|--|----------|
|  | 90052026 |
|  | 90052027 |

multi suspension options on page 455







SHOP | ZANOTTI PANE DOLCE E CAFFÈ | FLUSSOCREATIVO DESIGN STUDIO TRAVAGLIATO | ITALY




A



B



C



2.0 | 3.0 LED


LED 6W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.66 | 0.82kg IP20 36°

| 2.0 | 200mm | CODE    |
|-----|-------|---------|
|     |       | 216164W |
|     |       | 216164G |
|     |       | 216164P |
|     |       | 216164B |

| 3.0 | 300mm | CODE    |
|-----|-------|---------|
|     |       | 216264W |
|     |       | 216264L |
|     |       | 216264G |
|     |       | 216264P |
|     |       | 216264B |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 420   >90   | 3    |
| 3000K        | 440   >90   | 5    |
| 1800-2850K   | 360   >95   | 9    |



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.59 | 0.72kg IP20

| 2.0 | 200mm | CODE     |
|-----|-------|----------|
|     |       | 216120W0 |
|     |       | 216120G0 |
|     |       | 216120P0 |
|     |       | 216120B0 |

| 3.0 | 300mm | CODE     |
|-----|-------|----------|
|     |       | 216220W0 |
|     |       | 216220L0 |
|     |       | 216220G0 |
|     |       | 216220P0 |
|     |       | 216220B0 |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 420   >90   | 3    |
| 3000K        | 440   >90   | 5    |
| 1800-2850K   | 360   >95   | 9    |

PAR16 LED GU10 7W | phase-cut dim

| 2700K      | 901228W2 |
|------------|----------|
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701

DOCUS

CEILING SUSPENDED



p. 281

ALWAYS USE

A | Single suspension  
ceiling base round

|  | CODE     |
|--|----------|
|  | 90052022 |
|  | 90052021 |

B | Invisible ceiling suspension  
plasterkit | system - with fixation  
and adjustment





|  | CODE     |
|--|----------|
|  | 90015195 |

C | Single ceiling base semi recessed

|  | CODE     |
|--|----------|
|  | 90052026 |
|  | 90052027 |

multi suspension options on page 455





### 2.0 | 3.0 LED


LED 6W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.66 | 0.82kg IP20 36°

| 2.0 | 200mm | CODE    |
|-----|-------|---------|
|     |       | 215164G |
|     |       | 215164Q |
|     |       | 215164P |
|     |       | 215164B |

| 3.0 | 300mm | CODE    |
|-----|-------|---------|
|     |       | 215264G |
|     |       | 215264Q |
|     |       | 215264P |
|     |       | 215264B |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 420   >90   | 3    |
| 3000K        | 440   >90   | 5    |
| 1800-2850K   | 360   >95   | 9    |



### 2.0 | 3.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.58 | 0.74kg IP20 36°

| 2.0 | 200mm | CODE     |
|-----|-------|----------|
|     |       | 215120G0 |
|     |       | 215120Q0 |
|     |       | 215120P0 |
|     |       | 215120B0 |

| 3.0 | 300mm | CODE     |
|-----|-------|----------|
|     |       | 215220G0 |
|     |       | 215220Q0 |
|     |       | 215220P0 |
|     |       | 215220B0 |

### OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

|            | CODE     |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701

# HEXO

## CEILING SUSPENDED



p. 285



p. 367



p. 377

### ALWAYS USE

A | Single suspension  
ceiling base round

|  | CODE     |
|--|----------|
|  | 90052022 |
|  | 90052021 |

B | Invisible ceiling suspension  
plasterkit | system - with fixation  
and adjustment

|  | CODE     |
|--|----------|
|  | 90015195 |

C | Single ceiling base semi recessed






|  | CODE     |
|--|----------|
|  | 90052026 |
|  | 90052027 |

multi suspension options on page 455







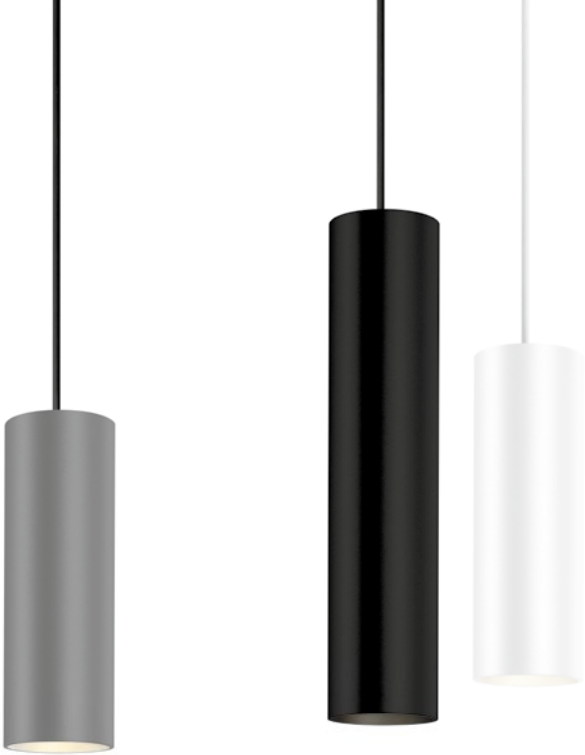

2.0 | 3.0 LED



LED 6W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.62 | 0.76kg IP20 0.3 36°

| 2.0   | CODE     |
|-------|----------|
| 200mm |          |
|       | 217164W_ |
|       | 217164L_ |
|       | 217164G_ |
|       | 217164P_ |
|       | 217164B_ |

| 3.0   | CODE     |
|-------|----------|
| 300mm |          |
|       | 217264W_ |
|       | 217264L_ |
|       | 217264G_ |
|       | 217264P_ |
|       | 217264B_ |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 420   >90   | 3    |
| 3000K        | 440   >90   | 5    |
| 1800-2850K   | 360   >95   | 9    |



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.54 | 0.68kg IP20 0.3

| 2.0   | CODE     |
|-------|----------|
| 200mm |          |
|       | 217120W0 |
|       | 217120L0 |
|       | 217120G0 |
|       | 217120P0 |
|       | 217120B0 |

| 3.0   | CODE     |
|-------|----------|
| 300mm |          |
|       | 217220W0 |
|       | 217220L0 |
|       | 217220G0 |
|       | 217220P0 |
|       | 217220B0 |

OPTIONAL

| PAR16 LED GU10 7W   phase-cut dim | CODE     |
|-----------------------------------|----------|
| 2700K                             | 901228W2 |
| 3000K                             | 901228W4 |
| 1800-2850K                        | 901229S9 |

more lamps and specs on page 701

ALWAYS USE

A | Single suspension  
ceiling base round

|  | CODE     |
|--|----------|
|  | 90052022 |
|  | 90052021 |

B | Invisible ceiling suspension  
plasterkit | system - with fixation  
and adjustment

|  | CODE     |
|--|----------|
|  | 90015195 |

C | Single ceiling base semi recessed

|  | CODE     |
|--|----------|
|  | 90052026 |
|  | 90052027 |

multi suspension options on page 455










PRIVATE RESIDENCE | EVA CARLIER INTERIOR DESIGN BELGIUM

SHIEK  
CEILING SUSPENDED

DESIGNED BY  
3HDRAFT



**1.0 LED**  
LED 11W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim | aluminium  
powder coated | lacquered  
incl. 1x strain relief and hook

0.36 kg IP20  $\approx 0.3 \times D$

|  |          |
|--|----------|
|  | CODE     |
|  | 237189W9 |
|  | 237189J9 |
|  | 237189P9 |
|  | 237189K9 |
|  | 237189Z9 |

**2.0 LED**  
LED 11W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim | aluminium  
powder coated | lacquered  
incl. 1x strain relief and hook

0.47 kg IP20  $\approx 0.3 \times D$

|  |          |
|--|----------|
|  | CODE     |
|  | 237289W9 |
|  | 237289J9 |
|  | 237289P9 |
|  | 237289K9 |
|  | 237289Z9 |

ALWAYS USE

**A | Single suspension**  
ceiling base round

|  |          |
|--|----------|
|  | CODE     |
|  | 90052022 |
|  | 90052021 |






**B | Invisible ceiling suspension**  
plasterkit | system - with fixation  
and adjustment

|  |          |
|--|----------|
|  | CODE     |
|  | 90015195 |

**C | Single ceiling base semi recessed**

|  |          |
|--|----------|
|  | CODE     |
|  | 90052026 |
|  | 90052027 |

multi suspension options on page 455



### 3.0 LED

LED 11W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim | aluminium  
powder coated | lacquered  
incl. 1x strain relief and hook

0.60 kg IP20  $\approx 0.3^\circ$

1800-2850K | >90 CRI | 510lm

|  | CODE     |
|--|----------|
|  | 237389W9 |
|  | 237389J9 |
|  | 237389P9 |
|  | 237389K9 |
|  | 237389Z9 |

### 3.0 E27

E27 max. 20W | E27 | A60  
100-240VAC | 50-60Hz  
aluminium powder coated  
lacquered | incl. 1x strain relief  
and hook

0.60 kg IP20  $\approx 0.3^\circ$

|  | CODE     |
|--|----------|
|  | 2343E8W0 |
|  | 2343E8J0 |
|  | 2343E8P0 |
|  | 2343E8K0 |
|  | 2343E8Z0 |

# SHIEK

CEILING SUSPENDED



reddot award 2017  
winner



DESIGN  
AWARD  
2017



As awarded by The Chicago Athenaeum:  
Museum of Architecture and Design

DESIGNED BY  
3HDRAFT

### ALWAYS USE

**A | Single suspension**  
ceiling base round

|  | CODE     |
|--|----------|
|  | 90052022 |
|  | 90052021 |

**B | Invisible ceiling suspension**  
plasterkit | system - with fixation  
and adjustment

|  | CODE     |
|--|----------|
|  | 90015195 |

**C | Single ceiling base semi recessed**

|  | CODE     |
|--|----------|
|  | 90052026 |
|  | 90052027 |

multi suspension options on page 455








# SHIEK

CEILING SUSPENDED

DESIGNED BY  
3HDRAFT



## 4.0 LED

LED 11W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim | aluminium  
powder coated | lacquered  
incl. 1x strain relief and hook

0.70 kg IP20  $\approx 0.3^\circ$

1800-2850K | >90 CRI | 510lm

|  | CODE     |
|--|----------|
|  | 237489W9 |
|  | 237489J9 |
|  | 237489P9 |
|  | 237489K9 |
|  | 237489Z9 |

## 4.0 E27

E27 max. 20W | E27 | A60  
100-240VAC | 50-60Hz  
aluminium powder coated  
lacquered | incl. 1x strain relief  
and hook

0.70 kg IP20  $\approx 0.3^\circ$

|  | CODE     |
|--|----------|
|  | 2344E8W0 |
|  | 2344E8J0 |
|  | 2344E8P0 |
|  | 2344E8K0 |
|  | 2344E8Z0 |

## ALWAYS USE

**A | Single suspension**  
ceiling base round

|  | CODE     |
|--|----------|
|  | 90052022 |
|  | 90052021 |

**B | Invisible ceiling suspension**  
plasterkit | system - with fixation  
and adjustment

|  | CODE     |
|--|----------|
|  | 90015195 |

**C | Single ceiling base semi recessed**






|  | CODE     |
|--|----------|
|  | 90052026 |
|  | 90052027 |

multi suspension options on page 455





PRIVATE RESIDENCE OBUMEX – STEENOVEN BELGIUM



**5.0 LED**  
LED 11W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim | aluminium  
powder coated | lacquered  
incl. 1x strain relief and hook

0.80 kg IP20 0.3

1800-2850K | >90 CRI | 510lm

|  | CODE     |
|--|----------|
|  | 237589W9 |
|  | 237589J9 |
|  | 237589P9 |
|  | 237589K9 |
|  | 237589Z9 |

**5.0 E27**  
E27 max. 20W | E27 | A60  
100-240VAC | 50-60Hz  
aluminium powder coated  
lacquered | incl. 1x strain relief  
and hook

0.80 kg IP20 0.3

|  | CODE     |
|--|----------|
|  | 2345E8W0 |
|  | 2345E8J0 |
|  | 2345E8P0 |
|  | 2345E8K0 |
|  | 2345E8Z0 |

ALWAYS USE

**A | Single suspension**  
ceiling base round

|  | CODE     |
|--|----------|
|  | 90052022 |
|  | 90052021 |

**B | Invisible ceiling suspension**  
plasterkit | system - with fixation  
and adjustment

|  | CODE     |
|--|----------|
|  | 90015195 |

**C | Single ceiling base** semi recessed

|  | CODE     |
|--|----------|
|  | 90052026 |
|  | 90052027 |

multi suspension options on page 455



SHIEK  
CEILING SUSPENDED

DESIGNED BY  
3HDRAFT





FASHION STORE 'T KAPELLEKE | BOSSUYT SHOP INTERIORS DEERLIJK | BELGIUM




### 1.0

LED 11W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker | phase-cut  
dim | artisanal hand blown glass

0.56 kg IP20 0.3 6

1800-2850K | >90 CRI | 340lm

|  |          |
|--|----------|
|  | CODE     |
|  | 236189P9 |
|  | 236189B9 |




### 2.0

LED 11W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker | phase-cut  
dim | artisanal hand blown glass

0.97 kg IP20 0.3 6

1800-2850K | >90 CRI | 340lm

|  |          |
|--|----------|
|  | CODE     |
|  | 236289P9 |
|  | 236289B9 |



### 3.0

LED 11W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker | phase-cut  
dim | artisanal hand blown glass

1.69 kg IP20 0.3 6

1800-2850K | >90 CRI | 340lm

|  |          |
|--|----------|
|  | CODE     |
|  | 236389P9 |
|  | 236389B9 |

## ALWAYS USE

**A | Single suspension**  
ceiling base round

|  |          |
|--|----------|
|  | CODE     |
|  | 90052022 |
|  | 90052021 |

**B | Invisible ceiling suspension**  
plasterkit | system - with fixation  
and adjustment

|  |          |
|--|----------|
|  | CODE     |
|  | 90015195 |

**C | Single ceiling base** semi recessed

|  |          |
|--|----------|
|  | CODE     |
|  | 90052026 |
|  | 90052027 |

multi suspension options on page 455

# WETRO

CEILING SUSPENDED




As awarded by The Chicago Athenaeum:  
Museum of Architecture and Design

DESIGNED BY  
3HDRAFT



BAR OSLO | NORWAY




available from spring 2020



WETRO  
CEILING SUSPENDED

DESIGNED BY  
3HDRAFT




1.0

LED 11W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker | phase-cut  
dim | italian hand blown glass

0.56 kg IP20  $\pm 0.3^\circ$  6

1800-2850K | >90 CRI | 340lm

|  | CODE      |
|--|-----------|
|  | 236189TS9 |
|  | 236189TD9 |
|  | 236189TW9 |




2.0

LED 11W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker | phase-cut  
dim | italian hand blown glass

0.97 kg IP20  $\pm 0.3^\circ$  6

1800-2850K | >90 CRI | 340lm

|  | CODE      |
|--|-----------|
|  | 236289TS9 |
|  | 236289TD9 |
|  | 236289TW9 |



3.0

LED 11W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker | phase-cut  
dim | artisanal hand blown glass

1.69 kg IP20  $\pm 0.3^\circ$  6

1800-2850K | >90 CRI | 340lm

|  | CODE      |
|--|-----------|
|  | 236389TS9 |
|  | 236389TD9 |
|  | 236389TW9 |

ALWAYS USE

A | Single suspension  
ceiling base round

|  | CODE     |
|--|----------|
|  | 90052022 |
|  | 90052021 |

B | Invisible ceiling suspension  
plasterkit | system - with fixation  
and adjustment

|  | CODE     |
|--|----------|
|  | 90015195 |

C | Single ceiling base semi recessed

|  | CODE     |
|--|----------|
|  | 90052026 |
|  | 90052027 |

multi suspension options on page 455







TAUPE WHITE GLASS  
ON

TAUPE WHITE GLASS  
OFF

Italian hand blown glass




1.0

LED 11W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
incl. PS | phase-cut dim  
porcelain

0.80 kg IP20  $\approx 0.3^\circ$

1800-2850K | >90 CRI | 510lm

CODE  
235189W9




2.0

LED 11W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
incl. PS | phase-cut dim  
porcelain

0.96 kg IP20  $\approx 0.3^\circ$

1800-2850K | >90 CRI | 510lm

CODE  
235289W9



3.0

LED 11W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
incl. PS | phase-cut dim  
porcelain

0.80 kg IP20  $\approx 0.3^\circ$

1800-2850K | >90 CRI | 510lm

CODE  
235389W9

ALWAYS USE

A | Single suspension  
ceiling base round

CODE  
90052022  
90052021

B | Invisible ceiling suspension  
plasterkit | system - with fixation  
and adjustment

CODE  
90015195

C | Single ceiling base semi recessed

CODE  
90052026  
90052027

SELO  
CEILING SUSPENDED











COFFEE SHOP COLOGNE | GERMANY

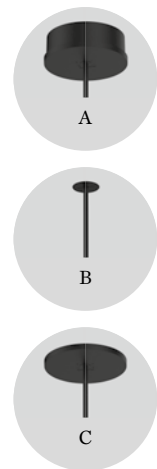

DINOR  
CEILING SUSPENDED  
DESIGNED BY  
3HDRAFT




1.0

LED 11W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim  
aluminium wet painted

0.90 kg IP20

1800-2850K | >90 CRI | 510lm

| CODE |           |
|------|-----------|
|      | 255189RW9 |
|      | 255189GW9 |
|      | 255189OK9 |
|      | 255189OB9 |




2.0

LED 11W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim  
aluminium wet painted

1.30 kg IP20

1800-2850K | >90 CRI | 510lm

| CODE |           |
|------|-----------|
|      | 255289RW9 |
|      | 255289GW9 |
|      | 255289OK9 |
|      | 255289OB9 |



3.0

LED 11W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim  
aluminium wet painted

2.30 kg IP20

1800-2850K | >90 CRI | 510lm

| CODE |           |
|------|-----------|
|      | 255389RW9 |
|      | 255389GW9 |
|      | 255389OK9 |
|      | 255389OB9 |

### ALWAYS USE

**A | Single suspension**  
ceiling base round

| CODE |          |
|------|----------|
|      | 90052022 |
|      | 90052021 |

**B | Invisible ceiling suspension**  
plasterkit | system - with fixation  
and adjustment

| CODE |          |
|------|----------|
|      | 90015195 |

**C | Single ceiling base semi recessed**

| CODE |          |
|------|----------|
|      | 90052026 |
|      | 90052027 |






RESTAURANT GUST | INTERIOR DESIGN FREDERIC HOOFT KORTRIJK | BELGIUM



# CORK

CEILING SUSPENDED



1.0

LED 3W | 120-240VAC | 50-60Hz  
PCB 3-step | incl. power supply  
aluminium powder coated  
fits bottles inner ø16,5 - 19,5 mm  
and max. 1kg

0.24kg IP20 0.3m 36°

| CODE        |         |
|-------------|---------|
| <div></div> | 210163W |
| <div></div> | 210163B |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2200K        | 120   >80   | 1    |
| 2700K        | 180   >80   | 2    |

## OPTIONAL

| CODE                                 |          |
|--------------------------------------|----------|
| bottle 1                             |          |
| 75/174   glass                       | 90019013 |
| bottle 2                             |          |
| 87/323   glass                       | 90019014 |
| multi suspension options on page 455 |          |





MAGAZIN AUF EF HERTEN | GERMANY




RESTAURANT LE NOIR BONNET | AXIOME ARCHITECTURE SIRAUT | BELGIUM






HOTEL LILLA ROBERTS | PUROPLAN OY & TECLUX OY HELSINKI | FINLAND

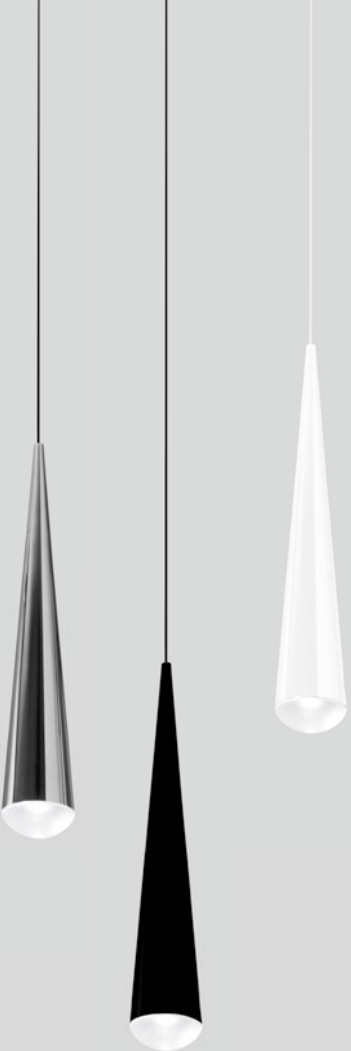

# CONE

CEILING SUSPENDED



1.0

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | phase-cut dim  
aluminium powder coated  
chrome plated | glass


0.55kg | IP20 | 0.3m | 36°

2700K | >90 CRI | 480lm

| CODE                                                                                  |          |
|---------------------------------------------------------------------------------------|----------|
|  | 200184W2 |
|  | 200184C2 |
|  | 200184B2 |



PRIVATE RESIDENCE AUSTRIA



4.0

E27 max. 25W | 220-240VAC  
50-60Hz | composite | wet painted

1.08kg IP20 0.3

shade only

|  | CODE     |
|--|----------|
|  | 218100SY |
|  | 218100GR |
|  | 218100GG |

OPTIONAL

A60 LED E27 6W dim

|               | CODE     |
|---------------|----------|
| 2200K   315lm | 9003E109 |
| 2700K   500lm | 9003E138 |


G95 LED E27 6W dim

|               |          |
|---------------|----------|
| 2200K   450lm | 9003E111 |
|---------------|----------|

G95 LED E27 12W opal

|                |          |
|----------------|----------|
| 2700K   1000lm | 9003E154 |
|----------------|----------|

more lamps and specs on page 703



6.0

E27 max. 25W | 220-240VAC  
50-60Hz | composite | wet painted

2.62kg IP20 0.3

shade only

|  | CODE     |
|--|----------|
|  | 218200SY |
|  | 218200GR |
|  | 218200GG |

OPTIONAL

A60 LED E27 6W dim

|               | CODE     |
|---------------|----------|
| 2200K   315lm | 9003E109 |
| 2700K   500lm | 9003E138 |


G95 LED E27 6W dim

|               |          |
|---------------|----------|
| 2200K   450lm | 9003E111 |
|---------------|----------|

G95 LED E27 12W opal

|                |          |
|----------------|----------|
| 2700K   1000lm | 9003E154 |
|----------------|----------|

more lamps and specs on page 703



8.0

E27 max. 25W | 220-240VAC  
50-60Hz | composite | wet painted

5.70kg IP20 0.3

shade only

|  | CODE     |
|--|----------|
|  | 218300SY |
|  | 218300GR |
|  | 218300GG |

OPTIONAL

A60 LED E27 6W dim

|               | CODE     |
|---------------|----------|
| 2200K   315lm | 9003E109 |
| 2700K   500lm | 9003E138 |

G95 LED E27 6W dim

|               |          |
|---------------|----------|
| 2200K   450lm | 9003E111 |
|---------------|----------|

G95 LED E27 12W opal

|                |          |
|----------------|----------|
| 2700K   1000lm | 9003E154 |
|----------------|----------|

more lamps and specs on page 703



ALWAYS USE

4.0 | 6.0

cable suspension set | 2.0m cable

|  | CODE     |
|--|----------|
|  | 90015120 |
|  | 90015138 |
|  | 90015134 |
|  | 90015119 |

8.0

cable suspension set | 2.0m cable

|  | CODE     |
|--|----------|
|  | 90015123 |
|  | 90015139 |
|  | 90015135 |
|  | 90015122 |

6.0m suspension set on page 712

BISHOP

CEILING SUSPENDED



reddot award 2015  
honourable mention



As awarded by The Chicago Athenaeum:  
Museum of Architecture and Design

DESIGNED BY  
3HDRAFT










PRIVATE RESIDENCE AUSTRIA





4.0

E27 max. 25W | 220-240VAC  
50-60Hz | composite | wet painted

1.08kg IP20 0.3m

shade only

|  | CODE     |
|--|----------|
|  | 218100W0 |
|  | 218100D0 |
|  | 218100K0 |

OPTIONAL


A60 LED E27 6W dim

|               | CODE     |
|---------------|----------|
| 2200K   315lm | 9003E109 |
| 2700K   500lm | 9003E138 |

|                    |          |
|--------------------|----------|
| G95 LED E27 6W dim |          |
| 2200K   450lm      | 9003E111 |

|                      |          |
|----------------------|----------|
| G95 LED E27 12W opal |          |
| 2700K   1000lm       | 9003E154 |

more lamps and specs on page 703



6.0

E27 max. 25W | 220-240VAC  
50-60Hz | composite | wet painted

2.62kg IP20 0.3m

shade only

|  | CODE     |
|--|----------|
|  | 218200W0 |
|  | 218200D0 |
|  | 218200K0 |

OPTIONAL


A60 LED E27 6W dim

|               | CODE     |
|---------------|----------|
| 2200K   315lm | 9003E109 |
| 2700K   500lm | 9003E138 |

|                    |          |
|--------------------|----------|
| G95 LED E27 6W dim |          |
| 2200K   450lm      | 9003E111 |

|                      |          |
|----------------------|----------|
| G95 LED E27 12W opal |          |
| 2700K   1000lm       | 9003E154 |

more lamps and specs on page 703



8.0

E27 max. 25W | 220-240VAC  
50-60Hz | composite | wet painted

5.70kg IP20 0.3m

shade only

|  | CODE     |
|--|----------|
|  | 218300W0 |
|  | 218300D0 |
|  | 218300K0 |

OPTIONAL

A60 LED E27 6W dim

|               | CODE     |
|---------------|----------|
| 2200K   315lm | 9003E109 |
| 2700K   500lm | 9003E138 |

|                    |          |
|--------------------|----------|
| G95 LED E27 6W dim |          |
| 2200K   450lm      | 9003E111 |

|                      |          |
|----------------------|----------|
| G95 LED E27 12W opal |          |
| 2700K   1000lm       | 9003E154 |

more lamps and specs on page 703



ALWAYS USE

4.0 | 6.0  
cable suspension set | 2.0m cable

|  | CODE     |
|--|----------|
|  | 90015120 |
|  | 90015138 |
|  | 90015134 |
|  | 90015119 |

8.0  
cable suspension set | 2.0m cable

|  | CODE     |
|--|----------|
|  | 90015123 |
|  | 90015139 |
|  | 90015135 |
|  | 90015122 |

6.0m suspension set on page 712

BISHOP  
CEILING SUSPENDED



reddot award 2015  
honourable mention



As awarded by The Chicago Athenaeum:  
Museum of Architecture and Design

DESIGNED BY  
3HDRAFT



PRIVATE RESIDENCE | 3ARCHITECTEN BELGIUM

ELLO

CEILING SUSPENDED



p. 379




reddot award 2015  
winner



As awarded by The Chicago Athenaeum:  
Museum of Architecture and Design

DESIGNED BY  
S&R CORNELISSEN



13.0

LED 18W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS  
aluminium powder coated  
opal PMMA cover


2.00kg IP20 0.3

phase-cut dim | 3000K | >90 CRI |  
981lm

| CODE |          |
|------|----------|
|      | 500284W5 |
|      | 500284B5 |

DALI dim | 3000K | >90 CRI | 981lm

| CODE |          |
|------|----------|
|      | 500285W5 |
|      | 500285B5 |




chrome endcap





PRIVATE RESIDENCE GERMANY

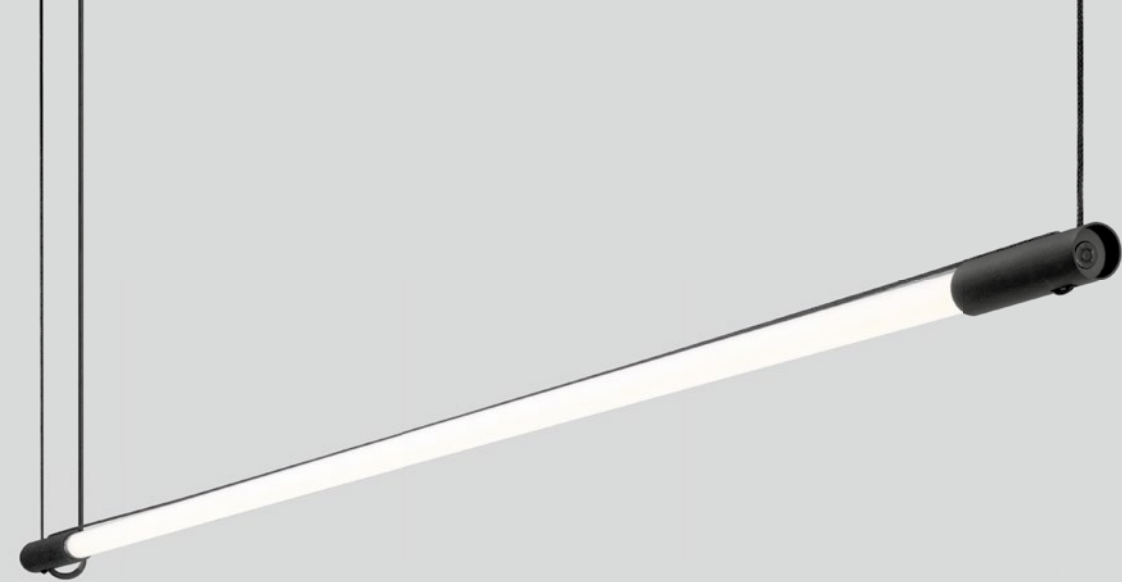


# DARF

CEILING SUSPENDED



p. 555

DESIGNED BY  
MARCH GUT



1.0

LED 22/25W | 220-240VAC  
50-60Hz | aluminium powder  
coated | black textile cable

0.42kg IP20 0.3m

non dim

CODE  
2561T7B

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K   22W  | 3300  | >80 | 4    |
| 4000K   22W  | 3700  | >80 | 6    |

phase-cut dim

CODE  
2561T8B


| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K   25W  | 1700  | >90 | 5    |

available from spring 2020





OFFICE | BOARDROOM GREENHOUSE | INTERVEST ANTWERPEN | BELGIUM

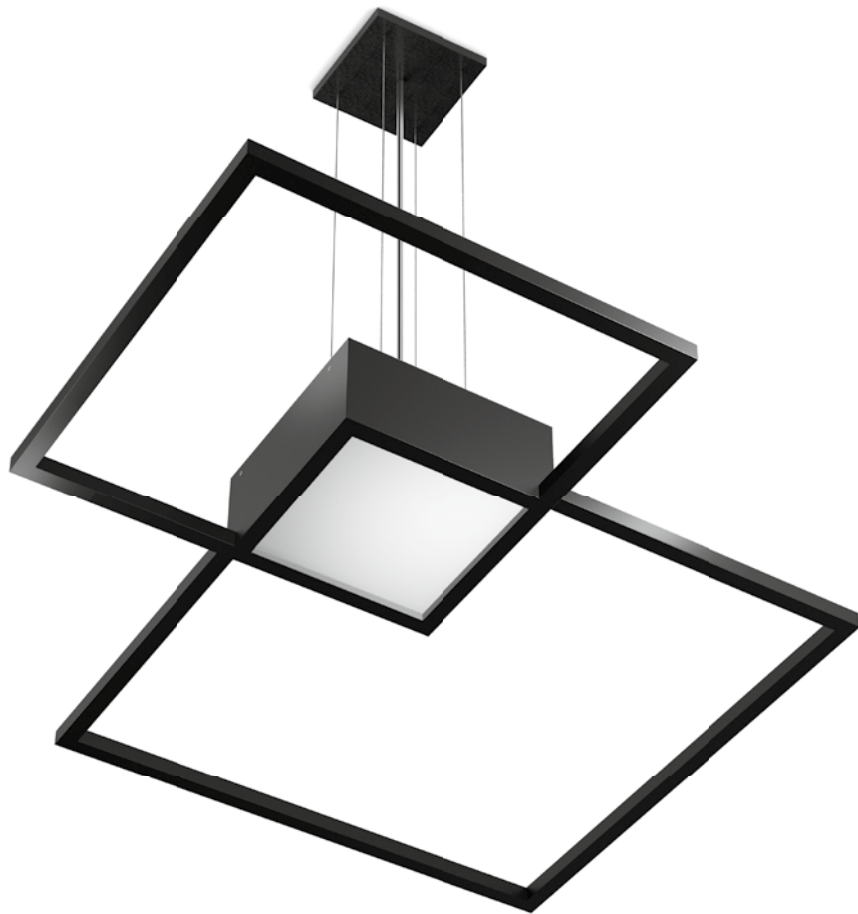


# VENN

CEILING SUSPENDED



DESIGNED BY  
S&R CORNELISSEN



### 3.0

LED 47W | 220-240VAC  
50-60Hz | PCB 3-step | incl. PS  
aluminium powder coated  
opal PMMA cover | direct/indirect



phase-cut dim


|  | CODE     |
|--|----------|
|  | 149384W_ |
|  | 149384Q_ |
|  | 149384B_ |

DALI dim

|  | CODE     |
|--|----------|
|  | 149385W_ |
|  | 149385Q_ |
|  | 149385B_ |

| LIGHT COLOUR | LUMEN    | CRI | CODE |
|--------------|----------|-----|------|
| 2700K        | 370/2100 | >80 | 2    |
| 3000K        | 400/2250 | >80 | 4    |





# BEBOW


CEILING SUSPENDED



p. 331



DESIGNED BY  
S&R CORNELISSEN




## 1.0

LED 35W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
opal cover | two circuits  
aluminium powder coated  
opal PMMA cover

6.30kg IP20 30°

3000K | >90 CRI | 1820lm

|  | CODE     |
|--|----------|
|  | 132384W5 |
|  | 132384B5 |



## 2.0

LED 55W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
opal cover + 3x spot | two circuits  
aluminium powder coated  
opal PMMA cover

6.70kg IP20 30°

3000K | >90 CRI | 2650lm

|  | CODE     |
|--|----------|
|  | 132364W5 |
|  | 132364B5 |



OFFICE REVOR | AAVO ARCHITECTS KUURNE | BELGIUM




# BEBOW

CEILING SUSPENDED



p. 333

DESIGNED BY  
S&R CORNELISSEN




3.0

LED 35W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
opal cover | two circuits  
aluminium powder coated  
opal PMMA cover

8.00kg | IP20 |  $\pm 0.3^\circ$

3000K | >90 CRI | 1910lm

|  | CODE     |
|--|----------|
|  | 132484W5 |
|  | 132484B5 |




4.0

LED 48W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
opal cover + 2x spot | two circuits  
aluminium powder coated  
opal PMMA cover

8.30kg | IP20 |  $\pm 0.3^\circ$

3000K | >90 CRI | 2350lm

|  | CODE     |
|--|----------|
|  | 132464W5 |
|  | 132464B5 |

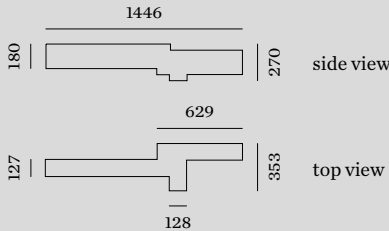






# GIGANT

## CEILING SUSPENDED

DESIGNED BY  
S&R CORNELISSEN



### 10.0

LED 42W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | DALI switch  
dim | opal LLDPE body | steel

8.80kg IP20


| CODE     |
|----------|
| 213185W_ |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 5300   >80  | 4    |
| 4000K        | 5600   >80  | 6    |

### OPTIONAL

| CODE                            |
|---------------------------------|
| suspension<br>set 4.0m 90015114 |

the used material applies to UL 94 HB  
standard and glow wire test 630°  
longer suspension on request



### 16.0

LED 84W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | DALI switch  
dim | opal LLDPE body | steel

15.30kg IP20

| CODE     |
|----------|
| 213285W_ |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 10600   >80 | 4    |
| 4000K        | 11300   >80 | 6    |

### OPTIONAL

| CODE                            |
|---------------------------------|
| suspension<br>set 4.0m 90015114 |

the used material applies to UL 94 HB  
standard and glow wire test 630°  
longer suspension on request





OFFICE ZUIDERPOORT GENT | BELGIUM



OFFICE | DENTSU AEGIS NETWORK | TRZOP ARCHITEKCI | PLUSLIGHTING WARSAW | POLAND






OFFICE | MICROSOFT | CONCEPT & DESIGN: PROCOS GROUP BRUSSELS | BELGIUM



CYCLONE  
CEILING SUSPENDED  
DESIGNED BY  
S&R CORNELISSEN



**17.0**  
LED 70W | 220-240VAC  
50-60Hz | PCB 3-step | incl. PS  
DALI | aluminium powder coated  
opal LLDPE body

8.80kg IP20  $\pm 0.3^\circ$


3000K | >80 CRI | 7000lm  
CODE  
219185W4

the used material applies to UL 94 HB  
standard and glow wire test 630°







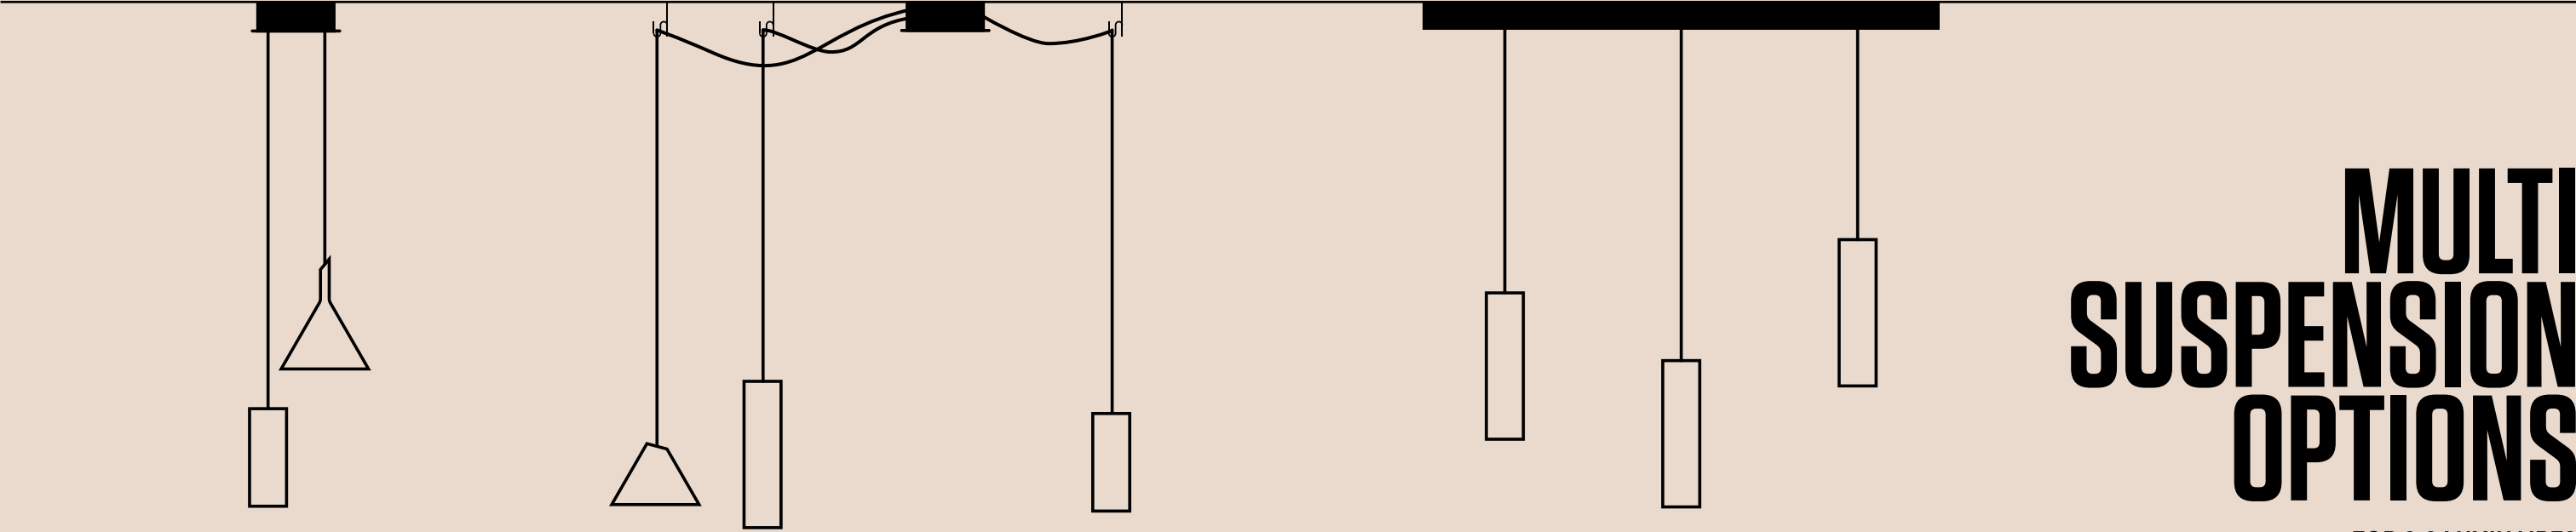

# MULTI SUSPENSION OPTIONS

FOR 2-8 LUMINAIRES

## LET’S HANG OUT TOGETHER


RAY likes swinging from the ceiling together with other Wever & Ducré luminaires. The trick is suspending up to eight luminaires as a round multi-ceiling rose and up to five in a straight form. All you need is a single light outlet from which you can tailor the arrangement. Straight as a die or as a spider's web where the cables become a design element. Who can join the team? Beyond WETRO and DOCUS, BOX, HEXO, CORK, and SHIEK are combination geniuses.

RAY swingt am liebsten gemeinsam mit anderen Wever & Ducré-Leuchten von der Decke. Der Trick: Bis zu acht Leuchten lassen sich als Multibaldachin in runder und bis zu fünf in gerader Form abhängen. Und das von einem einzigen Lichtauslass aus, über dem man sie individuell arrangieren kann. Schnurgerade oder in Spinnennetzform, bei der die Kabel zum Design-Element werden. Wer ins Team passt? Neben WETRO und DOCUS sind auch BOX, HEXO, CORK oder SHIEK absolute Kombinationsgenies.

|                    |        |
|--------------------|--------|
| <b>BOX MULTI</b>   | p. 457 |
| <b>DOCUS MULTI</b> | p. 459 |
| <b>HEXO MULTI</b>  | p. 461 |
| <b>RAY MULTI</b>   | p. 463 |
| <b>WETRO MULTI</b> | p. 465 |
| <b>SHIEK MULTI</b> | p. 467 |
| <b>CORK MULTI</b>  | p. 471 |

single suspension options on page 391

### 2-8 LUMINAIRES




#### CEILING BASE ROUND

standard up to 4 luminaires  
add 90059118 for 5 - 8 luminaires

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 90052005 |
|  | 90052006 |

### 2 LUMINAIRES




#### CEILING BASE

600mm

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 90052007 |
|  | 90052008 |

### 3 LUMINAIRES




#### CEILING BASE

900mm

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 90052009 |
|  | 90052010 |

### 4 LUMINAIRES




#### CEILING BASE

1200mm

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 90052011 |
|  | 90052012 |


### 5 LUMINAIRES



#### CEILING BASE

1500mm

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 90052013 |
|  | 90052014 |

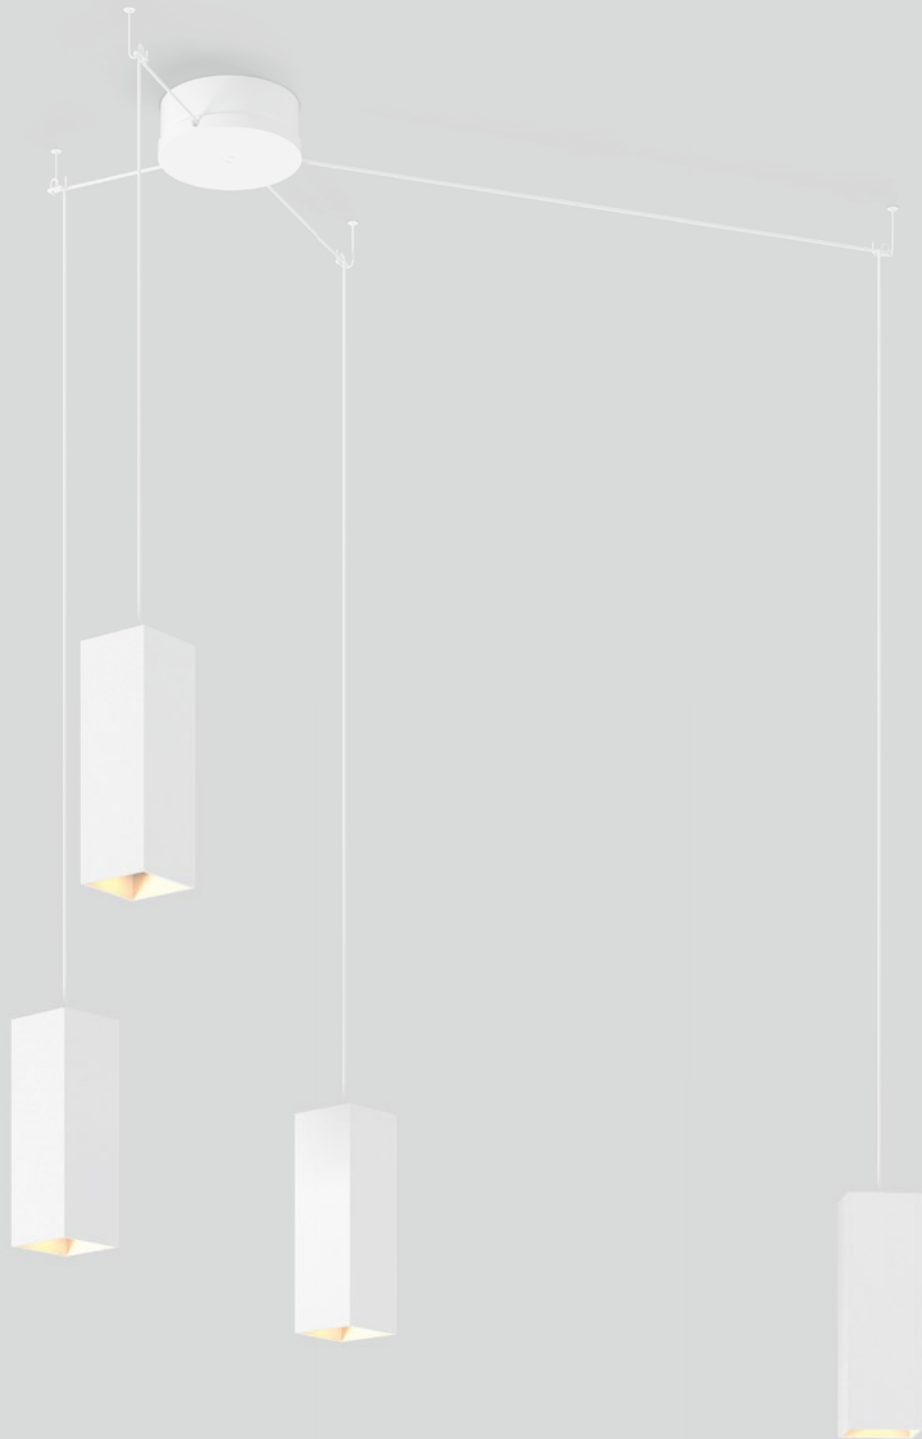

2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.69kg IP20 36°

| 2.0   | CODE    |
|-------|---------|
| 200mm |         |
|       | 227164W |
|       | 227164L |
|       | 227164P |
|       | 227164B |

| 3.0   | CODE    |
|-------|---------|
| 300mm |         |
|       | 227264W |
|       | 227264L |
|       | 227264P |
|       | 227264B |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 420   >90   | 3    |
| 3000K        | 440   >90   | 5    |
| 1800-2850K   | 360   >95   | 9    |

2.0 | 3.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.62kg IP20 36°

| 2.0   | CODE     |
|-------|----------|
| 200mm |          |
|       | 227120W0 |
|       | 227120L0 |
|       | 227120P0 |
|       | 227120B0 |

| 3.0   | CODE     |
|-------|----------|
| 300mm |          |
|       | 227220W0 |
|       | 227220L0 |
|       | 227220P0 |
|       | 227220B0 |

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim  
CODE  
2700K 901228W2  
3000K 901228W4  
1800-2850K 901229S9  
more lamps and specs on page 701

BOX MULTI  
CEILING SUSPENDED

ALWAYS USE

multiple suspension ceiling base  
round for up to 8 lamps

|  | CODE     |
|--|----------|
|  | 90052005 |
|  | 90052006 |

extra set standard connectors for  
5 to 8 lamps

|  | CODE     |
|--|----------|
|  | 90059118 |

multiple suspension ceiling base long  
600mm | 2 lamps

|  | CODE     |
|--|----------|
|  | 90052007 |
|  | 90052008 |


| 900mm   3 lamps | CODE     |
|-----------------|----------|
|                 | 90052009 |
|                 | 90052010 |

| 1200mm   4 lamps | CODE     |
|------------------|----------|
|                  | 90052011 |
|                  | 90052012 |

| 1500mm   5 lamps | CODE     |
|------------------|----------|
|                  | 90052013 |
|                  | 90052014 |

more options and information  
on page 714





**2.0 | 3.0 LED**


LED 6W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.69kg IP20 0.3° 36°

| 2.0   | CODE    |
|-------|---------|
| 200mm | 227564W |
|       | 227564L |
|       | 227564G |
|       | 227564P |
|       | 227564B |

| 3.0   | CODE    |
|-------|---------|
| 300mm | 227664W |
|       | 227664L |
|       | 227664G |
|       | 227664P |
|       | 227664B |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 420   >90   | 3    |
| 3000K        | 440   >90   | 5    |
| 1800-2850K   | 360   >95   | 9    |



**2.0 | 3.0 PAR16**

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.62kg IP20 0.3°

| 2.0   | CODE     |
|-------|----------|
| 200mm | 227520W0 |
|       | 227520L0 |
|       | 227520G0 |
|       | 227520P0 |
|       | 227520B0 |

| 3.0   | CODE     |
|-------|----------|
| 300mm | 227620W0 |
|       | 227620L0 |
|       | 227620G0 |
|       | 227620P0 |
|       | 227620B0 |

**OPTIONAL**

PAR16 LED GU10 7W | phase-cut dim

|            | CODE     |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701

# DOCUS MULTI

CEILING SUSPENDED

**ALWAYS USE**

multiple suspension ceiling base  
round for up to 8 lamps

|  | CODE     |
|--|----------|
|  | 90052005 |
|  | 90052006 |

extra set standard connectors for  
5 to 8 lamps

|  | CODE     |
|--|----------|
|  | 90059118 |

multiple suspension ceiling base long  
600mm | 2 lamps

|  | CODE     |
|--|----------|
|  | 90052007 |
|  | 90052008 |

900mm | 3 lamps

|  | CODE     |
|--|----------|
|  | 90052009 |
|  | 90052010 |

1200mm | 4 lamps

|  | CODE     |
|--|----------|
|  | 90052011 |
|  | 90052012 |



1500mm | 5 lamps

|  | CODE     |
|--|----------|
|  | 90052013 |
|  | 90052014 |

more options and information  
on page 714



SHOP CAMERON | DEJAEGER INTERIEURARCHITECTEN ZWEVEGEM | BELGIUM

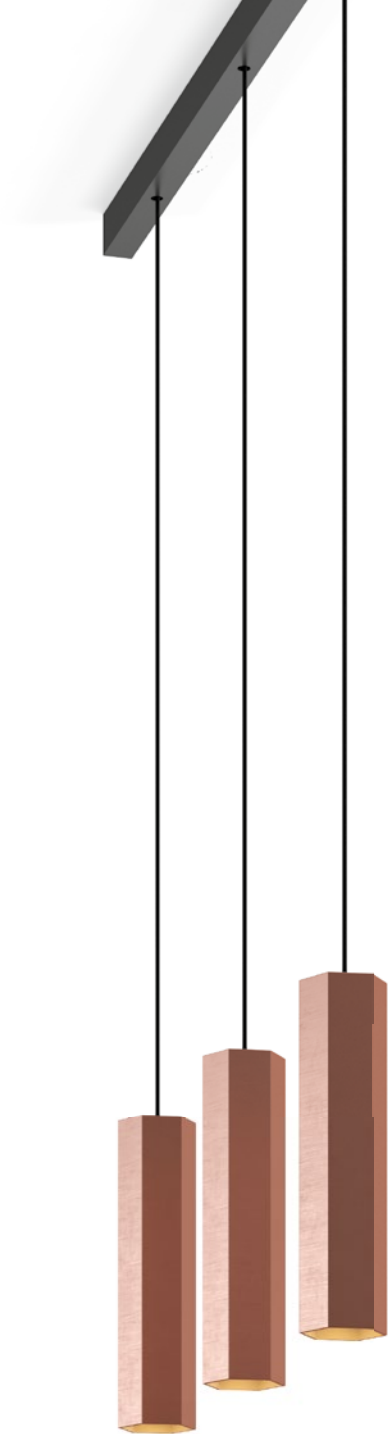

2.0 | 3.0 LED


LED 6W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.66kg IP20 36°

| 2.0   | CODE    |
|-------|---------|
| 200mm |         |
|       | 227364G |
|       | 227364Q |
|       | 227364P |
|       | 227364B |

| 3.0   | CODE    |
|-------|---------|
| 300mm |         |
|       | 227464G |
|       | 227464Q |
|       | 227464P |
|       | 227464B |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 420   >90   | 3    |
| 3000K        | 440   >90   | 5    |
| 1800-2850K   | 360   >95   | 9    |



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.58kg IP20

| 2.0   | CODE     |
|-------|----------|
| 200mm |          |
|       | 227320G0 |
|       | 227320Q0 |
|       | 227320P0 |
|       | 227320B0 |

| 3.0   | CODE     |
|-------|----------|
| 300mm |          |
|       | 227420G0 |
|       | 227420Q0 |
|       | 227420P0 |
|       | 227420B0 |

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim  
CODE

|            |          |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701

HEXO MULTI

CEILING SUSPENDED

ALWAYS USE

multiple suspension ceiling base  
round for up to 8 lamps

|  | CODE     |
|--|----------|
|  | 90052005 |
|  | 90052006 |

extra set standard connectors for  
5 to 8 lamps

|  | CODE     |
|--|----------|
|  | 90059118 |

multiple suspension ceiling base long  
600mm | 2 lamps

|  | CODE     |
|--|----------|
|  | 90052007 |
|  | 90052008 |

900mm | 3 lamps

|  | CODE     |
|--|----------|
|  | 90052009 |
|  | 90052010 |

1200mm | 4 lamps

|  | CODE     |
|--|----------|
|  | 90052011 |
|  | 90052012 |

1500mm | 5 lamps



|  | CODE     |
|--|----------|
|  | 90052013 |
|  | 90052014 |

more options and information  
on page 714





TEA ROOM HUYZE BEGGA KORTRIJK | BELGIUM

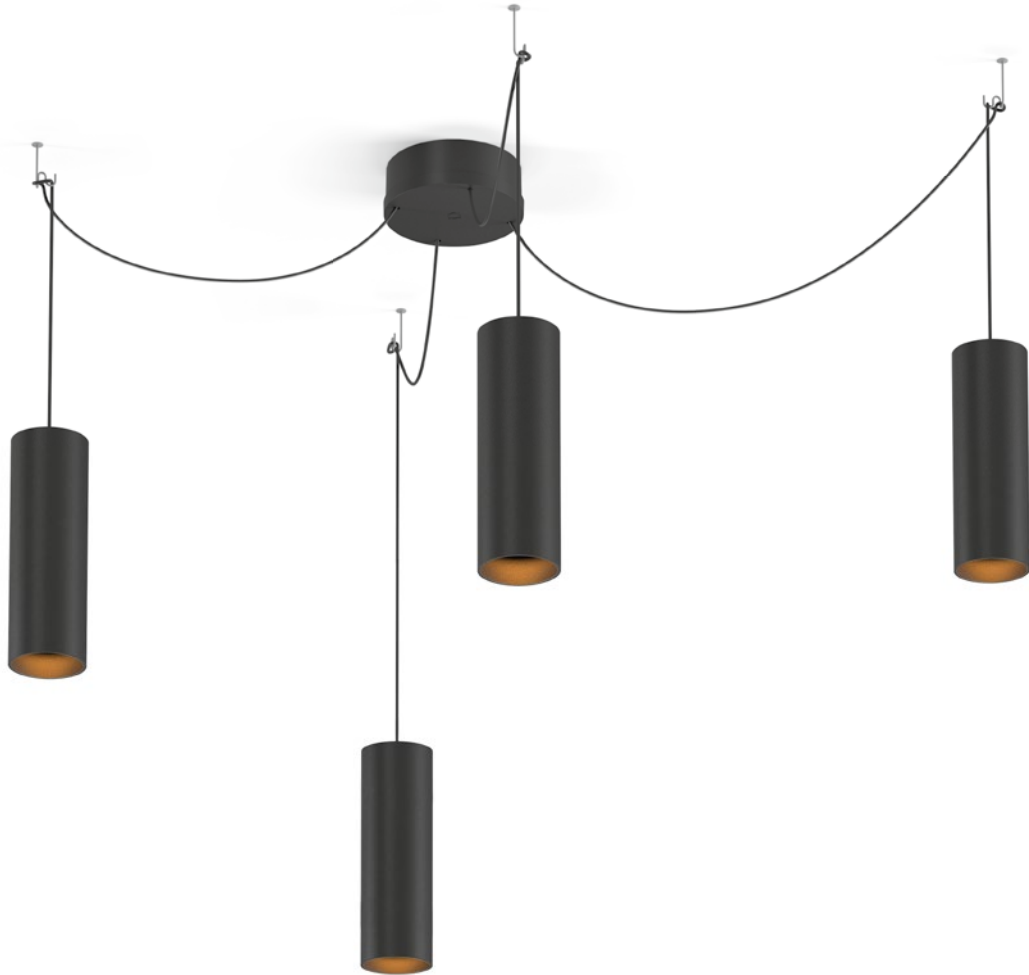

2.0 | 3.0 LED


LED 6W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.62kg IP20 0.3° 36°

| 2.0   | CODE     |
|-------|----------|
| 200mm | 227764W_ |
|       | 227764L_ |
|       | 227764G_ |
|       | 227764P_ |
|       | 227764B_ |

| 3.0   | CODE     |
|-------|----------|
| 300mm | 227864W_ |
|       | 227864L_ |
|       | 227864G_ |
|       | 227864P_ |
|       | 227864B_ |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 420   >90   | 3    |
| 3000K        | 440   >90   | 5    |
| 1800-2850K   | 360   >95   | 9    |



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.54kg IP20 0.3°

| 2.0   | CODE     |
|-------|----------|
| 200mm | 227720W0 |
|       | 227720L0 |
|       | 227720G0 |
|       | 227720P0 |
|       | 227720B0 |

| 3.0   | CODE     |
|-------|----------|
| 300mm | 227820W0 |
|       | 227820L0 |
|       | 227820G0 |
|       | 227820P0 |
|       | 227820B0 |

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim  
CODE

|            |          |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701

ALWAYS USE

multiple suspension ceiling base  
round for up to 8 lamps

| CODE     |
|----------|
| 90052005 |
| 90052006 |

extra set standard connectors for  
5 to 8 lamps

| CODE     |
|----------|
| 90059118 |

multiple suspension ceiling base long  
600mm | 2 lamps

| CODE     |
|----------|
| 90052007 |
| 90052008 |

900mm | 3 lamps

| CODE     |
|----------|
| 90052009 |
| 90052010 |


1200mm | 4 lamps

| CODE     |
|----------|
| 90052011 |
| 90052012 |

1500mm | 5 lamps

| CODE     |
|----------|
| 90052013 |
| 90052014 |

more options and information  
on page 714




1.0

LED 11W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim  
hand blown glass

0.56 kg IP20  $\approx 0.3 \times$  6

1800-2850K | >90 CRI | 340lm

|  | CODE      |
|--|-----------|
|  | 236189P9  |
|  | 236189B9  |
|  | 236189TD9 |
|  | 236189TS9 |
|  | 236189TW9 |




2.0

LED 11W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim  
hand blown glass

0.97 kg IP20  $\approx 0.3 \times$  6

1800-2850K | >90 CRI | 340lm

|  | CODE      |
|--|-----------|
|  | 236289P9  |
|  | 236289B9  |
|  | 236289TD9 |
|  | 236289TS9 |
|  | 236289TW9 |



3.0

LED 11W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim  
hand blown glass

1.69 kg IP20  $\approx 0.3 \times$  6

1800-2850K | >90 CRI | 340lm

|  | CODE      |
|--|-----------|
|  | 236389P9  |
|  | 236389B9  |
|  | 236389TD9 |
|  | 236389TS9 |
|  | 236389TW9 |

# WETRO MULTI

CEILING SUSPENDED



As awarded by The Chicago Athenaeum:  
Museum of Architecture and Design

DESIGNED BY  
3HDRAFT

## ALWAYS USE

multiple suspension ceiling base  
round for up to 8 lamps

|  | CODE     |
|--|----------|
|  | 90052005 |
|  | 90052006 |

extra set standard connectors for  
5 to 8 lamps

|  | CODE     |
|--|----------|
|  | 90059118 |

multiple suspension ceiling base long  
600mm | 2 lamps | only for 1.0

|  | CODE     |
|--|----------|
|  | 90052007 |
|  | 90052008 |

900mm | 3 lamps | only for 1.0

|  | CODE     |
|--|----------|
|  | 90052009 |
|  | 90052010 |

1200mm | 4 lamps | only for 1.0


|  | CODE     |
|--|----------|
|  | 90052011 |
|  | 90052012 |

1500mm | 5 lamps | only for 1.0

|  | CODE     |
|--|----------|
|  | 90052013 |
|  | 90052014 |

more options and information  
on page 714






1.0 LED

LED 11W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim | aluminium  
powder coated | lacquered  
incl. 1x strain relief and hook

0.36 kg IP20 0.3

1800-2850K | >90 CRI | 510lm

|  | CODE     |
|--|----------|
|  | 237189W9 |
|  | 237189J9 |
|  | 237189P9 |
|  | 237189K9 |
|  | 237189Z9 |




2.0 LED

LED 11W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim | aluminium  
powder coated | lacquered  
incl. 1x strain relief and hook

0.47 kg IP20 0.3

1800-2850K | >90 CRI | 510lm

|  | CODE     |
|--|----------|
|  | 237289W9 |
|  | 237289J9 |
|  | 237289P9 |
|  | 237289K9 |
|  | 237289Z9 |




3.0 LED

LED 11W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim | aluminium  
powder coated | lacquered  
incl. 1x strain relief and hook

0.60 kg IP20 0.3

1800-2850K | >90 CRI | 510lm

|  | CODE     |
|--|----------|
|  | 237389W9 |
|  | 237389J9 |
|  | 237389P9 |
|  | 237389K9 |
|  | 237389Z9 |



3.0 E27

E27 max. 20W | E27 | A60  
100-240VAC | 50-60Hz  
aluminium powder coated  
lacquered | incl. 1x strain relief  
and hook

0.6 kg IP20 0.3

|  | CODE     |
|--|----------|
|  | 2343E8W0 |
|  | 2343E8J0 |
|  | 2343E8P0 |
|  | 2343E8K0 |
|  | 2343E8Z0 |

SHIEK MULTI

CEILING SUSPENDED

DESIGNED BY  
3HDRAFT

ALWAYS USE

multiple suspension ceiling base  
round for up to 8 lamps

|  | CODE     |
|--|----------|
|  | 90052005 |
|  | 90052006 |

extra set standard connectors for  
5 to 8 lamps

|  | CODE     |
|--|----------|
|  | 90059118 |

multiple suspension ceiling base long  
600mm | 2 lamps | only for 1.0

|  | CODE     |
|--|----------|
|  | 90052007 |
|  | 90052008 |

900mm | 3 lamps | only for 1.0

|  | CODE     |
|--|----------|
|  | 90052009 |
|  | 90052010 |

1200mm | 4 lamps | only for 1.0

|  | CODE     |
|--|----------|
|  | 90052011 |
|  | 90052012 |

1500mm | 5 lamps | only for 1.0

|  | CODE     |
|--|----------|
|  | 90052013 |
|  | 90052014 |

more options and information  
on page 714




PRIVATE RESIDENCE OBUMEX - STEENOVEN BELGIUM

# SHIEK MULTI

CEILING SUSPENDED

DESIGNED BY  
3HDRAFT




## 4.0 LED

LED 11W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim | aluminium  
powder coated | lacquered  
incl. 1x strain relief and hook

0.70 kg IP20 0.3m

1800-2850K | >90 CRI | 510lm

|  | CODE     |
|--|----------|
|  | 237489W9 |
|  | 237489J9 |
|  | 237489P9 |
|  | 237489K9 |
|  | 237489Z9 |




## 5.0 LED

LED 11W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim | aluminium  
powder coated | lacquered  
incl. 1x strain relief and hook

0.80 kg IP20 0.3m

1800-2850K | >90 CRI | 510lm

|  | CODE     |
|--|----------|
|  | 237589W9 |
|  | 237589J9 |
|  | 237589P9 |
|  | 237589K9 |
|  | 237589Z9 |




## 4.0 E27

E27 max. 20W | E27 | A60  
100-240VAC | 50-60Hz  
aluminium powder coated  
lacquered | incl. 1x strain relief  
and hook

0.70 kg IP20 0.3m

1800-2850K | >90 CRI | 510lm

|  | CODE     |
|--|----------|
|  | 2344E8W0 |
|  | 2344E8J0 |
|  | 2344E8P0 |
|  | 2344E8K0 |
|  | 2344E8Z0 |



## 5.0 E27

E27 max. 20W | A60 | 100-240VAC  
50-60Hz | aluminium powder  
coated | lacquered | incl. 1x strain  
relief and hook | for multiple  
suspension ceiling base round

0.80 kg IP20 0.3m

1800-2850K | >90 CRI | 510lm

|  | CODE     |
|--|----------|
|  | 2345E8W0 |
|  | 2345E8J0 |
|  | 2345E8P0 |
|  | 2345E8K0 |
|  | 2345E8Z0 |

## ALWAYS USE

multiple suspension ceiling base  
round for up to 8 lamps

|  |          |
|--|----------|
|  | CODE     |
|  | 90052005 |
|  | 90052006 |

extra set standard connectors for  
5 to 8 lamps

|  |          |
|--|----------|
|  | CODE     |
|  | 90059118 |

more options and information  
on page 714






BRASSERIE GRAND CRU | ARCHITECT ABOUT-S BRUGGE | BELGIUM



# CORK MULTI

CEILING SUSPENDED



1.0

LED 2W | 500mA | 3V  
PCB 3-step | excl. power supply  
aluminium powder coated  
fits bottles inner ø16,5 - 19,5 mm  
and max. 1kg

0.24kg IP20 0.3-1 36°

|  | CODE    |
|--|---------|
|  | 210263W |
|  | 210263B |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2200K        | 105   >80   | 1    |
| 2700K        | 115   >80   | 2    |

## OPTIONAL

|                | CODE     |
|----------------|----------|
| bottle 1       |          |
| 75/174   glass | 90019013 |
| bottle 2       |          |
| 87/323   glass | 90019014 |

## ALWAYS USE

suspension base round for 3-8 lamps  
incl. power supply

|  | CODE     |
|--|----------|
|  | 90052015 |
|  | 90052016 |

suspension base long  
600mm | 2 lamps | incl. power supply

|  | CODE     |
|--|----------|
|  | 90052017 |
|  | 90052018 |

900mm | 3 lamps | incl. power supply

|  | CODE     |
|--|----------|
|  | 90052019 |
|  | 90052020 |

more options and information  
on page 714

# WALL RECESSED

p. 475 — 485

## WALL RECESSED



**SMILE IN**  
p. 475



**SMILE IN**  
p. 475



**LITO 1.0**  
p. 477



**LITO 2.0**  
p. 477



**STRIPE**  
p. 479



**STRANGE**  
p. 481



**THEMIS**  
p. 483




**ORIS**  
p. 485







SMILE IN  
WALL RECESSED



p. 589



1.0

LED 4/6W | 350/500mA | 9Vf  
COB 3-step | excl. power supply  
aluminium powder coated  
brushed

0.39kg IP20 0.3~1.0 6

86-88 40 min 13

3000K | >80 CRI | 230/320lm

|  | CODE     |
|--|----------|
|  | 326151W4 |
|  | 702151L4 |

2.0

LED 4/6W | 350/500mA | 9Vf  
COB 3-step | excl. power supply  
aluminium powder coated  
brushed

0.42kg IP20 0.3~1.0 6

86-88 40 min 13

3000K | >80 CRI | 230/320lm

|  | CODE     |
|--|----------|
|  | 326251W4 |
|  | 703151L4 |

ALWAYS USE

power supply

|            | CODE     |
|------------|----------|
| 350mA   6W | 90213202 |
| 500mA   6W | 90214201 |

more power supplies on page 695

OPTIONAL

|               | CODE     |
|---------------|----------|
| recessed ring | 90012030 |

ALWAYS USE

power supply

|            | CODE     |
|------------|----------|
| 350mA   6W | 90213202 |
| 500mA   6W | 90214201 |



more power supplies on page 695

OPTIONAL

|               | CODE     |
|---------------|----------|
| recessed ring | 90012030 |



LITO  
WALL RECESSED



1.0

LED 2/3W | 350/500mA | 6Vf  
PCB 3-step | excl. power supply  
aluminium powder coated  
anodised

0.09kg IP20 0.3 P

70x70 35 12-18

3000K | >90 CRI | 160/210lm

|  | CODE     |
|--|----------|
|  | 145181W4 |
|  | 145181A4 |
|  | 145181B4 |

2.0

LED 2/3W | 350/500mA | 6Vf  
PCB 3-step | excl. power supply  
aluminium powder coated  
anodised

0.09kg IP20 0.3 P

70x70 35 12-18

3000K | >90 CRI | 160/210lm

|  | CODE     |
|--|----------|
|  | 145281W4 |
|  | 145281A4 |
|  | 145281B4 |

ALWAYS USE

power supply

|            | CODE     |
|------------|----------|
| 350mA   6W | 90213202 |
| 500mA   6W | 90214201 |

more power supplies on page 695

OPTIONAL

|                  | CODE     |
|------------------|----------|
| recessed housing | 90012027 |
| plasterkit       | 90017119 |

recessed housing always use in  
combination with plasterkit

ALWAYS USE

power supply

|            | CODE     |
|------------|----------|
| 350mA   6W | 90213202 |
| 500mA   6W | 90214201 |

more power supplies on page 695

OPTIONAL

|                  | CODE     |
|------------------|----------|
| recessed housing | 90012027 |
| plasterkit       | 90017119 |

recessed housing always use in  
combination with plasterkit








# STRIPE

WALL RECESSED



## 0.4

LED 1/2W | 350/700mA | 3Vf  
PCB 3-step | excl. power supply  
aluminium powder coated  
brushed

0.09kg IP20 0.3m 16

25x56 40 2-18

3000K | >80 CRI | 11/20lm

|  | CODE     |
|--|----------|
|  | 305151W4 |
|  | 305151L4 |
|  | 305151B4 |
|  | 305151G4 |

## ALWAYS USE


power supply

|            | CODE     |
|------------|----------|
| 350mA   6W | 90213202 |
| 700mA   6W | 90215203 |

more power supplies on page 695

## OPTIONAL

|                  | CODE     |
|------------------|----------|
| recessed housing |          |
| incl. plasterkit | 90012037 |



## 0.7

LED 1/2W | 350/700mA | 3Vf  
PCB 3-step | excl. power supply  
aluminium powder coated  
brushed

0.10kg IP20 0.3m 16

25x56 40 2-18

3000K | >80 CRI | 11/20lm

|  | CODE     |
|--|----------|
|  | 305251W4 |
|  | 305251L4 |
|  | 305251B4 |
|  | 305251G4 |

## ALWAYS USE


power supply

|            | CODE     |
|------------|----------|
| 350mA   6W | 90213202 |
| 700mA   6W | 90215203 |

more power supplies on page 695

## OPTIONAL

|                  | CODE     |
|------------------|----------|
| recessed housing |          |
| incl. plasterkit | 90012037 |



## 2.2

LED 1/2W | 350/700mA | 3Vf  
PCB 3-step | excl. power supply  
aluminium powder coated  
brushed

0.27kg IP20 0.3m 16

25x170 40 2-18

3000K | >80 CRI | 17/27lm

|  | CODE     |
|--|----------|
|  | 305351W4 |
|  | 305351L4 |
|  | 305351B4 |
|  | 305351G4 |

## ALWAYS USE


power supply

|            | CODE     |
|------------|----------|
| 350mA   6W | 90213202 |
| 700mA   6W | 90215203 |

more power supplies on page 695

## OPTIONAL

|                  | CODE     |
|------------------|----------|
| recessed housing |          |
| incl. plasterkit | 90012038 |



1.7

LED 4/5W | 500/700mA | 6Vf  
PCB 3-step | excl. power supply  
aluminium powder coated  
lacquered | incl. plasterkit

0.24kg IP20 0.3m

170x86 55 2-25

| CODE |          |
|------|----------|
|      | 320271W_ |
|      | 320271S_ |


| LIGHT COLOUR | LUMEN   | CRI | CODE |
|--------------|---------|-----|------|
| 2700K        | 230/320 | >80 | 2    |
| 3000K        | 260/350 | >80 | 4    |

ALWAYS USE

power supply

| CODE       |          |
|------------|----------|
| 500mA   6W | 90214201 |
| 700mA   6W | 90215203 |

more power supplies on page 695



2.7

LED 4/5W | 500/700mA | 6Vf  
PCB 3-step | excl. power supply  
aluminium powder coated  
lacquered | incl. plasterkit

0.31kg IP20 0.3m

270x86 55 2-25

| CODE |          |
|------|----------|
|      | 320371W_ |
|      | 320371S_ |


| LIGHT COLOUR | LUMEN   | CRI | CODE |
|--------------|---------|-----|------|
| 2700K        | 230/320 | >80 | 2    |
| 3000K        | 260/350 | >80 | 4    |

ALWAYS USE

power supply

| CODE       |          |
|------------|----------|
| 500mA   6W | 90214201 |
| 700mA   6W | 90215203 |

more power supplies on page 695



5.0

LED 4/5W | 500/700mA | 6Vf  
PCB 3-step | excl. power supply  
aluminium powder coated  
lacquered | incl. plasterkit

0.45kg IP20 0.3m

470x86 55 2-25

| CODE |          |
|------|----------|
|      | 320671W_ |
|      | 320671S_ |

| LIGHT COLOUR | LUMEN   | CRI | CODE |
|--------------|---------|-----|------|
| 2700K        | 230/320 | >80 | 2    |
| 3000K        | 260/350 | >80 | 4    |

ALWAYS USE

power supply


| CODE       |          |
|------------|----------|
| 500mA   6W | 90214201 |
| 700mA   6W | 90215203 |

more power supplies on page 695





HOTEL CLARION AIRPORT | INTERIOR ARCHITECT PUROPLAN OY HELSINKI | FINLAND



1.7

LED 4/5W | 500/700mA | 6Vf  
PCB 3-step | excl. power supply  
aluminium powder coated  
lacquered

0.24kg IP20 0.3m

70x158 50 2-18

|  | CODE     |
|--|----------|
|  | 323271W_ |
|  | 323271X_ |
|  | 323271S_ |
|  | 323271K_ |

| LIGHT COLOUR | LUMEN   | CRI | CODE |
|--------------|---------|-----|------|
| 2700K        | 230/320 | >80 | 2    |
| 3000K        | 260/350 | >80 | 4    |

ALWAYS USE


power supply

|            | CODE     |
|------------|----------|
| 500mA   6W | 90214201 |
| 700mA   6W | 90215203 |

more power supplies on page 695

OPTIONAL

recessed housing and plasterkit  
on page 708



2.7

LED 4/5W | 500/700mA | 6Vf  
PCB 3-step | excl. power supply  
aluminium powder coated  
lacquered

0.31kg IP20 0.3m

70x258 50 2-18

|  | CODE     |
|--|----------|
|  | 323371W_ |
|  | 323371X_ |
|  | 323371S_ |
|  | 323371K_ |

| LIGHT COLOUR | LUMEN   | CRI | CODE |
|--------------|---------|-----|------|
| 2700K        | 230/320 | >80 | 2    |
| 3000K        | 260/350 | >80 | 4    |

ALWAYS USE

power supply


|            | CODE     |
|------------|----------|
| 500mA   6W | 90214201 |
| 700mA   6W | 90215203 |

more power supplies on page 695

OPTIONAL

recessed housing and plasterkit  
on page 708

THEMIS  
WALL RECESSED



5.0

LED 4/5W | 500/700mA | 6Vf  
PCB 3-step | excl. power supply  
aluminium powder coated  
lacquered

0.45kg IP20 0.3m

70x458 50 2-18

|  | CODE     |
|--|----------|
|  | 323671W_ |
|  | 323671X_ |
|  | 323671S_ |

| LIGHT COLOUR | LUMEN   | CRI | CODE |
|--------------|---------|-----|------|
| 2700K        | 230/320 | >80 | 2    |
| 3000K        | 260/350 | >80 | 4    |

ALWAYS USE

power supply

|            | CODE     |
|------------|----------|
| 500mA   6W | 90214201 |
| 700mA   6W | 90215203 |

more power supplies on page 695

OPTIONAL


recessed housing and plasterkit  
on page 708



ORIS  
WALL RECESSED



p. 591



0.7

LED 1/2W | 350/700mA | 3Vf  
PCB 3-step | excl. power supply  
aluminium powder coated

0.28kg IP20 0.3 4

47x182 40 4-40

3000K | >80 CRI | 90/150lm

|  | CODE     |
|--|----------|
|  | 327161W4 |
|  | 327161B4 |

ALWAYS USE


power supply

|            | CODE     |
|------------|----------|
| 350mA   6W | 90213202 |
| 500mA   6W | 90214201 |
| 700mA   6W | 90215203 |

more power supplies on page 695

OPTIONAL

|                  | CODE     |
|------------------|----------|
| recessed housing |          |
| incl. plasterkit | 90012039 |
| concrete         |          |
| housing          | 90012044 |



1.3

LED 2/4W | 350/700mA | 6Vf  
PCB 3-step | excl. power supply  
aluminium powder coated

0.34kg IP20 0.3 4

115x117 40 4-40

3000K | >80 CRI | 180/300lm

|  | CODE     |
|--|----------|
|  | 327261W4 |
|  | 327261B4 |

ALWAYS USE


power supply

|            | CODE     |
|------------|----------|
| 350mA   6W | 90213202 |
| 500mA   6W | 90214201 |
| 700mA   6W | 90215203 |

more power supplies on page 695

OPTIONAL

|                  | CODE     |
|------------------|----------|
| recessed housing |          |
| incl. plasterkit | 90012041 |
| concrete         |          |
| housing          | 90012040 |



2.0

LED 2/4W | 350/700mA | 6Vf  
PCB 3-step | excl. power supply  
aluminium powder coated

0.42kg IP20 0.3 4

115x185 40 4-40

3000K | >80 CRI | 180/300lm

|  | CODE     |
|--|----------|
|  | 327361W4 |
|  | 327361B4 |

ALWAYS USE

power supply

|            | CODE     |
|------------|----------|
| 350mA   6W | 90213202 |
| 500mA   6W | 90214201 |
| 700mA   6W | 90215203 |

more power supplies on page 695

OPTIONAL

|                  | CODE     |
|------------------|----------|
| recessed housing |          |
| incl. plasterkit | 90012043 |
| concrete         |          |
| housing          | 90012042 |



## WALL SURFACE SPOTLIGHTS



**ODREY 1.0**  
p. 491



**ODREY 2.0**  
p. 493



**RAY MINI**  
p. 495



**RAY**  
p. 497



**BOX MINI**  
p. 503



**BOX**  
p. 505



**DOCUS MINI**  
p. 513



**HEXO MINI**  
p. 515



**TRAIN**  
p. 517



**CENTRAL**  
p. 519



**STATION**  
p. 521



**SARA SNOOZE**  
p. 523



**MICK SNOOZE**  
p. 527



**MICK WALL 1.0**  
p. 529

## WALL SURFACE LUMINAIRES



**LEENS**  
p. 531



**BENTA**  
p. 533



**BENTO**  
p. 535



**INCH**  
p. 537



**SCAVA**  
p. 539



**MILES ROUND**  
p. 541




**MILES CARRÉ**  
p. 543



**MILES 9.0**  
p. 545



**ARZY**  
p. 547



**VENN**  
p. 549



**FINLIN 1.0**  
p. 553



**FINLIN 4.0**  
p. 553



**DARF**  
p. 555

## WALL SURFACE IP-RATED



**LIGHTDROP IP44**  
p. 557



**MIRBA IP44**  
p. 559



**MIRBI LONG IP44**  
p. 561

## WALL SURFACE DESIGNER FAMILIES



**ROOMOR  
WALL**  
p. 39



**WIRO  
WALL**  
p. 117



**MIRRO  
WALL**  
p. 57



**DRO  
WALL**  
p. 71



**REVER  
WALL**  
p. 133



**J.J.W.  
WALL**  
p. 157

# WALL SURFACE

p. 489 — 561

# SHE LIGHTS UP EVERY ROOM

## ODREY ON THE WALL



### MIX AND MATCH

[weverducre.com/odrey](https://weverducre.com/odrey)

It exudes the elegance of the 50s like no other. And can change its look faster than any movie star. Who are we talking about? ODREY, of course. It looks stunning in almost any colour combination. And it is highly flexible in terms of the shape of the shade. There are three different shades to choose from, available in black or gold. They can be combined with two mounts in black or gold to create an ever-changing luminaire. ODREY can emit light either upwards, downwards, or in both directions, which is especially lovely. Corridors or restaurant walls can thus be skilfully accentuated.


Sie versprüht die Eleganz der 50er wie keine andere. Und kann ihren Look schneller wechseln als jeder Filmstar. Von wem hier die Rede ist? Natürlich von ODREY, die in nahezu jeder Farbkombination umwerfend aussieht. Und sich auch in puncto Schirmform höchst flexibel zeigt. Zur Auswahl stehen drei verschiedene Shades, die in Schwarz oder Gold zu haben sind. Sie können mit je zwei Mountings in Schwarz oder Gold kombiniert werden und ergeben so immer wieder eine neue Leuchte. Besonders schön: ODREY kann das Licht entweder nach oben, nach unten oder in beide Richtungen abgeben. So können Flure oder Restaurantwände gekonnt akzentuiert werden.

# CREATE YOUR VERY OWN ODREY

## MOUNTING + SHADES

### MOUNTING

available in ● black or ● gold



1.0



2.0



### SHADES

available in ● black or ● gold



3.0  
ø 100



4.0  
ø 124



5.0  
ø 115



3.0 + 4.0




4.0 + 4.0




5.0 + 3.0





available from summer 2020



1.0

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
steel and aluminium wet painted

IP20 0.29kg

mounting

|  | CODE     |
|--|----------|
|  | 257420G0 |
|  | 257420B0 |

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

|            | CODE     |
|------------|----------|
| 2700K      | 901228B3 |
| 3000K      | 901228B5 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701

ALWAYS USE

shade 3.0 | 4.0 | 5.0 in gold


|     | CODE     |
|-----|----------|
| 3.0 | 911423G1 |
| 4.0 | 911424G1 |
| 5.0 | 911425G1 |

shade 3.0 | 4.0 | 5.0 in black

|     | CODE     |
|-----|----------|
| 3.0 | 911423B1 |
| 4.0 | 911424B1 |
| 5.0 | 911425B1 |

ODREY

WALL SURFACE









# ODREY


## WALL SURFACE




3.0



4.0



5.0



### 2.0

2x PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
steel and aluminium wet painted

0.29kg IP20  $\pm 0.3^\circ$

### mounting

|  | CODE     |
|--|----------|
|  | 257320G0 |
|  | 257320B0 |

### OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

|            | CODE     |
|------------|----------|
| 2700K      | 901228B3 |
| 3000K      | 901228B5 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701

### ALWAYS USE

2 shades needed

shade 3.0 | 4.0 | 5.0 in gold

|     | CODE     |
|-----|----------|
| 3.0 | 911423G1 |
| 4.0 | 911424G1 |
| 5.0 | 911425G1 |

shade 3.0 | 4.0 | 5.0 in black

|     | CODE     |
|-----|----------|
| 3.0 | 911423B1 |
| 4.0 | 911424B1 |
| 5.0 | 911425B1 |


available from summer 2020





# RAY mini

WALL SURFACE



## 1.0

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.21kg IP20

aluminium | ø67 x 115

| CODE |          |
|------|----------|
|      | 300220W0 |
|      | 300220L0 |
|      | 300220P0 |
|      | 300220B0 |

wood | ø70 x 115


| CODE   |           |
|--------|-----------|
| walnut | 300220WN0 |

## OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

| CODE       |          |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701



## 2.0

2x PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.36kg IP20

aluminium | ø67 x 115

| CODE |          |
|------|----------|
|      | 301220W0 |
|      | 301220L0 |
|      | 301220P0 |
|      | 301220B0 |

wood | ø70 x 200

| CODE   |           |
|--------|-----------|
| walnut | 301220WN0 |

## OPTIONAL

PAR16 LED GU10 7W | phase-cut dim


| CODE       |          |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701



RAY

WALL SURFACE



1.0 QT14

QT14 max. 75W | G9  
220-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.62kg IP20

|  | CODE     |
|--|----------|
|  | 3221G0W0 |
|  | 3221G0L0 |
|  | 3221G0G0 |
|  | 3221G0Q0 |
|  | 3221G0P0 |
|  | 3221G0B0 |

OPTIONAL


|               | CODE     |
|---------------|----------|
| QT14 LED 3W   |          |
| 2700K   200lm | 9019G705 |
| 3000K   300lm | 9019G703 |

more lamps on page 703

flaps for adjustable beam angle

|  | CODE     |
|--|----------|
|  | 900401W0 |

more lamps and specs on page 703




1.0 LED

LED 6W | 220-240VAC | 50-60Hz  
PCB 3-step | phase-cut dim  
aluminium powder coated  
brushed | incl. flaps for adjustable  
beam angle

0.62kg IP20

|  | CODE     |
|--|----------|
|  | 332168W_ |
|  | 332168L_ |
|  | 332168G_ |
|  | 332168Q_ |
|  | 332168P_ |
|  | 332168B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 400   | >80 | 2    |
| 3000K        | 440   | >80 | 4    |
| 1800-2850K   | 400   | >80 | 9    |



2.0 LED

2x LED 3W | 220-240VAC | 50-60Hz  
PCB 3-step | phase-cut dim  
aluminium powder coated  
brushed | incl. flaps for adjustable  
beam angle

0.69kg IP20

|  | CODE     |
|--|----------|
|  | 332148W_ |
|  | 332148L_ |
|  | 332148G_ |
|  | 332148Q_ |
|  | 332148P_ |
|  | 332148B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 2x200 | >80 | 2    |
| 3000K        | 2x220 | >80 | 4    |
| 1800-2850K   | 2x200 | >80 | 9    |





RAY

WALL SURFACE

- 



p. 267
- 

p. 367  
p. 377
- 

p. 401
- 

p. 575
- 

p. 601

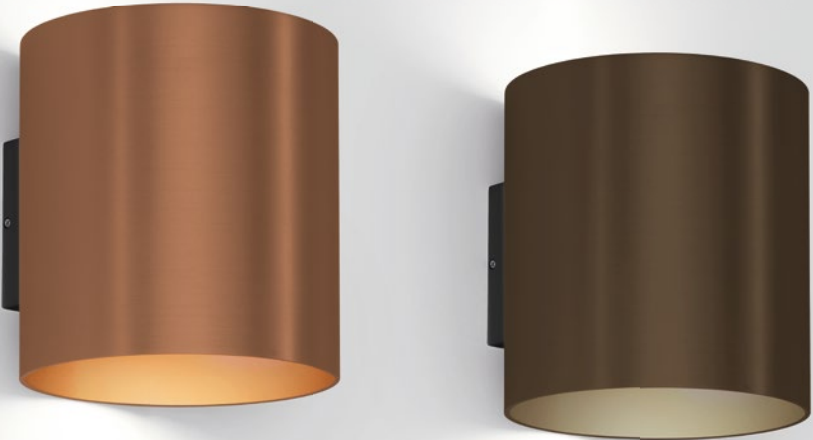

3.0 LED

 2x LED 3W | 220-240VAC | 50-60Hz  
PCB 3-step | phase-cut dim  
aluminium powder coated  
brushed | incl. flaps for adjustable  
beam angle

  0.85kg  IP20  0,3°

| CODE                                                                                  |          |
|---------------------------------------------------------------------------------------|----------|
|  | 332248W_ |
|  | 332248L_ |
|  | 332248G_ |
|  | 332248Q_ |
|  | 332248P_ |
|  | 332248B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 2x200 | >80 | 2    |
| 3000K        | 2x220 | >80 | 4    |
| 1800-2850K   | 2x200 | >80 | 9    |










# BOX mini

WALL SURFACE



p. 271



## 1.0

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.24kg IP20 0.3m

aluminium | 67 x 115

|  | CODE     |
|--|----------|
|  | 300120W0 |
|  | 300120L0 |
|  | 300120P0 |
|  | 300120B0 |

walnut | 70 x 115


|  | CODE      |
|--|-----------|
|  | 300120WN0 |

## OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

|            | CODE     |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701



## 2.0

2x PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.44kg IP20 0.3m

aluminium | 67 x 200

|  | CODE     |
|--|----------|
|  | 301120W0 |
|  | 301120L0 |
|  | 301120P0 |
|  | 301120B0 |

walnut | 70 x 200

|  | CODE      |
|--|-----------|
|  | 301120WN0 |

## OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

|            | CODE     |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701




RESTAURANT GUST | INTERIOR DESIGN FREDERIC HOOFT KORTRIJK | BELGIUM



# BOX

## WALL SURFACE




### 1.0 QT14

QT14 max. 75W | G9  
220-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.66kg IP20 0.3°

|        | CODE      |
|--------|-----------|
|        | 3211GOW0  |
|        | 3211GOL0  |
|        | 3211GOG0  |
|        | 3211GOQ0  |
|        | 3211GOP0  |
|        | 3211GOB0  |
| walnut | 3211GOWN0 |




### 1.0 LED

LED 6W | 220-240VAC | 50-60Hz  
PCB 3-step | phase-cut dim  
aluminium powder coated  
brushed | incl. flaps for adjustable  
beam angle

0.60kg IP20 0.3°

|        | CODE      |
|--------|-----------|
|        | 331168W_  |
|        | 331168L_  |
|        | 331168G_  |
|        | 331168Q_  |
|        | 331168P_  |
|        | 331168B_  |
| walnut | 331168WN_ |



### 2.0 LED

2x LED 3W | 220-240VAC | 50-60Hz  
PCB 3-step | phase-cut dim  
aluminium powder coated  
brushed | incl. flaps for adjustable  
beam angle

0.67kg IP20 0.3°

|        | CODE      |
|--------|-----------|
|        | 331148W_  |
|        | 331148L_  |
|        | 331148G_  |
|        | 331148Q_  |
|        | 331148P_  |
|        | 331148B_  |
| walnut | 331148WN_ |

### OPTIONAL

QT14 LED 3W

|               | CODE     |
|---------------|----------|
| 2700K   200lm | 9019G705 |
| 3000K   300lm | 9019G703 |

more lamps on page 703

flaps for adjustable beam angle

|  | CODE     |
|--|----------|
|  | 900401W0 |

more lamps and specs on page 703

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 400   >80   | 2    |
| 3000K        | 440   >80   | 4    |
| 1800-2850K   | 400   >80   | 9    |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 2x200   >80 | 2    |
| 3000K        | 2x220   >80 | 4    |
| 1800-2850K   | 2x200   >80 | 9    |










HOTEL DOMAINE DE LA VOISINE | CYRIL DURAND BEHAR ARCHITECTES | LIGHTING DESIGN DISTYLIGHT FRANCE



BOX

WALL SURFACE



3.0 LED

2x LED 3W | 220-240VAC | 50-60Hz  
PCB 3-step | phase-cut dim  
aluminium powder coated  
brushed | incl. flaps for adjustable  
beam angle

0.86kg IP20 0.3°

| CODE |           |
|------|-----------|
|      | 331248W_  |
|      | 331248L_  |
|      | 331248G_  |
|      | 331248Q_  |
|      | 331248P_  |
|      | 331248B_  |
|      | 331248WN_ |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 2x200   >80 | 2    |
| 3000K        | 2x220   >80 | 4    |
| 1800-2850K   | 2x200   >80 | 9    |



UNIVERSAL STARS

# SIMPLE FORMALITY

Even if maths wasn't your favourite subject: You'll love these four stunning geometric shapes. BOX, DOCUS, HEXO, and RAY are hard to beat when it comes to elegance and flexibility. That makes them ideal for virtually any space. Regardless of whether they sparkle from the ceiling or shine from the walls. The sleek, narrow luminaires are available in six great colours, as well as in many different versions. Also for use outdoors. They'll elicit an admiring "wow" from your dear friends and relatives right in the entrance area. Who would have thought that geometry could be so enthralling?




HAVE A LOOK


[weverducre.com/universalstars](https://weverducre.com/universalstars)



BOX



DOCUS




HEXO



RAY

Auch wenn Mathematik nicht Ihr Lieblingsfach war: Diese vier atemberaubenden geometrischen Formen werden Sie lieben. BOX, DOCUS, HEXO und RAY sind in puncto Eleganz und Flexibilität nämlich kaum zu übertreffen. Und deshalb für nahezu jede Raumsituation geeignet. Ganz egal, ob man sie von der Decke blinzeln oder von den Wänden strahlen lässt. Denn die schlichten, schmalen Leuchten sind nicht nur in sechs tollen Farbtönen, sondern auch in vielen verschiedenen Ausführungen erhältlich. Auch für den Außenbereich. So kann man lieben Freunden und Verwandten schon im Eingangsbereich ein staunendes „Wow“ entlocken. Wer hätte gedacht, dass Geometrie so spannend sein kann?






 PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
brushed



more lamps and specs on page 701



 2x PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
brushed



more lamps and specs on page 701





PRIVATE RESIDENCE | CANDICE BRUNY FRANCE

HEXO mini

WALL SURFACE

1.0

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.23kg 36°

|  | CODE     |
|--|----------|
|  | 300420G0 |
|  | 300420Q0 |
|  | 300420P0 |
|  | 300420B0 |

2.0

2x PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.40kg 36°

|  | CODE     |
|--|----------|
|  | 301420G0 |
|  | 301420Q0 |
|  | 301420P0 |
|  | 301420B0 |

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

|            | CODE     |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

|            | CODE     |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701

WEVER & DUCRÉ

514 — 515






# TRAIN

## WALL SURFACE



p. 613

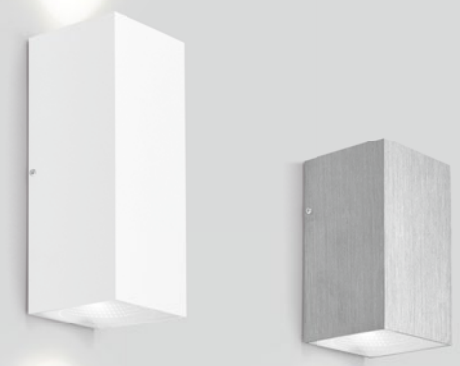

### 1.0

LED 6W | 220-240VAC | 50-60Hz  
COB 3-step | phase-cut dim  
aluminium powder coated  
brushed

0.24kg IP20 36°

2700K | >90 CRI | 390lm

| CODE     |
|----------|
| 306668W3 |
| 306668G3 |
| 306668B3 |

3000K | >90 CRI | 420lm

| CODE     |
|----------|
| 306668W5 |
| 306668L5 |

### 2.0

2x LED 4W | 220-240VAC | 50-60Hz  
COB 3-step | phase-cut dim  
aluminium powder coated  
brushed

0.35kg IP20 36°

2700K | >90 CRI | 2x260lm

| CODE     |
|----------|
| 306768W3 |
| 306768G3 |
| 306768B3 |

3000K | >90 CRI | 2x280lm

| CODE     |
|----------|
| 306768W5 |
| 306768L5 |








# CENTRAL

WALL SURFACE





p. 619



## 1.0

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.56kg IP20 0.3m



## 2.0

2xLED 4W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.5kg IP20 0.3m

|  |  | CODE     |
|--|--|----------|
|  |  | 313574W_ |
|  |  | 313574G_ |
|  |  | 313574B_ |
|  |  | 313574L_ |



| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 480   >90   | 3    |
| 3000K        | 520   >90   | 5    |

|  |  | CODE     |
|--|--|----------|
|  |  | 313674W_ |
|  |  | 313674G_ |
|  |  | 313674B_ |
|  |  | 313674L_ |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 2x240   >90 | 3    |
| 3000K        | 2x260   >90 | 5    |



PRIVATE RESIDENCE | GRAUX & BAEYENS ARCHITECTEN BELGIUM





# STATION

## WALL SURFACE



p. 621



### 1.0

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.52kg | IP20 | 0.3m | 6

3000K | >90 CRI | 520lm

| CODE |          |
|------|----------|
|      | 314574W5 |
|      | 314574L5 |

### 2.0

2x LED 4W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.5kg | IP20 | 0.3m | 6

3000K | >90 CRI | 2x260lm

| CODE |          |
|------|----------|
|      | 314674W5 |
|      | 314674L5 |






HOTEL SALZBURG | AUSTRIA



available from spring 2020

# SARA snooze

WALL SURFACE



## 1.0 PAR16

PAR16 max. 12W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated  
incl. switch on/off

0.329kg IP20 0.3 G

90° 330°

| CODE                                                                                  |          |
|---------------------------------------------------------------------------------------|----------|
|  | 157320W0 |
|  | 157320G0 |
|  | 157320B0 |
|  | 157320K0 |

## OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

| CODE       |          |
|------------|----------|
| 2700K      | 901228W2 |
| 3000K      | 901228W4 |
| 1800-2850K | 901229S9 |

more lamps and specs on page 701









HOTEL MANCHESTER | UNITED KINGDOM


available from autumn 2020

# MICK snooze

WALL SURFACE



DESIGNED BY  
S&R CORNELISSEN



1.0

LED 7.5W | 220-240VAC  
50-60Hz | COB 3-step | incl. PS  
aluminium powder coated  
incl. switch on/off

0.39kg IP20 0.3 P

A 25° C 350° P 90°

| CODE                                                                                  |         |
|---------------------------------------------------------------------------------------|---------|
|  | 159354J |
|  | 159354K |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 190   >90   | 3    |
| 3000K        | 200   >90   | 5    |








# MICK WALL

## WALL SURFACE



DESIGNED BY  
S&R CORNELISSEN

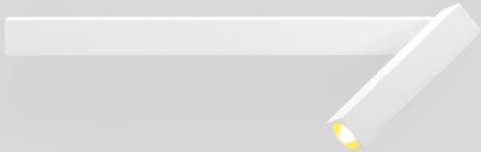

### 1.0

LED 7W | 220-240VAC  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.35kg IP20 0.3° 90°

25° 350° 90°

### 2.0

2x LED 7W | 220-240VAC  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.62kg IP20 0.3° 90°

25° 350° 90°

| CODE    |  |
|---------|--|
| 159354J |  |
| 159354K |  |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 230   >90   | 3    |
| 3000K        | 250   >90   | 5    |

| CODE    |  |
|---------|--|
| 159454J |  |
| 159454K |  |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 2x230   >90 | 3    |
| 3000K        | 2x250   >90 | 5    |

available from autumn 2020







PRIVATE RESIDENCE FINLAND

LEENS

WALL SURFACE



1.0

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

1.1kg IP20 0.3m

3000K | >90 CRI | 300lm

|  | CODE     |
|--|----------|
|  | 311174W5 |
|  | 311174L5 |
|  | 311174B5 |

2.0

2xLED 4W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.90kg IP20 0.3m

3000K | >90 CRI | 2x150lm

|  | CODE     |
|--|----------|
|  | 311274W5 |
|  | 311274L5 |
|  | 311274B5 |



PRIVATE RESIDENCE AUSTRIA

BENTA

WALL SURFACE

180

130

46

360

130

46

1.3

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.73kg

IP20

±0.3

P

3000K | >90 CRI | 310lm

CODE

310174W5

310174B5

3.6

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

1.25kg

IP20

±0.3

P

3000K | >90 CRI | 310lm

CODE

310274W5

310274B5



WEVER & DUCRÉ

532 — 533





BENTO  
WALL SURFACE

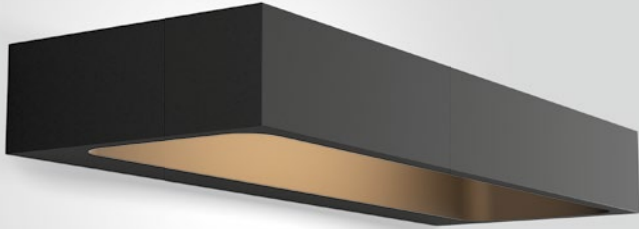


1.3

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.74kg IP20 0.3m

3000K | >90 CRI | 310lm

| CODE     |
|----------|
| 309274W5 |
| 309274B5 |



3.6

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated


1.48kg IP20 0.3m

3000K | >90 CRI | 310lm

| CODE     |
|----------|
| 309374W5 |
| 309374B5 |



INCH  
WALL SURFACE




1.5

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.49kg IP20 0.3

3000K | >80 CRI | 480lm

|  | CODE     |
|--|----------|
|  | 312164W4 |
|  | 312164B4 |




2.6

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.40kg IP20 0.3

3000K | >80 CRI | 480lm

|  | CODE     |
|--|----------|
|  | 312264W4 |
|  | 312264B4 |



5.4

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.65kg IP20 0.3

3000K | >80 CRI | 480lm


|  | CODE     |
|--|----------|
|  | 312364W4 |
|  | 312364B4 |





PRIVATE RESIDENCE AUSTRIA

SCAVA  
WALL SURFACE



1.0

LED 25W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker | phase-cut  
dim | aluminium powder coated  
opal PC cover

0.42kg IP20 0.3m

| CODE |          |
|------|----------|
|      | 350168W_ |
|      | 350168B_ |
|      | 350168K_ |


| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 1100   >90  | 3    |
| 3000K        | 1200   >90  | 5    |

available from summer 2020



MILES

WALL SURFACE



2.0 ROUND

LED 8W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim | aluminium powder  
coated | brushed

0.77kg IP20 0.3m P


marble | walnut

|  | CODE     |
|--|----------|
|  | 317574MW |
|  | 317574MB |
|  | 317574WN |

aluminium

|  | CODE    |
|--|---------|
|  | 317574W |
|  | 317574G |
|  | 317574Q |
|  | 317574P |
|  | 317574B |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 400   | >90 | 3    |
| 3000K        | 430   | >90 | 5    |



3.0 ROUND

LED 8W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim | aluminium powder  
coated | brushed

1.09kg IP20 0.3m P

marble | walnut

|  | CODE     |
|--|----------|
|  | 317774MW |
|  | 317774MB |
|  | 317774WN |

aluminium

|  | CODE    |
|--|---------|
|  | 317774W |
|  | 317774G |
|  | 317774Q |
|  | 317774P |
|  | 317774B |



| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 400   | >90 | 3    |
| 3000K        | 430   | >90 | 5    |





# MILES

WALL SURFACE



## 2.0 CARRÉ

LED 8W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim | aluminium powder coated | brushed

1.03kg IP20 S+0.3+D P

marble | walnut

|  | CODE      |
|--|-----------|
|  | 317474MW_ |
|  | 317474MB_ |
|  | 317474WN_ |

aluminium

|  | CODE     |
|--|----------|
|  | 317474W_ |
|  | 317474G_ |
|  | 317474Q_ |
|  | 317474P_ |
|  | 317474B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 400   | >90 | 3    |
| 3000K        | 430   | >90 | 5    |

## 3.0 CARRÉ

LED 8W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim | aluminium powder coated | brushed

1.63kg IP20 S+0.3+D P

marble | walnut

|  | CODE      |
|--|-----------|
|  | 317674MW_ |
|  | 317674MB_ |
|  | 317674WN_ |

aluminium

|  | CODE     |
|--|----------|
|  | 317674W_ |
|  | 317674G_ |
|  | 317674Q_ |
|  | 317674P_ |
|  | 317674B_ |



| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 400   | >90 | 3    |
| 3000K        | 430   | >90 | 5    |





# MILES

WALL SURFACE



## 9.0

LED 30W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. power supply  
phase-cut dim | aluminium powder  
coated | brushed

2.13kg IP20 0.3m

marble | walnut

|  | CODE      |
|--|-----------|
|  | 317274MW_ |
|  | 317274MB_ |
|  | 317274WN_ |

aluminium

|  | CODE     |
|--|----------|
|  | 317274W_ |
|  | 317274L_ |
|  | 317274G_ |
|  | 317274B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 1480  | >90 | 3    |
| 3000K        | 1600  | >90 | 5    |

## 12.0

LED 38W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. power supply  
phase-cut dim | aluminium powder  
coated | brushed

2.62kg IP20 0.3m

marble | walnut

|  | CODE      |
|--|-----------|
|  | 317374MW_ |
|  | 317374MB_ |
|  | 317374WN_ |

aluminium

|  | CODE     |
|--|----------|
|  | 317374W_ |
|  | 317374L_ |
|  | 317374G_ |
|  | 317374B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 2050  | >90 | 3    |
| 3000K        | 2200  | >90 | 5    |





FELIX HOTEL | SPACE CONTROL DESIGN MASCOT | AUSTRALIA


ARZY

WALL SURFACE



reddot design award  
winner 2010

DESIGNED BY  
FRANK JANSSENS



1.0

LED 6W | 220-240VAC | 50-60Hz  
COB 3-step | incl. power supply  
stainless steel | powder coated  
chrome

1.56kg | IP20 |  $\pm 0.3^\circ$  |  $\odot$


3000K | >80 CRI | 380lm

| CODE                                                                                  |          |
|---------------------------------------------------------------------------------------|----------|
|  | 325163W4 |
|  | 325163C4 |
|  | 325163B4 |





EST LIGHTING SHOWROOM | CHRISTOPHER ELLIOT DESIGN MELBOURNE | AUSTRALIA

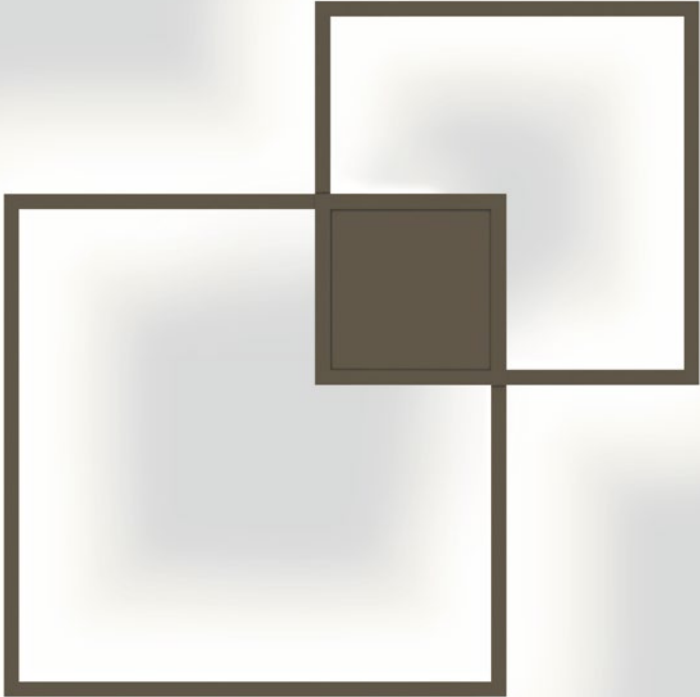

VENN

WALL SURFACE




p. 335

p. 441



DESIGNED  
BY S&R CORNELISSEN



1.0

LED 38W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. power supply  
aluminium powder coated  
opal PMMA cover | indirect

2.50kg IP20 0.3m P


phase-cut dim

| CODE |          |
|------|----------|
|      | 149184W_ |
|      | 149184Q_ |
|      | 149184B_ |

DALI dim

| CODE |          |
|------|----------|
|      | 149185W_ |
|      | 149185Q_ |
|      | 149185B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 2100  | >80 | 2    |
| 3000K        | 2250  | >80 | 4    |



2.0

LED 47W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. power supply  
aluminium powder coated  
opal PMMA cover | direct/indirect

2.50kg IP20 0.3m P

phase-cut dim

| CODE |          |
|------|----------|
|      | 149284W_ |
|      | 149284Q_ |
|      | 149284B_ |

DALI dim

| CODE |          |
|------|----------|
|      | 149285W_ |
|      | 149285Q_ |
|      | 149285B_ |

| LIGHT COLOUR | LUMEN    | CRI | CODE |
|--------------|----------|-----|------|
| 2700K        | 370/2100 | >80 | 2    |
| 3000K        | 400/2250 | >80 | 4    |








available from autumn 2020

FINLIN  
WALL SURFACE

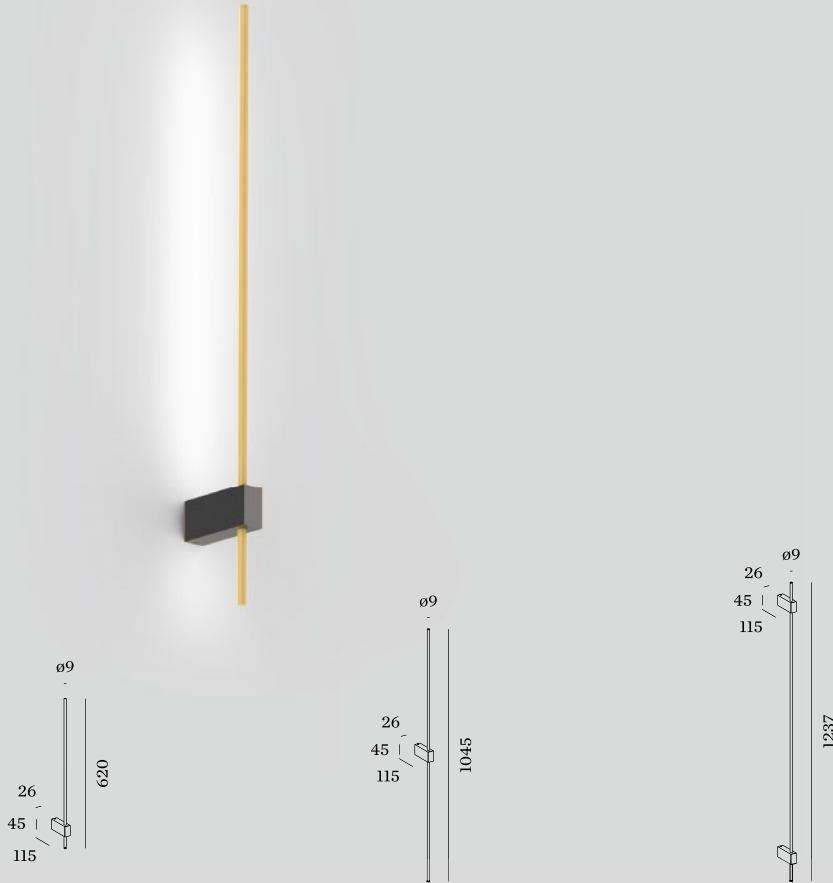

1.0

LED 6W | 220-240VAC  
50-60Hz | PCB 3-step  
phase-cut dim | incl. PS  
aluminium powder coated  
opal PMMA diffuser

0.15kg IP20 0.3m

|  | CODE    |
|--|---------|
|  | 370184B |
|  | 370184K |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 350   | >90 | 3    |
| 3000K        | 380   | >90 | 5    |

2.0

LED 12W | 220-240VAC  
50-60Hz | PCB 3-step  
phase-cut dim | incl. PS  
aluminium powder coated  
opal PMMA diffuser

0.18kg IP20 0.3m

|  | CODE    |
|--|---------|
|  | 370284B |
|  | 370284K |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 700   | >90 | 3    |
| 3000K        | 760   | >90 | 5    |

3.0

LED 12W | 220-240VAC  
50-60Hz | PCB 3-step  
phase-cut dim | incl. PS  
aluminium powder coated  
opal PMMA diffuser

0.30kg IP20 0.3m

|  | CODE    |
|--|---------|
|  | 370384B |
|  | 370384K |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 700   | >90 | 3    |
| 3000K        | 760   | >90 | 5    |

4.0


LED 12W | 220-240VAC  
50-60Hz | PCB 3-step  
phase-cut dim | incl. PS  
aluminium powder coated  
opal PMMA diffuser

0.20kg IP20 0.3m

|  | CODE    |
|--|---------|
|  | 370484B |
|  | 370484K |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 700   | >90 | 3    |
| 3000K        | 760   | >90 | 5    |



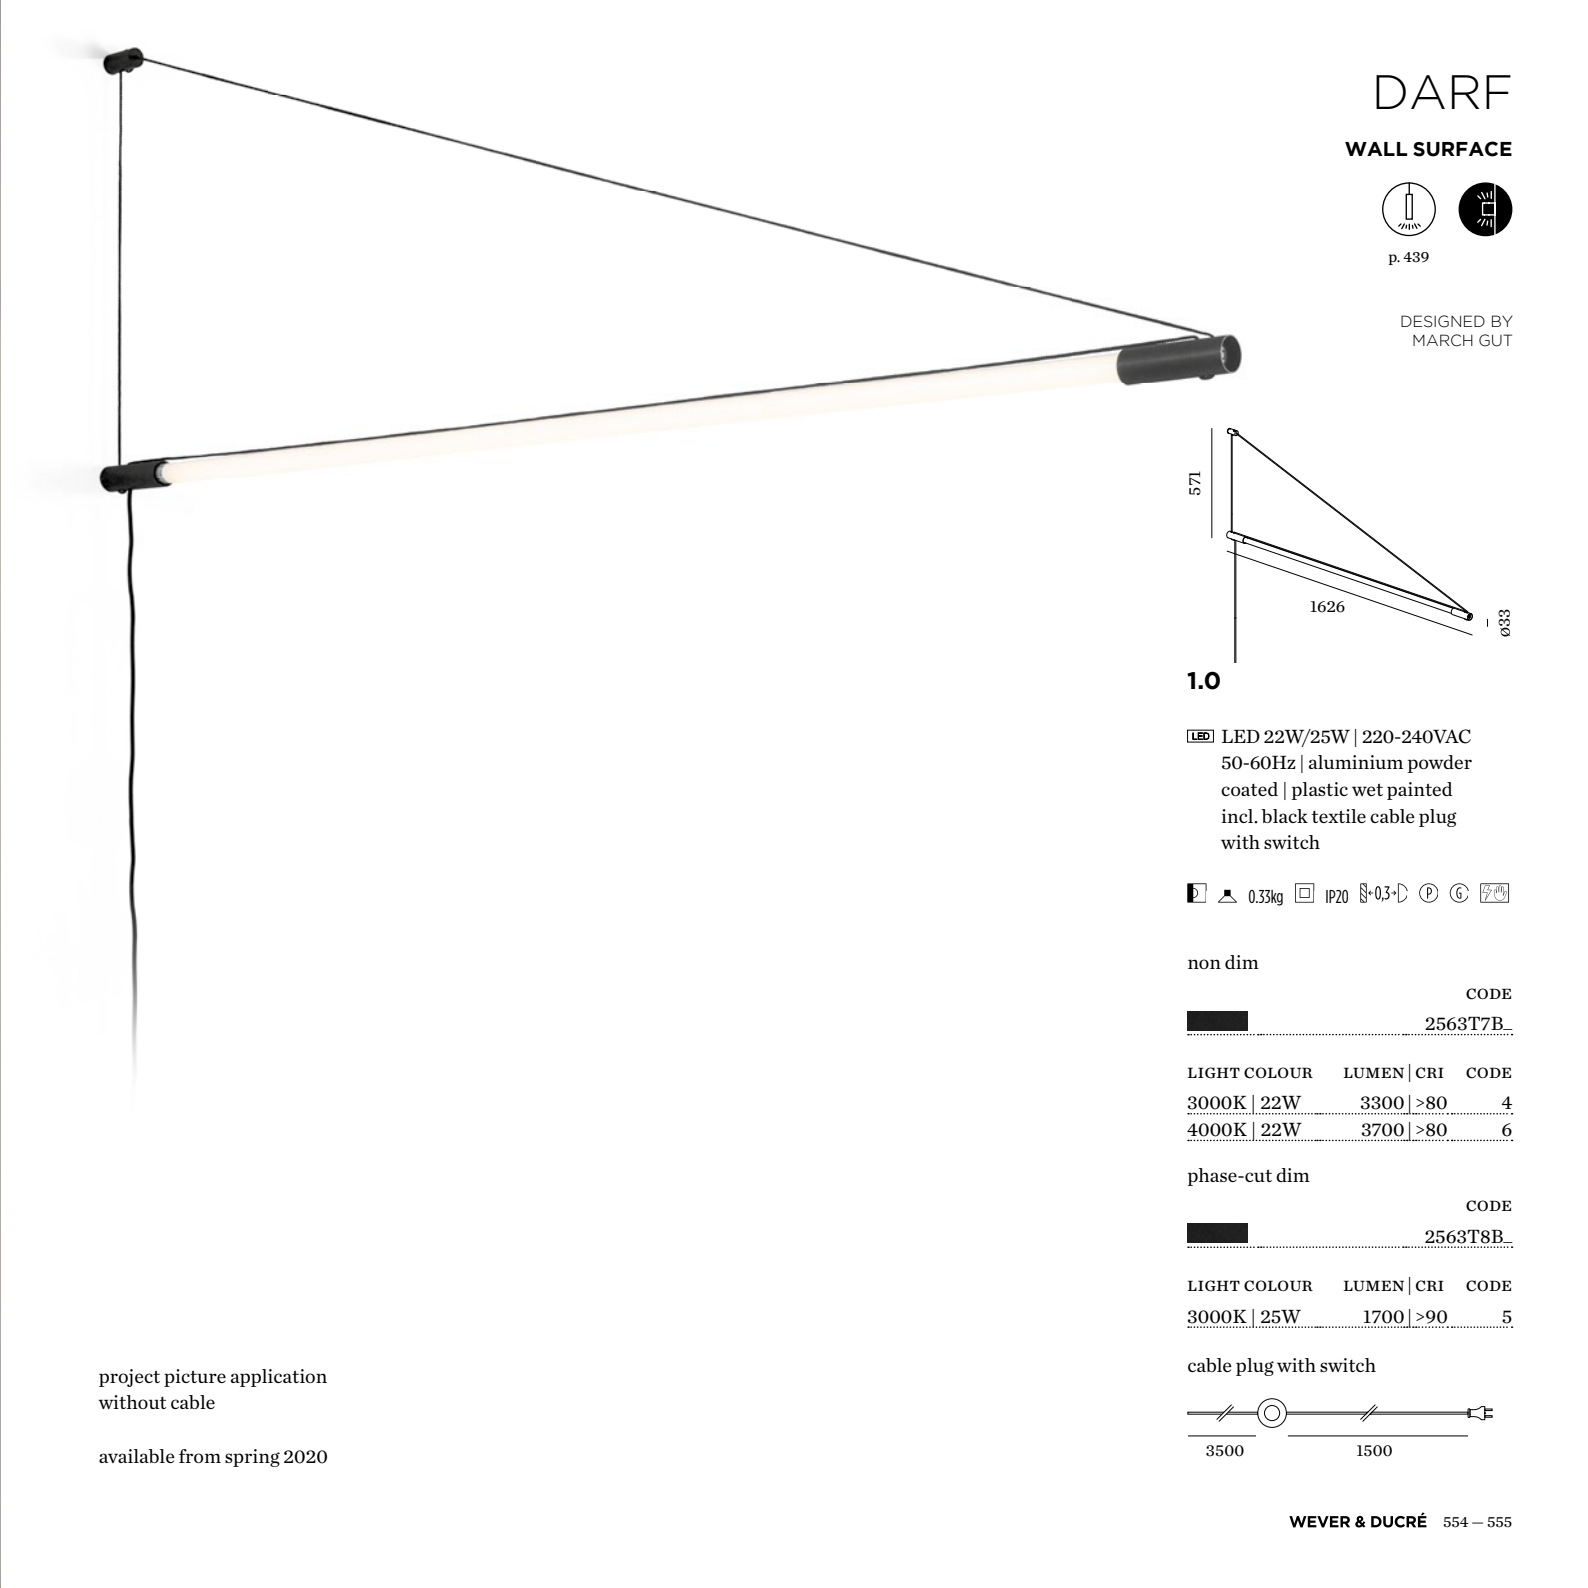


# DARF

## WALL SURFACE



p. 439

DESIGNED BY  
MARCH GUT



1.0

LED 22W/25W | 220-240VAC  
50-60Hz | aluminium powder  
coated | plastic wet painted  
incl. black textile cable plug  
with switch

0.33kg IP20 0.3 P C

non dim

| CODE    |
|---------|
| 2563T7B |


| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K   22W  | 3300  | >80 | 4    |
| 4000K   22W  | 3700  | >80 | 6    |

phase-cut dim

| CODE    |
|---------|
| 2563T8B |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K   25W  | 1700  | >90 | 5    |

cable plug with switch



project picture application  
without cable


available from spring 2020



# LIGHTDROP IP44

WALL SURFACE

DESIGNED BY  
STUDIO MANGO



## 1.2

QT14 max. 40W | G9  
220-240VAC | 50-60Hz  
powder coated | chrome plated

0.41kg IP44 0.3m

| CODE                                                                                  |          |
|---------------------------------------------------------------------------------------|----------|
|  | 3071V0W0 |
|  | 3071V0C0 |
|  | 3071V0B0 |

## OPTIONAL

QT14 LED 3W

| CODE          |          |
|---------------|----------|
| 2700K   200lm | 9019G705 |

more lamps and specs on page 703






RESTAURANT GOTHENBURG SWEDEN

# MIRBA IP44

WALL SURFACE




## 1.0 LED

LED 9W | 220-240VAC  
PCB 3-step | output selector  
phase-cut dim  
aluminium powder coated  
opal PMMA cover

Icon: Light, Dimmer, Fan, Speaker, Weight 0.51kg, IP44, 0.3m, P

| CODE                                                                                  |         |
|---------------------------------------------------------------------------------------|---------|
|  | 328184W |
|  | 328184E |

| LIGHT COLOUR | LUMEN       | CRI | CODE |
|--------------|-------------|-----|------|
| 2700K        | L 320/H 560 | >90 | 3    |
| 3000K        | L 360/H 620 | >90 | 5    |




## 2.0 LED

LED 12W | 220-240VAC  
PCB 3-step | output selector  
phase-cut dim  
aluminium powder coated  
opal PMMA cover

Icon: Light, Dimmer, Fan, Speaker, Weight 0.65kg, IP44, 0.3m, P

| CODE                                                                                  |         |
|---------------------------------------------------------------------------------------|---------|
|  | 328284W |
|  | 328284E |

| LIGHT COLOUR | LUMEN       | CRI | CODE |
|--------------|-------------|-----|------|
| 2700K        | L 530/H 820 | >90 | 3    |
| 3000K        | L 590/H 900 | >90 | 5    |



## 3.0 LED

LED 18W | 220-240VAC  
PCB 3-step | output selector  
phase-cut dim  
aluminium powder coated  
opal PMMA cover

Icon: Light, Dimmer, Fan, Speaker, Weight 0.69kg, IP44, 0.3m, P

| CODE                                                                                  |         |
|---------------------------------------------------------------------------------------|---------|
|  | 328384W |
|  | 328384E |

| LIGHT COLOUR | LUMEN        | CRI | CODE |
|--------------|--------------|-----|------|
| 2700K        | L 610/H 1050 | >90 | 3    |
| 3000K        | L 680/H 1150 | >90 | 5    |






# MIRBI long IP44

WALL SURFACE



p. 261

p. 329



## 1.0

LED 4/6W | 220-240VAC  
PCB 3-step | output selector  
phase-cut dim  
aluminium powder coated  
clear + opal PMMA cover

0.72kg IP44 0.3°

| CODE |          |
|------|----------|
|      | 329184W_ |

| LIGHT COLOUR | LUMEN      | CRI | CODE |
|--------------|------------|-----|------|
| 2700K        | L190/H 300 | >90 | 3    |
| 3000K        | L210/H 330 | >90 | 5    |

## 2.0

LED 7/12W | 220-240VAC  
PCB 3-step | output selector  
phase-cut dim  
aluminium powder coated  
clear + opal PMMA cover

1.53kg IP44 0.3°

| CODE |          |
|------|----------|
|      | 329284W_ |

| LIGHT COLOUR | LUMEN      | CRI | CODE |
|--------------|------------|-----|------|
| 2700K        | L320/H 550 | >90 | 3    |
| 3000K        | L365/H 620 | >90 | 5    |

## 3.0

LED 12/18W | 220-240VAC  
PCB 3-step | output selector  
phase-cut dim  
aluminium powder coated  
clear + opal PMMA cover

2.25kg IP44 0.3°

| CODE |          |
|------|----------|
|      | 329384W_ |

| LIGHT COLOUR | LUMEN      | CRI | CODE |
|--------------|------------|-----|------|
| 2700K        | L550/H 750 | >90 | 3    |
| 3000K        | L610/H 840 | >90 | 5    |



OUT

DOOR

# CEILING RECESSED

p. 567

CEILING  
RECESSED



**INTRA**  
p. 567







PRIVATE RESIDENCE | ARCHITECT KILLIAN GARTNER | INTERIOR & LIGHT DESIGN ROOMS ATELIER AUSTRIA

# INTRA

OUTDOOR  
CEILING RECESSED



## 1.0 OPAL

LED 7W | 220-240VAC  
PCB 3-step | phase-cut dim  
aluminium | stainless steel  
opal glass | polyamide

0.15kg IP65 0.3m 2

76-78 70 2-25

|  | CODE     |
|--|----------|
|  | 733168W_ |
|  | 733168L_ |
|  | 733168D_ |
|  | 733168B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 350   | >90 | 5    |

## 2.0 SPOT

LED 7W | 220-240VAC  
PCB 3-step | phase-cut dim  
aluminium | stainless steel  
clear lens | polyamide

0.15kg IP65 0.3m 2 38°

76-78 70 2-25

|  | CODE     |
|--|----------|
|  | 733158W_ |
|  | 733158L_ |
|  | 733158D_ |
|  | 733158B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 590   | >80 | 4    |

# CEILING SURFACE

p. 571 — 585

## CEILING SURFACE SPOTLIGHTS



**TRAM ROUND**  
p. 571



**TUBE**  
p. 573




**RAY**  
p. 575



**TRAM CARRÉ**  
p. 571



**TUBE CARRÉ**  
p. 577



**BOX**  
p. 579

## CEILING SURFACE LUMINAIRES



**ROB**  
p. 583



**BLAS 1.0**  
p. 585



**BLAS 2.0**  
p. 585





PRIVATE RESIDENCE AUSTRIA

available from summer 2020




TRAM

OUTDOOR  
CEILING SURFACE



p. 595



1.0 ROUND

 LED 6W | 220-240VAC | 50-60Hz  
COB 3-step | phase-cut dim  
aluminium powder coated

  0.24kg  IP65  3°-0.3°-D  36°

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 747368W_ |
|  | 747368A_ |
|  | 747368B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 420   | >90 | 5    |

1.0 CARRÉ

 LED 6W | 220-240VAC | 50-60Hz  
COB 3-step | phase-cut dim  
aluminium powder coated

  0.26kg  IP65  3°-0.3°-D  36°

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 747468W_ |
|  | 747468A_ |
|  | 747468B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 420   | >90 | 5    |



PRIVATE RESIDENCE | HERZBLUT DESIGN AUSTRIA

TUBE

OUTDOOR  
CEILING SURFACE

p. 597

ø80

105

ø80

105

1.0 LED

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | phase-cut dim  
aluminium powder coated

0.53kg

IP65

3~0.3~D

G

38°

734164W

734164D

734164B

LIGHT COLOUR

LUMEN | CRI

CODE

3000K

440 | >80

4

1.0 PAR16

PAR16 max. 5W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated

0.60kg

IP65

3~0.3~D

G

734120W0

734120D0

734120B0

OPTIONAL

PAR16 LED GU10 4.3W | phase-cut dim

CODE

2700K

905227S2

3000K

905227S4

more lamps and specs on page 701

WEVER & DUCRÉ 572 — 573





SHOP PHILMODE | ARCHITECT ERIC FRANSENS BEAUFAYS | BELGIUM



OPTIONAL

inner cover

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 911041W1 |
|  | 911041D1 |
|  | 911041B1 |

RAY

OUTDOOR  
CEILING SURFACE



p. 267



p. 367

p. 377




p. 401



p. 497



p. 601



1.0

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | phase-cut dim  
aluminium powder coated

0.63kg IP65 32°

| CODE                                                                                           |
|------------------------------------------------------------------------------------------------|
|  735364W_ |
|  735364D_ |
|  735364B_ |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 580   >80   | 2    |
| 3000K        | 610   >80   | 4    |
| 1800-2850K   | 390   >95   | 9    |





# TUBE CARRÉ

OUTDOOR  
CEILING SURFACE



p. 603



## 1.0 LED

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.64kg IP65 0.3 6 38°

|  | CODE    |
|--|---------|
|  | 734264W |
|  | 734264D |
|  | 734264B |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 380   >90   | 5    |

## 1.0 PAR16

PAR16 max. 5W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated

0.69kg IP65 0.3 6

|  | CODE     |
|--|----------|
|  | 734220W0 |
|  | 734220D0 |
|  | 734220B0 |

## OPTIONAL

PAR16 LED GU10 4.3W | phase-cut dim  
CODE

|       |          |
|-------|----------|
| 2700K | 905227S2 |
| 3000K | 905227S4 |

more lamps and specs on page 701





PRIVATE RESIDENCE FRANCE



inner  
reflector



inner  
cover

OPTIONAL

single inner reflector

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 911211W1 |
|  | 911211Q1 |
|  | 911211D1 |
|  | 911211B1 |

inner cover

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 911011W1 |
|  | 911011Q1 |
|  | 911011D1 |
|  | 911011B1 |

BOX

OUTDOOR  
CEILING SURFACE



p. 275




p. 393



p. 505



p. 607



1.0

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | phase-cut dim  
aluminium powder coated

0.67kg IP65 0.3-32°


|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 735164W_ |
|  | 735164Q_ |
|  | 735164D_ |
|  | 735164B_ |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 580   >80   | 2    |
| 3000K        | 610   >80   | 4    |
| 1800-2850K   | 390   >95   | 9    |









1.6

LED 13W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim | aluminium  
powder coated | opal PMMA cover

0.70kg IP44 0.3m

| CODE |          |  |
|------|----------|--|
|      | 701184W_ |  |


| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 860   | >90 | 3    |
| 3000K        | 950   | >90 | 5    |

OPTIONAL

dimmer

| CODE         |          |
|--------------|----------|
| for switch   | 90019017 |
| for din rail | 90019018 |

more specs on page 699



2.6

LED 18W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim | aluminium  
powder coated | opal PMMA cover

1.20kg IP44 0.3m

| CODE |          |  |
|------|----------|--|
|      | 701284W_ |  |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 1250  | >90 | 3    |
| 3000K        | 1380  | >90 | 5    |

OPTIONAL

dimmer


| CODE         |          |
|--------------|----------|
| for switch   | 90019017 |
| for din rail | 90019018 |

more specs on page 699

ROB  
OUTDOOR  
CEILING SURFACE



p. 323



3.5

LED 32W | 220-240VAC | 50-60Hz  
PCB 3-step low flicker  
phase-cut dim | aluminium  
powder coated | opal PMMA cover

1.90kg IP44 0.3m

| CODE |          |  |
|------|----------|--|
|      | 701384W_ |  |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 1820  | >90 | 3    |
| 3000K        | 1950  | >90 | 5    |

OPTIONAL

dimmer

| CODE         |          |
|--------------|----------|
| for switch   | 90019017 |
| for din rail | 90019018 |



more specs on page 699



PRIVATE RESIDENCE | PETER RANEBURGER AUSTRIA



BLAS  
OUTDOOR  
CEILING SURFACE



1.0

LED 8W | 220-240VAC | 50-60Hz  
PCB 3-step | phase-cut dim  
aluminium powder coated | glass

1 kg IP65 0.3

| CODE |          |  |  |
|------|----------|--|--|
|      | 736187W_ |  |  |
|      | 736187D_ |  |  |
|      | 736187B_ |  |  |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 640   | >80 | 4    |

2.0

LED 8W | 220-240VAC | 50-60Hz  
PCB 3-step | phase-cut dim  
aluminium powder coated | glass

1.3 kg IP65 0.3

| CODE |          |  |  |
|------|----------|--|--|
|      | 736287W_ |  |  |
|      | 736287D_ |  |  |
|      | 736287B_ |  |  |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 640   | >80 | 4    |



# WALL RECESSED

p. 589 — 591

WALL  
RECESSED



**SMILE IN 1.0**  
p. 589



**SMILE IN 2.0**  
p. 589



**ORIS 0.7**  
p. 591



**ORIS 2.0**  
p. 591




# SMILE IN

OUTDOOR  
WALL RECESSED



p. 475



## 1.0

LED 4/6W | 350/500mA | 9Vf  
COB 3-step | excl. power supply  
aluminium powder coated

0.39kg IP65 0.3 6

86 40 min 13

| CODE    |  |
|---------|--|
| 702151W |  |
| 702151D |  |

| LIGHT COLOUR | LUMEN   CRI   | CODE |
|--------------|---------------|------|
| 3000K        | 230/320   >80 | 4    |

## ALWAYS USE


power supply IP67

| CODE       |          |
|------------|----------|
| 350mA   7W | 90213301 |
| 500mA   7W | 90214301 |

more power supplies on page 699

## OPTIONAL

| CODE          |          |
|---------------|----------|
| recessed ring | 90012030 |



## 2.0

LED 4/6W | 350/500mA | 9Vf  
COB 3-step | excl. power supply  
aluminium powder coated

0.42kg IP65 0.3 6

86 40 min 13

| CODE    |  |
|---------|--|
| 703151W |  |
| 703151D |  |

| LIGHT COLOUR | LUMEN   CRI   | CODE |
|--------------|---------------|------|
| 3000K        | 230/320   >80 | 4    |

## ALWAYS USE

power supply IP67

| CODE       |          |
|------------|----------|
| 350mA   7W | 90213301 |
| 500mA   7W | 90214301 |

more power supplies on page 699


## OPTIONAL

| CODE          |          |
|---------------|----------|
| recessed ring | 90012030 |





PRIVATE RESIDENCE | SPADO ARCHITECTS AUSTRIA



0.7

LED 1/2W | 350/700mA | 3Vf  
PCB 3-step | excl. power supply  
aluminium powder coated

0.28kg IP65 0.3+D 6

47x182 40 4-40

|  | CODE    |
|--|---------|
|  | 709161W |
|  | 709161D |
|  | 709161B |

| LIGHT COLOUR | LUMEN   CRI  | CODE |
|--------------|--------------|------|
| 3000K        | 90/150   >80 | 4    |

ALWAYS USE


power supply IP66

|            | CODE     |
|------------|----------|
| 350mA   3W | 90213101 |
| 700mA   3W | 90215101 |

more power supplies on page 699

OPTIONAL

|                                      | CODE     |
|--------------------------------------|----------|
| recessed housing<br>incl. plasterkit | 90012039 |
| concrete<br>housing                  | 90012044 |



1.3

LED 2/4W | 350/700mA | 6Vf  
PCB 3-step | excl. power supply  
aluminium powder coated

0.34kg IP65 0.3+D 6

115x117 40 4-40

|  | CODE    |
|--|---------|
|  | 709261W |
|  | 709261D |
|  | 709261B |

| LIGHT COLOUR | LUMEN   CRI   | CODE |
|--------------|---------------|------|
| 3000K        | 180/300   >80 | 4    |

ALWAYS USE

power supply IP66

|            | CODE     |
|------------|----------|
| 350mA   3W | 90213101 |
| 700mA   7W | 90215301 |

more power supplies on page 699


OPTIONAL

|                                      | CODE     |
|--------------------------------------|----------|
| recessed housing<br>incl. plasterkit | 90012041 |
| concrete<br>housing                  | 90012040 |

ORIS  
OUTDOOR  
WALL RECESSED



p. 485



2.0

LED 2/4W | 350/700mA | 6Vf  
PCB 3-step | excl. power supply  
aluminium powder coated

0.42kg IP65 0.3+D 6

115x185 40 4-40

|  | CODE    |
|--|---------|
|  | 709361W |
|  | 709361D |
|  | 709361B |

| LIGHT COLOUR | LUMEN   CRI   | CODE |
|--------------|---------------|------|
| 3000K        | 180/300   >80 | 4    |

ALWAYS USE

power supply IP66

|            | CODE     |
|------------|----------|
| 350mA   3W | 90213101 |
| 700mA   7W | 90215301 |

more power supplies on page 699

OPTIONAL

|                                      | CODE     |
|--------------------------------------|----------|
| recessed housing<br>incl. plasterkit | 90012043 |
| concrete<br>housing                  | 90012042 |

## WALL SURFACE SPOTLIGHTS



**TRAM**  
p. 595



**TUBE**  
p. 597



**RAY**  
p. 601



**TUBE CARRÉ**  
p. 603



**BOX**  
p. 607



**TRAIN**  
p. 613



**TRAIN NARROW**  
p. 617




**CENTRAL**  
p. 619



**STATION**  
p. 621



**BOXX**  
p. 623



**X-BEAM**  
p. 625

## WALL SURFACE LUMINAIRES




**SMILE ON 1.0**  
p. 627



**SMILE ON 2.0**  
p. 627



**SMILE**  
p. 629




**TAPE**  
p. 631



**SWAM**  
p. 633



**GETTON 1.0**  
p. 635



**GETTON 2.0**  
p. 635



**PALOS 1.0**  
p. 637



**PALOS 2.0**  
p. 637

# WALL SURFACE

p. 595 — 637





PRIVATE RESIDENCE AUSTRIA


available from summer 2020

TRAM

OUTDOOR  
WALL SURFACE



p. 571



1.0


LED 6W | 220-240VAC | 50-60Hz  
COB 3-step | phase-cut dim  
aluminium powder coated



36°

| CODE |          |  |
|------|----------|--|
|      | 747168W_ |  |
|      | 747168A_ |  |
|      | 747168B_ |  |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 420   >90   | 5    |



2.0

2xLED 4W | 220-240VAC | 50-60Hz  
COB 3-step | phase-cut dim  
aluminium powder coated



36°

| CODE |          |  |
|------|----------|--|
|      | 747268W_ |  |
|      | 747268A_ |  |
|      | 747268B_ |  |



| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 2x280   >90 | 5    |





HOTEL VALAMAR GIRANDELLA RESORT | STUDIO 92 RABAC | CROATIA

TUBE  
OUTDOOR  
WALL SURFACE



1.0 LED

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.45kg IP65 0.3m 38°

| CODE |         |  |
|------|---------|--|
|      | 711164W |  |
|      | 711164D |  |
|      | 711164B |  |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 390   >90   | 5    |

1.0 PAR16

PAR16 max. 5W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated

0.52kg IP65 0.3m

| CODE |          |  |
|------|----------|--|
|      | 711120W0 |  |
|      | 711120D0 |  |
|      | 711120B0 |  |

OPTIONAL

PAR16 LED GU10 4.3W | phase-cut dim  
CODE

|       |          |
|-------|----------|
| 2700K | 905227S2 |
| 3000K | 905227S4 |

more lamps and specs on page 701







PRIVATE RESIDENCE LITHUNIA



TUBE  
OUTDOOR  
WALL SURFACE



p. 573



2.0 LED

2x LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.74kg IP65 38°

|  | CODE    |
|--|---------|
|  | 711264W |
|  | 711264D |
|  | 711264B |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 2x390   >90 | 5    |

2.0 PAR16

2x PAR16 max. 5W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated

0.90kg IP65 38°

|  | CODE     |
|--|----------|
|  | 711220W0 |
|  | 711220D0 |
|  | 711220B0 |

OPTIONAL

PAR16 LED GU10 4.3W | phase-cut dim  
CODE



|       |          |
|-------|----------|
| 2700K | 905227S2 |
| 3000K | 905227S4 |

more lamps and specs on page 701





RAY  
OUTDOOR  
WALL SURFACE




1.0

LED 6W | 220-240VAC | 50-60Hz  
PCB 3-step | phase-cut dim  
aluminium powder coated  
incl. flaps for adjustable beam angle



| CODE |  |  |          |
|------|--|--|----------|
|      |  |  | 741168W_ |
|      |  |  | 741168D_ |
|      |  |  | 741168B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 400   | >80 | 2    |
| 3000K        | 440   | >80 | 4    |




2.0

2x LED 3W | 220-240VAC | 50-60Hz  
PCB 3-step | phase-cut dim  
aluminium powder coated  
incl. flaps for adjustable beam angle



| CODE |  |  |          |
|------|--|--|----------|
|      |  |  | 741148W_ |
|      |  |  | 741148D_ |
|      |  |  | 741148B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 2x200 | >80 | 2    |
| 3000K        | 2x220 | >80 | 4    |




3.0

LED 6W | 220-240VAC | 50-60Hz  
PCB 3-step | phase-cut dim  
aluminium powder coated  
incl. flaps for adjustable beam angle



| CODE |  |  |          |
|------|--|--|----------|
|      |  |  | 741268W_ |
|      |  |  | 741268D_ |
|      |  |  | 741268B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 400   | >80 | 2    |
| 3000K        | 440   | >80 | 4    |



4.0

2x LED 3W | 220-240VAC | 50-60Hz  
PCB 3-step | phase-cut dim  
aluminium powder coated  
incl. flaps for adjustable beam angle






| CODE |  |  |          |
|------|--|--|----------|
|      |  |  | 741248W_ |
|      |  |  | 741248D_ |
|      |  |  | 741248B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 2x200 | >80 | 2    |
| 3000K        | 2x220 | >80 | 4    |





PRIVATE RESIDENCE | SIGGE ARCHITECTS, ANTTI KORPI | LIGHTING DESIGN TECLUX OY + SIGGE / ANTTI KORPI FINLAND



1.0 LED

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.66kg IP65 38°

|  | CODE    |
|--|---------|
|  | 744164W |
|  | 744164D |
|  | 744164B |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 390   >90   | 5    |

1.0 PAR16

PAR16 max. 5W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated

0.71kg IP65 38°

|  | CODE     |
|--|----------|
|  | 744120W0 |
|  | 744120D0 |
|  | 744120B0 |

OPTIONAL

PAR16 LED GU10 4.3W | phase-cut dim  
CODE

|       |          |
|-------|----------|
| 2700K | 905227S2 |
| 3000K | 905227S4 |

more lamps and specs on page 701

TUBE CARRÉ

OUTDOOR  
WALL SURFACE

p. 577







PRIVATE RESIDENCE | SPADDO ARCHITECTS AUSTRIA

# TUBE CARRÉ

OUTDOOR  
WALL SURFACE



## 2.0 LED

2x LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

1kg IP65 0.3m 38°

| CODE |         |
|------|---------|
|      | 744264W |
|      | 744264D |
|      | 744264B |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 2x390   >90 | 5    |

## 2.0 PAR16

2x PAR16 max. 5W | GU10  
100-240VAC | 50-60Hz  
aluminium powder coated

1.05kg IP65 0.3m

| CODE |          |
|------|----------|
|      | 744220W0 |
|      | 744220D0 |
|      | 744220B0 |

## OPTIONAL

PAR16 LED GU10 4.3W | phase-cut dim  
CODE

|       |          |
|-------|----------|
| 2700K | 905227S2 |
| 3000K | 905227S4 |




more lamps and specs on page 701





BOX

OUTDOOR  
WALL SURFACE



1.0

LED 6W | 220-240VAC | 50-60Hz  
PCB 3-step | phase-cut dim  
aluminium powder coated  
incl. flaps for adjustable beam angle



| CODE                                                                                  |          |
|---------------------------------------------------------------------------------------|----------|
|  | 740168W_ |
|  | 740168Q_ |
|  | 740168D_ |
|  | 740168B_ |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 400   >80   | 2    |
| 3000K        | 440   >80   | 4    |

2.0

2x LED 3W | 220-240VAC | 50-60Hz  
PCB 3-step | phase-cut dim  
aluminium powder coated  
incl. flaps for adjustable beam angle



| CODE                                                                                  |          |
|---------------------------------------------------------------------------------------|----------|
|  | 740148W_ |
|  | 740148Q_ |
|  | 740148D_ |
|  | 740148B_ |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 2x200   >80 | 2    |
| 3000K        | 2x220   >80 | 4    |












BOX

OUTDOOR  
WALL SURFACE

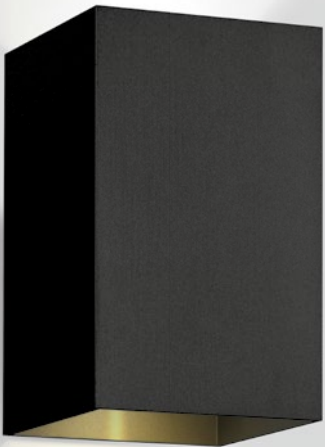

3.0

LED 6W | 220-240VAC | 50-60Hz  
PCB 3-step | phase-cut dim  
aluminium powder coated  
incl. flaps for adjustable beam angle

0.67kg IP65 0.3°

| CODE     |  |
|----------|--|
| 740268W_ |  |
| 740268Q_ |  |
| 740268D_ |  |
| 740268B_ |  |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 400   >80   | 2    |
| 3000K        | 440   >80   | 4    |

4.0

2x LED 3W | 220-240VAC | 50-60Hz  
PCB 3-step | phase-cut dim  
aluminium powder coated  
incl. flaps for adjustable beam angle

0.86kg IP65 0.3°

| CODE     |  |
|----------|--|
| 740248W_ |  |
| 740248Q_ |  |
| 740248D_ |  |
| 740248B_ |  |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 2x200   >80 | 2    |
| 3000K        | 2x220   >80 | 4    |





PRIVATE RESIDENCE | MOVING HOUSE | PILZARCHITEKTUR AUSTRIA

TRAIN

OUTDOOR  
WALL SURFACE

p. 517

1.0

LED 6W | 220-240VAC | 50-60Hz  
COB 3-step | phase-cut dim  
aluminium powder coated

0.24kg IP65  $\varnothing$  0.3°

38°

|  | CODE     |
|--|----------|
|  | 719868W_ |
|  | 719868D_ |
|  | 719868B_ |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 420   >90   | 5    |

2.0

2xLED 4W | 220-240VAC | 50-60Hz  
COB 3-step | phase-cut dim  
aluminium powder coated

0.35kg IP65  $\varnothing$  0.3°

38°

|  | CODE     |
|--|----------|
|  | 719968W_ |
|  | 719968D_ |
|  | 719968B_ |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 2x280   >90 | 5    |

WEVER & DUCRÉ

612 — 613





PRIVATE RESIDENCE CZECH REPUBLIC









PRIVATE RESIDENCE OBUMEX – STEENOVEN BELGIUM

# TRAIN NARROW

OUTDOOR  
WALL SURFACE



## 1.0

 LED 6W | 220-240VAC | 50-60Hz  
COB 3-step | incl. power supply  
aluminium powder coated

  0.24kg  IP65  5°

narrow up or narrow down

| CODE                                                                                  |          |  |
|---------------------------------------------------------------------------------------|----------|--|
|  | 719143D_ |  |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 120   >80   | 4    |

## 2.0

 2x LED 3W | 220-240VAC | 50-60Hz  
COB 3-step | incl. power supply  
aluminium powder coated

  0.35kg  IP65  5°

narrow up | narrow down

| CODE                                                                                  |          |  |
|---------------------------------------------------------------------------------------|----------|--|
|  | 719243D_ |  |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 2x75   >80  | 4    |

narrow up | flood down

| CODE                                                                                  |          |  |
|---------------------------------------------------------------------------------------|----------|--|
|  | 719253D_ |  |

| LIGHT COLOUR | LUMEN   CRI  | CODE |
|--------------|--------------|------|
| 3000K        | 80/200   >80 | 4    |






PRIVATE RESIDENCE UNITED KINGDOM

CENTRAL

OUTDOOR  
WALL SURFACE






p. 519



1.0

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.91kg IP65 0.3m 6



2.0

2x LED 4W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.91kg IP65 0.3m 6

| CODE |          |  |  |
|------|----------|--|--|
|      | 313774W_ |  |  |
|      | 313774D_ |  |  |
|      | 313774A_ |  |  |
|      | 313774B_ |  |  |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 520   >90   | 5    |

| CODE |          |  |  |
|------|----------|--|--|
|      | 313874W_ |  |  |
|      | 313874D_ |  |  |
|      | 313874A_ |  |  |
|      | 313874B_ |  |  |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 2x260   >90 | 5    |





PRIVATE RESIDENCE AUSTRIA

STATION

OUTDOOR  
WALL SURFACE

p. 521

**1.0**

**2.0**

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.86kg IP65 3-0,3° 6

CODE

314774D\_

314774B\_

LIGHT COLOUR

LUMEN | CRI

CODE

3000K

520 | >90

5

2xLED 4W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.80kg IP65 3-0,3° 6

CODE

314874D\_

314874B\_

LIGHT COLOUR

LUMEN | CRI

CODE

3000K

2x260 | >90

5

WEVER & DUCRÉ 620 – 621






PRIVATE RESIDENCE | ARCHITECT REFUGE FRANCE

BOXX

OUTDOOR  
WALL SURFACE



1.0

2x 2xLED 3W | 220-240VAC  
50-60Hz | PCB 3-step  
phase-cut dim | aluminium powder  
coated | incl. flaps for adjustable  
beam angle

0.93kg | IP65 | 0.3° |

| CODE |          |
|------|----------|
|      | 739148W_ |
|      | 739148D_ |
|      | 739148B_ |


| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 2700K        | 2x400   >80 | 2    |
| 3000K        | 2x440   >80 | 4    |





# X-BEAM

OUTDOOR  
WALL SURFACE



## 1.0

LED 18W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

LED 18W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated


0.3m | 120° | 0/110°

| CODE |  |  |         |
|------|--|--|---------|
|      |  |  | 700364D |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 1040   >80  | 4    |

## OPTIONAL

| CODE  |          |
|-------|----------|
| snoot | 90019023 |



## 2.0

LED 16W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

LED 16W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.3m | 15° | 0/110°

| CODE |  |  |         |
|------|--|--|---------|
|      |  |  | 700354D |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 895   >80   | 4    |

## OPTIONAL

| CODE  |          |
|-------|----------|
| snoot | 90019023 |







PRIVATE RESIDENCE SWEDEN

# SMILE ON

OUTDOOR  
WALL SURFACE



## 1.0

LED 6W | 220-240VAC | 50-60Hz  
COB 3-step | phase-cut dim  
aluminium powder coated

0.43kg IP65 0.3m 5

| CODE |          |  |  |
|------|----------|--|--|
|      | 702258W_ |  |  |
|      | 702258D_ |  |  |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 370   | >90 | 5    |

## 2.0

LED 6W | 220-240VAC | 50-60Hz  
COB 3-step | phase-cut dim  
aluminium powder coated

0.65kg IP65 0.3m 5

| CODE |          |  |  |
|------|----------|--|--|
|      | 703258W_ |  |  |
|      | 703258D_ |  |  |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 370   | >90 | 5    |





PRIVATE RESIDENCE | SALENS ARCHITECTEN BELGIUM

# SMILE

OUTDOOR  
WALL SURFACE



p. 675

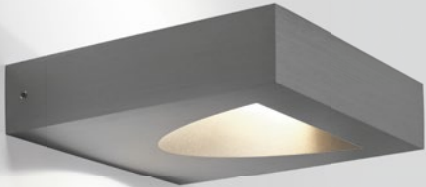

## 1.0

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

1.02kg IP65

| CODE |          |
|------|----------|
|      | 703354W_ |
|      | 703354D_ |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 360   >90   | 5    |

## 2.0

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.87kg IP65

| CODE |          |
|------|----------|
|      | 703454W_ |
|      | 703454D_ |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 360   >90   | 5    |





PRIVATE RESIDENCE | HERZBLUT DESIGN AUSTRIA

TAPE

OUTDOOR  
WALL SURFACE

1.0

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.73kg IP65

CODE

722174W\_

722174D\_

LIGHT COLOUR

LUMEN | CRI

CODE

3000K

420 | >90

5

WEVER & DUCRÉ

630 – 631






9 JEFFREY'S PLACE LONDON | UNITED KINGDOM

available from autumn 2020

SWAM

OUTDOOR  
WALL SURFACE




1.0

LED 8W | 220-240VAC  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.95kg IP65 0.3

| CODE    |  |
|---------|--|
| 746274K |  |
| 746274B |  |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 210   | >90 | 3    |



1.1

LED 13W | 220-240VAC  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.95kg IP65 0.3




| CODE    |  |
|---------|--|
| 746374K |  |
| 746374B |  |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 350   | >90 | 3    |





PRIVATE RESIDENCE AUSTRIA



GETTON

OUTDOOR  
WALL SURFACE



p. 669

1.0

LED 8W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
opal glass

0.83kg IP65 0.3 4

| CODE |         |
|------|---------|
|      | 717474W |
|      | 717474D |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 665   >80   | 4    |

OPTIONAL

big cover

| CODE |          |
|------|----------|
|      | 911141W1 |
|      | 911141D1 |

more details on page 716

2.0

LED 8W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
clear glass

0.83kg IP65 0.3 4

| CODE |         |
|------|---------|
|      | 717374W |
|      | 717374D |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 720   >80   | 4    |

OPTIONAL

big cover

| CODE |          |
|------|----------|
|      | 911141W1 |
|      | 911141D1 |

more details on page 716








# PALOS

OUTDOOR  
WALL SURFACE



p. 681

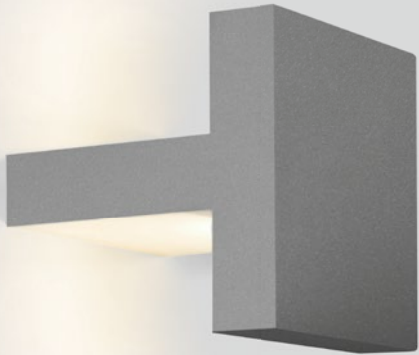

## 1.0

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

1.55kg IP65 0.3m

| CODE |         |  |  |
|------|---------|--|--|
|      | 716174W |  |  |
|      | 716174D |  |  |
|      | 716174A |  |  |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 520   | >90 | 5    |

## 2.0

2x LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

1.86kg IP65 0.3m

| CODE |         |  |  |
|------|---------|--|--|
|      | 716274W |  |  |
|      | 716274D |  |  |
|      | 716274A |  |  |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 2x520 | >90 | 5    |



# FLOOR RECESSED

p. 641 — 649

FLOOR  
RECESSED



**CARD 0.1**  
p. 641




**MAP**  
p. 643



**MAP ASYM**  
p. 645



**CARD 0.2**  
p. 641



**CHART**  
p. 647



**CHART ASYM**  
p. 649



# CARD

OUTDOOR  
FLOOR RECESSED



## 0.1

LED 1W | 350mA | 3Vf  
PCB 3-step | excl. power supply  
stainless steel | glass | 0.9m cable  
aluminium powder coated


IP67 IK07 0.05kg 16° 22-24 60

CODE 750161L

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 50    | >80 | 4    |

## ALWAYS USE

power supply IP66  
CODE 350mA | 3W 90213101



## 0.2

LED 1W | 350mA | 3Vf  
PCB 3-step | excl. power supply  
stainless steel | glass | 0.9m cable  
aluminium powder coated

IP67 IK07 0.06kg 16° 22-24 60

CODE 750261L

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 50    | >80 | 4    |

## ALWAYS USE


power supply IP66  
CODE 350mA | 3W 90213101







MAP  
OUTDOOR  
FLOOR RECESSED



0.6

LED 5W | 220-240VAC | 50-60Hz  
COB 3-step | incl. power supply  
stainless steel | glass | 1.6m cable  
aluminium powder coated

0.38kg IP67 IK08 0.3° 16


38° 41 100

CODE  
751163L

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 220   | >80 | 4    |

OPTIONAL

CODE  
ground housing 90012201



0.9

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
stainless steel | glass | 1.6m cable  
aluminium powder coated

0.70kg IP67 IK08 0.3° 16


38° 78 135

CODE  
751264L

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 470   | >80 | 4    |

OPTIONAL

CODE  
ground housing 90012202



1.2

LED 12W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
stainless steel | glass | 1.6m cable  
aluminium powder coated

1.01kg IP67 IK08 0.3° 16


38° 110 120

CODE  
751364L

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 750   | >80 | 4    |

OPTIONAL

CODE  
ground housing 90012203



1.6

LED 15W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
stainless steel | glass | 1.6m cable  
aluminium powder coated

1.01kg IP67 IK09 0.3° 16

41° 150 185

CODE  
751464L

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 1030  | >80 | 4    |

OPTIONAL

CODE  
ground housing 90012204





PRIVATE RESIDENCE OBUMEX - STEENOVEN BELGIUM

# MAP ASYM

OUTDOOR  
FLOOR RECESSED



1.2

LED 10W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
stainless steel | glass | 1.6m cable  
aluminium powder coated

1.06kg IP67 IK08 3+0.3

110 160

asymmetric reflector

| CODE |         |  |
|------|---------|--|
|      | 751557L |  |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 450   >80   | 4    |

## OPTIONAL

| CODE           |          |  |
|----------------|----------|--|
| ground housing | 90012203 |  |



1.6

LED 15W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
stainless steel | glass | 1.6m cable  
aluminium powder coated

1.72kg IP67 IK09 3+0.3

150 185

asymmetric reflector

| CODE |         |  |
|------|---------|--|
|      | 751657L |  |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 550   >80   | 4    |

## OPTIONAL

| CODE           |          |  |
|----------------|----------|--|
| ground housing | 90012204 |  |








# CHART

## OUTDOOR FLOOR RECESSED



0.6

LED 5W | 220-240VAC | 50-60Hz  
COB 3-step | incl. power supply  
stainless steel | glass | 1.6m cable  
aluminium powder coated

0.39kg IP67 IK08 0.3° 16


38° 45 118

CODE  
752163I

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 220   | >80 | 4    |

### OPTIONAL

CODE  
ground housing 90012201



0.9

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
stainless steel | glass | 1.6m cable  
aluminium powder coated

0.70kg IP67 IK08 0.3° 16


38° 78 135

CODE  
752264I

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 470   | >80 | 4    |

### OPTIONAL

CODE  
ground housing 90012202



1.2

LED 12W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
stainless steel | glass | 1.6m cable  
aluminium powder coated

1.05kg IP67 IK08 0.3° 16


38° 110 175

CODE  
752364I

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 750   | >80 | 4    |

### OPTIONAL

CODE  
ground housing 90012203



1.6

LED 15W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
stainless steel | glass | 1.6m cable  
aluminium powder coated

1.05kg IP67 IK09 0.3° 16

41° 150 185

CODE  
752464I

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 1030  | >80 | 4    |

### OPTIONAL


CODE  
ground housing 90012204





# CHART ASYM

OUTDOOR  
FLOOR RECESSED



1.2

LED 10W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
stainless steel | glass | 1.6m cable  
aluminium powder coated

1.10kg IP67 IK08 0.3m

110 160


asymmetric reflector

CODE  
752557L

LIGHT COLOUR LUMEN | CRI CODE  
3000K 450 | >80 4

## OPTIONAL

CODE  
ground housing 90012203



1.6

LED 15W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
stainless steel | glass | 1.6m cable  
aluminium powder coated

1.83kg IP67 IK09 0.3m

150 185

asymmetric reflector

CODE  
752657L

LIGHT COLOUR LUMEN | CRI CODE  
3000K 550 | >80 4

## OPTIONAL

CODE  
ground housing 90012204





## FLOOR SURFACE PROJECTOR



**STIPO 1.0**  
p. 653



**STIPO 4.0**  
p. 653



**STAKE FOLD**  
p. 655



**X-BEAM**  
p. 657



**STAKE**  
p. 659

## FLOOR SURFACE LUMINAIRES



**COSTA 2.0**  
p. 661



**COSTA 1.0**  
p. 663

## FLOOR SURFACE BOLLARD



**SWAM**  
p. 667



**GETTON**  
p. 669



**TAPE**  
p. 671



**PACE**  
p. 673



**SMILE**  
p. 675



**FIFTY FIFTY**  
p. 677



**SWAY**  
p. 679



**PALOS 1.0**  
p. 681



**PALOS 2.0**  
p. 681



**EDGE**  
p. 683



**LINUS**  
p. 685




**PALLUZ C**  
p. 687

# FLOOR SURFACE

p. 653 — 687



STIPO  
OUTDOOR  
FLOOR PROJECTOR




1.0

LED 7W | 220-240VAC | 50/60Hz  
COB 3-step | aluminium powder  
coated | 2.0m cable

0.5 kg IP65 3°-0.3°-135°  
38°

| CODE |          |
|------|----------|
|      | 737157D_ |
|      | 737157Y_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 460   | >80 | 4    |




2.0

LED 7W | 220-240VAC | 50/60Hz  
COB 3-step | aluminium powder  
coated | 2.0m cable

0.49 kg IP65 3°-0.3°-135°  
38°

| CODE |          |
|------|----------|
|      | 737267D_ |
|      | 737267Y_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 460   | >80 | 4    |



3.0

LED 7W | 220-240VAC | 50/60Hz  
COB 3-step | aluminium powder  
coated | 2.0m cable

0.5 kg IP65 3°-0.3°-135°  
38°

| CODE |          |
|------|----------|
|      | 737357D_ |
|      | 737357Y_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 460   | >80 | 4    |

ALWAYS USE

pole 200 excl. spike

| CODE |          |
|------|----------|
|      | 910062D0 |
|      | 910062Y0 |

pole 400 excl. spike

|  |          |
|--|----------|
|  | 910064D0 |
|  | 910064Y0 |

pole 600 excl. spike


|  |          |
|--|----------|
|  | 910066D0 |
|  | 910066Y0 |

pole 800 excl. spike

|  |          |
|--|----------|
|  | 910068D0 |
|  | 910068Y0 |

OPTIONAL

| CODE         |          |
|--------------|----------|
| ground spike | 90013106 |



4.0

LED 7W | 220-240VAC | 50/60Hz  
COB 3-step | aluminium powder  
coated | 2.0m cable

0.49 kg IP65 3°-0.3°-135°  
38°

| CODE |          |
|------|----------|
|      | 737467D_ |
|      | 737467Y_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 460   | >80 | 4    |

ALWAYS USE

pole 200 excl. spike

| CODE |          |
|------|----------|
|      | 910062D0 |
|      | 910062Y0 |

pole 400 excl. spike

|  |          |
|--|----------|
|  | 910064D0 |
|  | 910064Y0 |

pole 600 excl. spike

|  |          |
|--|----------|
|  | 910066D0 |
|  | 910066Y0 |

pole 800 excl. spike

|  |          |
|--|----------|
|  | 910068D0 |
|  | 910068Y0 |

OPTIONAL

| CODE         |          |
|--------------|----------|
| ground spike | 90013106 |






PRIVATE RESIDENCE BELGIUM

# STAKE FOLD

OUTDOOR  
FLOOR PROJECTOR



## 1.0

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.78kg IP65 0.3m

0/90°

CODE  
727274D

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 460   >90   | 5    |

## OPTIONAL

|              | CODE     |
|--------------|----------|
| ground spike | 90013107 |
| snoot        | 90019004 |








PRIVATE RESIDENCE AUSTRIA

# X-BEAM

OUTDOOR  
FLOOR PROJECTOR



## 1.0

LED 18W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

LED, COB, PS, phase-cut dim, aluminium powder coated, 1.28kg, IP65


0.3m | 120° | 0/110°

| CODE |  |  |          |
|------|--|--|----------|
|      |  |  | 700364D_ |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 1040   >80  | 4    |

## OPTIONAL

|              | CODE     |
|--------------|----------|
| ground spike | 90013115 |
| snoot        | 90019023 |



## 2.0

LED 16W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

LED, PCB, PS, phase-cut dim, aluminium powder coated, 1.28kg, IP65

0.3m | 15° | 0/110°

| CODE |  |  |          |
|------|--|--|----------|
|      |  |  | 700354D_ |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 895   >80   | 4    |

## OPTIONAL

|              | CODE     |
|--------------|----------|
| ground spike | 90013115 |
| snoot        | 90019023 |









PRIVATE RESIDENCE AUSTRIA

# STAKE

OUTDOOR  
FLOOR PROJECTOR



## 1.0

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
1.0m cable

0.55kg IP65 0.3m 0/90°

| CODE |  |  |          |
|------|--|--|----------|
|      |  |  | 727174D_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 460   | >90 | 5    |

## 2.0

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.50kg IP65 0.3m 0/90°

| CODE |  |  |          |
|------|--|--|----------|
|      |  |  | 727374D_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 460   | >90 | 5    |

### ALWAYS USE

| CODE     |          |
|----------|----------|
| base 200 | 910042D0 |
| base 400 | 910044D0 |

### OPTIONAL

| CODE         |          |
|--------------|----------|
| ground spike | 90013106 |
| snoot        | 90019004 |

### OPTIONAL



| CODE         |          |
|--------------|----------|
| ground spike | 90013107 |
| snoot        | 90019004 |







HOTEL YURBBAN BARCELONA | SPAIN

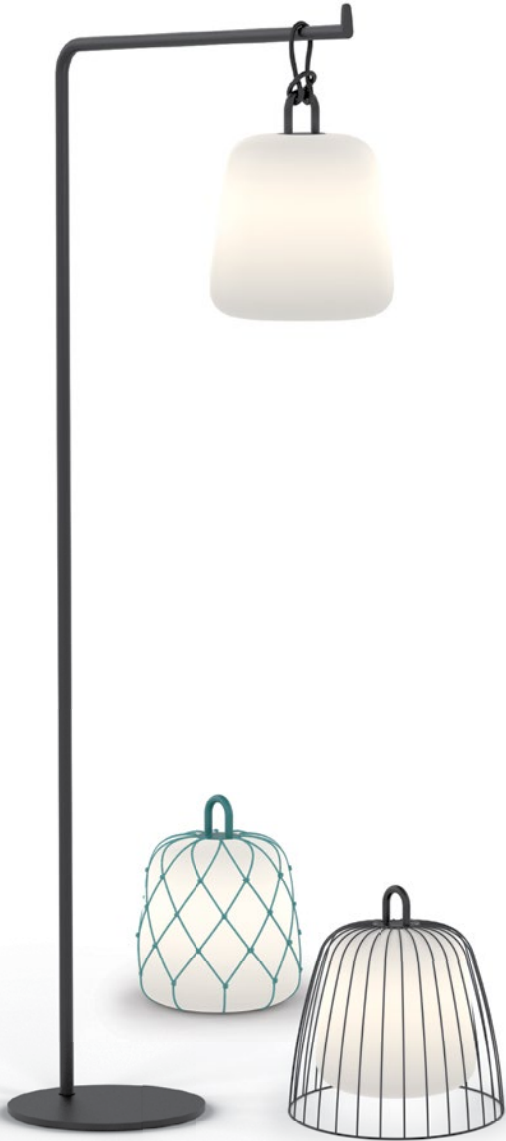


2.0 LED

2x LED channels 1.5W | 120lm  
110-220VAC | 2200-4000K  
rechargeable li-ion battery  
incl. charger | light for 8 hours  
recharging time 5 hours  
polyethylene | polypropylene


LED icon, battery icon, weight icon 1.10kg, IP65 icon

| handle colour                                                                         | CODE      |
|---------------------------------------------------------------------------------------|-----------|
|  | 865286YE9 |
|  | 865286OR9 |
|  | 865286SB9 |
|  | 865286OB9 |




OPTIONAL

| 2.0 rope                                                                              | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 90057192 |
|  | 90057191 |
|  | 90057193 |
|  | 90057190 |



OPTIONAL

| 2.1 cage                                                                              | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 90057182 |
|  | 90057181 |
|  | 90057183 |
|  | 90057180 |

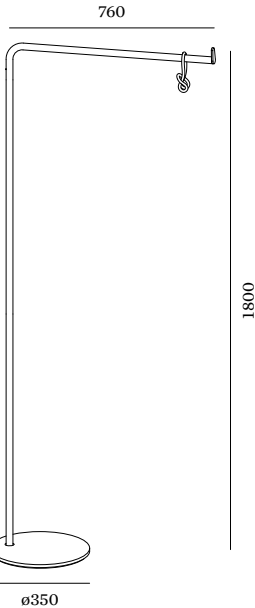

OPTIONAL

| pole                                                                                  | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 90056001 |

COSTA

OUTDOOR  
FLOOR SURFACE







PRIVATE RESIDENCE AUSTRIA



1.0  
yellow




1.0  
orange



1.0  
light blue



1.0  
black



1.0 LED

2x LED channels 1.5W | 120lm  
110-220VAC | 2200-4000K  
rechargeable li-ion battery  
incl. charger | light for 8 hours  
recharging time 5 hours  
polyethylene | polypropylene

0.90kg IP65

handle colour


|                                                                                       | CODE      |
|---------------------------------------------------------------------------------------|-----------|
|  | 865186YE9 |
|  | 865186OR9 |
|  | 865186SB9 |
|  | 865186OB9 |



OPTIONAL

1.0 rope

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 90057171 |
|  | 90057170 |

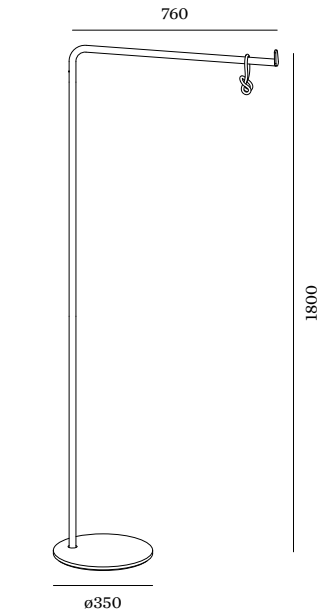

OPTIONAL

pole

|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 90056001 |

COSTA  
OUTDOOR  
FLOOR SURFACE







PRIVATE RESIDENCE AUSTRIA



available from autumn 2020



1.0

LED 8W | 220-240VAC  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated


0.85kg IP65 0.3 P

| CODE |  |         |  |
|------|--|---------|--|
|      |  | 746174K |  |
|      |  | 746174B |  |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 2700K        | 170   | >90 | 3    |

OPTIONAL


| ground fixation plate |  | CODE     |
|-----------------------|--|----------|
|                       |  | 90019019 |



ALWAYS USE

base straight in black

|          |  | CODE     |
|----------|--|----------|
| base 400 |  | 910090B0 |
| base 600 |  | 910091B0 |
| base 800 |  | 910092B0 |



ALWAYS USE

base curved in black

|          |  | CODE     |
|----------|--|----------|
| base 400 |  | 910093B0 |
| base 600 |  | 910094B0 |
| base 800 |  | 910095B0 |

SWAM

OUTDOOR  
FLOOR SURFACE




p. 633




GETTON

OUTDOOR  
FLOOR SURFACE



p. 635



1.0

LED 8W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.80kg IP65  $\approx 0.3^\circ$  G

opal glass

CODE  
717574D\_


LIGHT COLOUR LUMEN | CRI CODE  
3000K 665 | >80 4

ALWAYS USE

CODE  
base 400 910052D0  
base 600 910054D0  
base 800 910058D0

OPTIONAL

CODE  
ground spike 90013101



2.0

LED 8W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.80kg IP65  $\approx 0.3^\circ$  G

clear glass

CODE  
717674D\_

LIGHT COLOUR LUMEN | CRI CODE  
3000K 720 | >80 4

ALWAYS USE

CODE  
base 400 910052D0  
base 600 910054D0  
base 800 910058D0

OPTIONAL



CODE  
ground spike 90013101





# TAPE

OUTDOOR  
FLOOR SURFACE

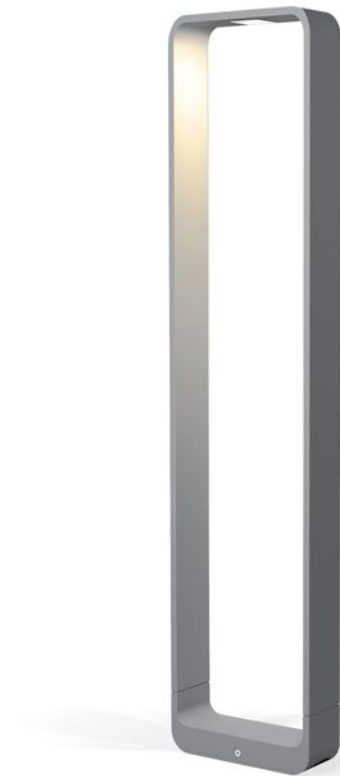

4.0

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated


1.92kg IP65 0.3m

| CODE |         |  |
|------|---------|--|
|      | 722274W |  |
|      | 722274D |  |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 420   >90   | 5    |

## OPTIONAL

| CODE         |          |
|--------------|----------|
| ground spike | 90013102 |



6.0

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated


2.60kg IP65 0.3m

| CODE |         |  |
|------|---------|--|
|      | 722374W |  |
|      | 722374D |  |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 420   >90   | 5    |

## OPTIONAL

| CODE         |          |
|--------------|----------|
| ground spike | 90013102 |



8.0

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

3.10kg IP65 0.3m

| CODE |         |  |
|------|---------|--|
|      | 722474W |  |
|      | 722474D |  |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 420   >90   | 5    |

## OPTIONAL


| CODE         |          |
|--------------|----------|
| ground spike | 90013102 |





# PACE

OUTDOOR  
FLOOR SURFACE



## 4.0

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated


1.00kg IP65 0.3m

|  | CODE    |
|--|---------|
|  | 723174W |
|  | 723174D |
|  | 723174B |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 420   | >90 | 5    |

## OPTIONAL

|              | CODE     |
|--------------|----------|
| ground spike | 90013102 |



## 6.0

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

1.33kg IP65 0.3m

|  | CODE    |
|--|---------|
|  | 723274W |
|  | 723274D |
|  | 723274B |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 420   | >90 | 5    |

## OPTIONAL

|              | CODE     |
|--------------|----------|
| ground spike | 90013102 |



## 8.0

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

1.61kg IP65 0.3m

|  | CODE    |
|--|---------|
|  | 723374W |
|  | 723374D |
|  | 723374B |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 420   | >90 | 5    |

## OPTIONAL

|              | CODE     |
|--------------|----------|
| ground spike | 90013102 |






PRIVATE RESIDENCE | SIGGE ARCHITECTS, ANTTI KORPI | LIGHTING DESIGN TEBLUX OY + SIGGE / ANTTI KORPI, FINLAND

SMILE

OUTDOOR  
FLOOR SURFACE



p. 629



1.0

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

1.15kg IP65 0.3m

| CODE |          |
|------|----------|
|      | 703554D_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 360   | >80 | 4    |


ALWAYS USE

base with fixation plate

| CODE      |          |
|-----------|----------|
| base 300  | 910013D0 |
| base 400  | 910014D0 |
| base 600  | 910016D0 |
| base 800  | 910018D0 |
| base 1000 | 910010D0 |

base with concrete fixation

| CODE      |          |
|-----------|----------|
| base 300  | 910073D0 |
| base 400  | 910074D0 |
| base 600  | 910076D0 |
| base 800  | 910078D0 |
| base 1000 | 910070D0 |



2.0

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.95kg IP65 0.3m

| CODE |          |
|------|----------|
|      | 703654D_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 360   | >80 | 4    |

ALWAYS USE

base with fixation plate

| CODE      |          |
|-----------|----------|
| base 300  | 910013D0 |
| base 400  | 910014D0 |
| base 600  | 910016D0 |
| base 800  | 910018D0 |
| base 1000 | 910010D0 |

base with concrete fixation



| CODE      |          |
|-----------|----------|
| base 300  | 910073D0 |
| base 400  | 910074D0 |
| base 600  | 910076D0 |
| base 800  | 910078D0 |
| base 1000 | 910070D0 |





# FIFTY FIFTY

OUTDOOR  
FLOOR SURFACE



## 1.0

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

1.20kg IP65 0.3-1.0

| CODE |          |
|------|----------|
|      | 756174D_ |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 360   >80   | 4    |

## ALWAYS USE

base with fixation plate

| CODE      |          |
|-----------|----------|
| base 300  | 910013D0 |
| base 400  | 910014D0 |
| base 600  | 910016D0 |
| base 800  | 910018D0 |
| base 1000 | 910010D0 |

base with concrete fixation

| CODE      |          |
|-----------|----------|
| base 300  | 910073D0 |
| base 400  | 910074D0 |
| base 600  | 910076D0 |
| base 800  | 910078D0 |
| base 1000 | 910070D0 |

## 2.0

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.98kg IP65 0.3-1.0

| CODE |          |
|------|----------|
|      | 756274D_ |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 360   >80   | 4    |

## ALWAYS USE

base with fixation plate

| CODE      |          |
|-----------|----------|
| base 300  | 910013D0 |
| base 400  | 910014D0 |
| base 600  | 910016D0 |
| base 800  | 910018D0 |
| base 1000 | 910010D0 |

base with concrete fixation

| CODE      |          |
|-----------|----------|
| base 300  | 910073D0 |
| base 400  | 910074D0 |
| base 600  | 910076D0 |
| base 800  | 910078D0 |
| base 1000 | 910070D0 |







RENARKER MANCHESTER | UNITED KINGDOM

# SWAY

OUTDOOR  
FLOOR SURFACE



## 1.0

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

1.01kg IP54 0.3 6

140°/140°

| CODE |  |          |
|------|--|----------|
|      |  | 720174D_ |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 520   >80   | 4    |

### ALWAYS USE

base with fixation plate

| CODE      |          |
|-----------|----------|
| base 300  | 910013D0 |
| base 400  | 910014D0 |
| base 600  | 910016D0 |
| base 800  | 910018D0 |
| base 1000 | 910010D0 |

base with concrete fixation

| CODE      |          |
|-----------|----------|
| base 300  | 910073D0 |
| base 400  | 910074D0 |
| base 600  | 910076D0 |
| base 800  | 910078D0 |
| base 1000 | 910070D0 |

## 2.0

2x LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

1.10kg IP54 0.3 6

140°/140°

| CODE |  |          |
|------|--|----------|
|      |  | 720274D_ |

| LIGHT COLOUR | LUMEN   CRI | CODE |
|--------------|-------------|------|
| 3000K        | 2x520   >80 | 4    |

### ALWAYS USE

base with fixation plate


| CODE      |          |
|-----------|----------|
| base 300  | 910013D0 |
| base 400  | 910014D0 |
| base 600  | 910016D0 |
| base 800  | 910018D0 |
| base 1000 | 910010D0 |

base with concrete fixation

| CODE      |          |
|-----------|----------|
| base 300  | 910073D0 |
| base 400  | 910074D0 |
| base 600  | 910076D0 |
| base 800  | 910078D0 |
| base 1000 | 910070D0 |








1.0

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

1.40kg IP65 0.3

|  | CODE    |
|--|---------|
|  | 716374D |
|  | 716374A |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 520   | >90 | 5    |



2.0

2x LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

1.40kg IP65 0.3

|  | CODE    |
|--|---------|
|  | 716474D |
|  | 716474A |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 2x520 | >90 | 5    |

ALWAYS USE

base with fixation plate  
base 300

|  | CODE     |
|--|----------|
|  | 910013D0 |
|  | 910013A0 |

base 400

|  |          |
|--|----------|
|  | 910014D0 |
|  | 910014A0 |

base 600

|  |          |
|--|----------|
|  | 910016D0 |
|  | 910016A0 |

base 800

|  |          |
|--|----------|
|  | 910018D0 |
|  | 910018A0 |

base 1000

|  |          |
|--|----------|
|  | 910010D0 |
|  | 910010A0 |

ALWAYS USE

base with concrete fixation  
base 300

|  | CODE     |
|--|----------|
|  | 910073D0 |
|  | 910073A0 |

base 400

|  |          |
|--|----------|
|  | 910074D0 |
|  | 910074A0 |

base 600

|  |          |
|--|----------|
|  | 910076D0 |
|  | 910076A0 |

base 800


|  |          |
|--|----------|
|  | 910078D0 |
|  | 910078A0 |

base 1000

|  |          |
|--|----------|
|  | 910070D0 |
|  | 910070A0 |








2.0

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | phase-cut dim  
aluminium powder coated

2.41kg IP65 0.3m 6

CODE  
721174D

LIGHT COLOUR LUMEN | CRI CODE  
3000K 480 | >80 4




4.0

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | phase-cut dim  
aluminium powder coated

3.34kg IP65 0.3m 6

CODE  
721274D

LIGHT COLOUR LUMEN | CRI CODE  
3000K 480 | >80 4




6.0

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | phase-cut dim  
aluminium powder coated

4.45kg IP65 0.3m 6

CODE  
721474D

LIGHT COLOUR LUMEN | CRI CODE  
3000K 480 | >80 4



8.0

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | phase-cut dim  
aluminium powder coated

5.60kg IP65 0.3m 6

CODE  
721374D

LIGHT COLOUR LUMEN | CRI CODE  
3000K 480 | >80 4



EDGE  
OUTDOOR  
FLOOR SURFACE





# LINUS

OUTDOOR  
FLOOR SURFACE

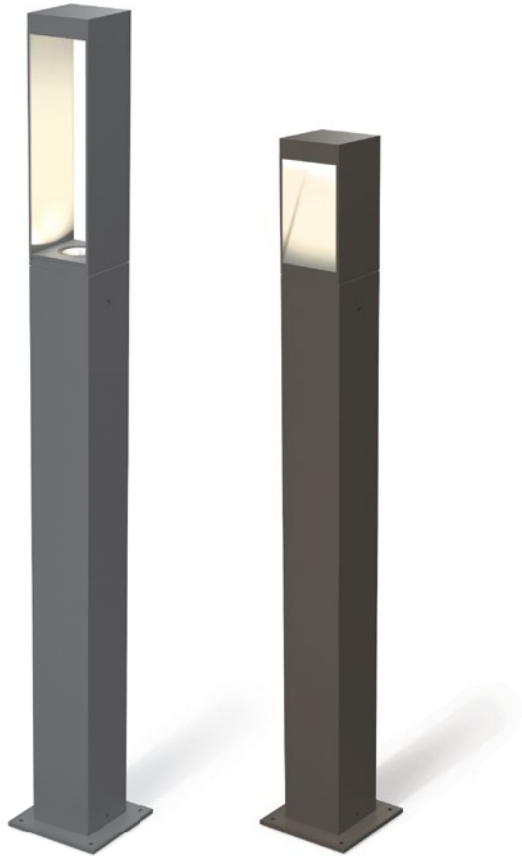


## 1.0

LED 7W | 220-240VAC | 50-60Hz  
COB 3-step | aluminium  
powder coated

0.95kg IP65 0.3

|  | CODE    |
|--|---------|
|  | 726173D |
|  | 726173Y |
|  | 726173A |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 320   | >80 | 4    |




## 2.0

LED 7W | 220-240VAC | 50-60Hz  
COB 3-step | aluminium  
powder coated

0.99kg IP65 0.3

|  | CODE    |
|--|---------|
|  | 726273D |
|  | 726273Y |
|  | 726273A |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 300   | >80 | 4    |



## 3.0

LED 7W | 220-240VAC | 50-60Hz  
COB 3-step | aluminium  
powder coated

0.52kg IP65 0.3

|  | CODE    |
|--|---------|
|  | 726373D |
|  | 726373Y |
|  | 726373A |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 300   | >80 | 4    |

### ALWAYS USE

| base 150 | CODE     |
|----------|----------|
|          | 910024D0 |
|          | 910024Y0 |
|          | 910024A0 |

| base 350 | CODE     |
|----------|----------|
|          | 910026D0 |
|          | 910026Y0 |
|          | 910026A0 |

| base 550 | CODE     |
|----------|----------|
|          | 910028D0 |
|          | 910028Y0 |
|          | 910028A0 |

### OPTIONAL



|                 | CODE     |
|-----------------|----------|
| ground spike    | 90013103 |
| ground fixation | 90013302 |





# PALLUZ C

OUTDOOR  
FLOOR SURFACE



## 1.0

LED 8W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

1.30kg IP65 0.3° 6

opal glass

| CODE |          |
|------|----------|
|      | 724374D_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 720   | >80 | 4    |

## ALWAYS USE

| CODE               |          |
|--------------------|----------|
| base 230           | 910033D0 |
| base 600           | 910036D0 |
| base 800           | 910038D0 |
| invisible fixation |          |
| base 230           | 910032D0 |

## OPTIONAL

| CODE                       |          |
|----------------------------|----------|
| ground spike for invisible |          |
| base 230                   | 90013104 |
| ground fixation for base   |          |
| 230   600   800            | 90013303 |

## 2.0

LED 8W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

1.30kg IP65 0.3° 6

clear glass

| CODE |          |
|------|----------|
|      | 724474D_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|--------------|-------|-----|------|
| 3000K        | 665   | >80 | 4    |

## ALWAYS USE

| CODE               |          |
|--------------------|----------|
| base 230           | 910033D0 |
| base 600           | 910036D0 |
| base 800           | 910038D0 |
| invisible fixation |          |
| base 230           | 910032D0 |


## OPTIONAL

| CODE                       |          |
|----------------------------|----------|
| ground spike for invisible |          |
| base 230                   | 90013104 |
| ground fixation for base   |          |
| 230   600   800            | 90013303 |

TECH  
NICAL



WELL, WELL ... LOOK WHAT THE CAT DRAGGED IN.




CRI 70+

AREA OF APPLICATION

Offices and shops  
for average use

ANWENDUNGSBEREICH

*Büro- und Geschäftsräume mit  
durchschnittlichen Anwendungen*



CRI 80+

AREA OF APPLICATION

Private homes, offices,  
and sales areas

ANWENDUNGSBEREICH

*Privaträume, Büros  
und Verkaufsbereiche*




CRI 90+

AREA OF APPLICATION


Museums, galleries, exquisite dining,  
and exclusive products in stores

ANWENDUNGSBEREICH


*Museen, Gallerien, exquisites Essen und  
Qualitätsprodukte in Shops*

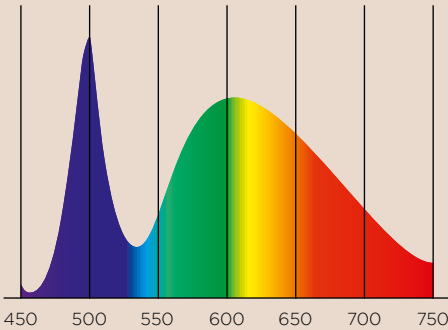

Wavelength (nm) / Wellenlänge (nm)

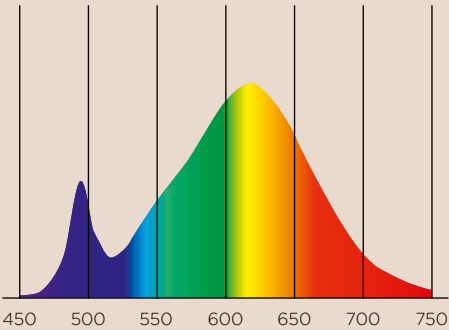

Wavelength (nm) / Wellenlänge (nm)

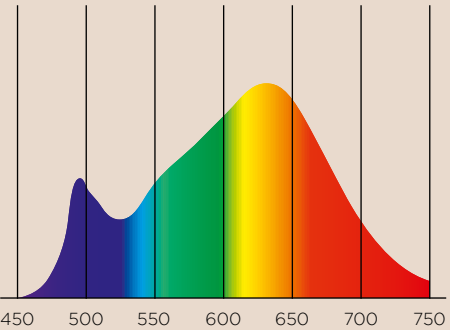

Wavelength (nm) / Wellenlänge (nm)

Why do our LEDs put things in the best light? Because they have a colour rendering index above 80. You're probably thinking "Okay...". But what exactly does that mean? The colour rendering index, the CRI, shows the quality of how colours are perceived under artificial light. The higher this value, and 100 CRI would be possible in theory, the more natural and appealing objects look in your home. So your bright red sofa will finally get the attention it deserves!

Warum unsere LEDs die Dinge ins rechte Licht rücken? Weil sie einen Farbwiedergabewert von mindestens >80 haben. Aha, werden Sie sich jetzt denken. Aber was genau bedeutet das? Nun, der Farbwiedergabewert – oder CRI Index – zeigt an, in welcher Qualität Farben von einer künstlichen Lichtquelle wiedergegeben werden. Je höher also dieser Wert ist – theoretisch wären 100 CRI möglich - desto natürlicher und schöner sehen die Objekte in Ihrem Zuhause aus. So bekommt Ihr knallrotes Sofa endlich die Aufmerksamkeit, die es verdient!

TURN THE LIGHTS DOWN LOW

# DIMMING

## OH, HOW ROMANTIC


What sets a romantic mood faster than tea lights? Correct. Our four dimming variants that easily control the light intensity. Not just with analogue dimming, but digitally or via local building automation. DALI lets you group different luminaires together. You can dim them separately and even set lighting moods in advance. You're renovating and don't want to change the wiring? Then adjusting the light level via PHASE-CUT DIM is perfect. All you need is standard wiring with a three-pin cable. Want an even more precise result? Connect a converter between 1-10 volts to adjust the current. Complex five-pin cabling is not needed here. ZigBee offers another simple option to directly control the lights wirelessly for those who want to dim their lights from their mobile device. It can even be set up as an upgrade of a non-dimmable luminaire. Replace the light engine, and you're done.

## OH, WIE ROMANTISCH

Was sorgt schneller für romantische Stimmung als eine Packung Teelichter? Richtig. Unsere drei Dimming-Varianten mit denen sich die Lichtintensität ganz einfach steuern lässt. Und das nicht nur analog, sondern auch digital oder über die lokale Gebäudeautomatisierung. So kann man mit DALI verschiedene Leuchten gruppieren, separat dimmen und sogar Lichtstimmungen vorab einstellen. Ganz easy vom iPad oder iPhone aus. Sie sind gerade in der Renovierungsphase und möchten die Verkabelung nicht ändern? Dann ist der analoge Phasenabschnittsdimmer PHASE-CUT DIM die perfekte Lösung für Sie. Alles, was Sie dafür brachen ist eine normale Verkabelung mit einem 3-poligen Kabel. Sie möchten ein noch präziseres Ergebnis? Dann können Sie bei 1-10 Volt einen Konverter dazwischenschalten, mit dem die Stromstärke angepasst wird. Wichtig dabei: Zwei weitere Kabel besorgen und die richtige Polarität im Auge behalten.


### PHASE-CUT DIM

*Triac (Analog)*




### 1-10V DIM

*Analog*




### DIM DALI


*Digital*



### ZIGBEE

*Digital*



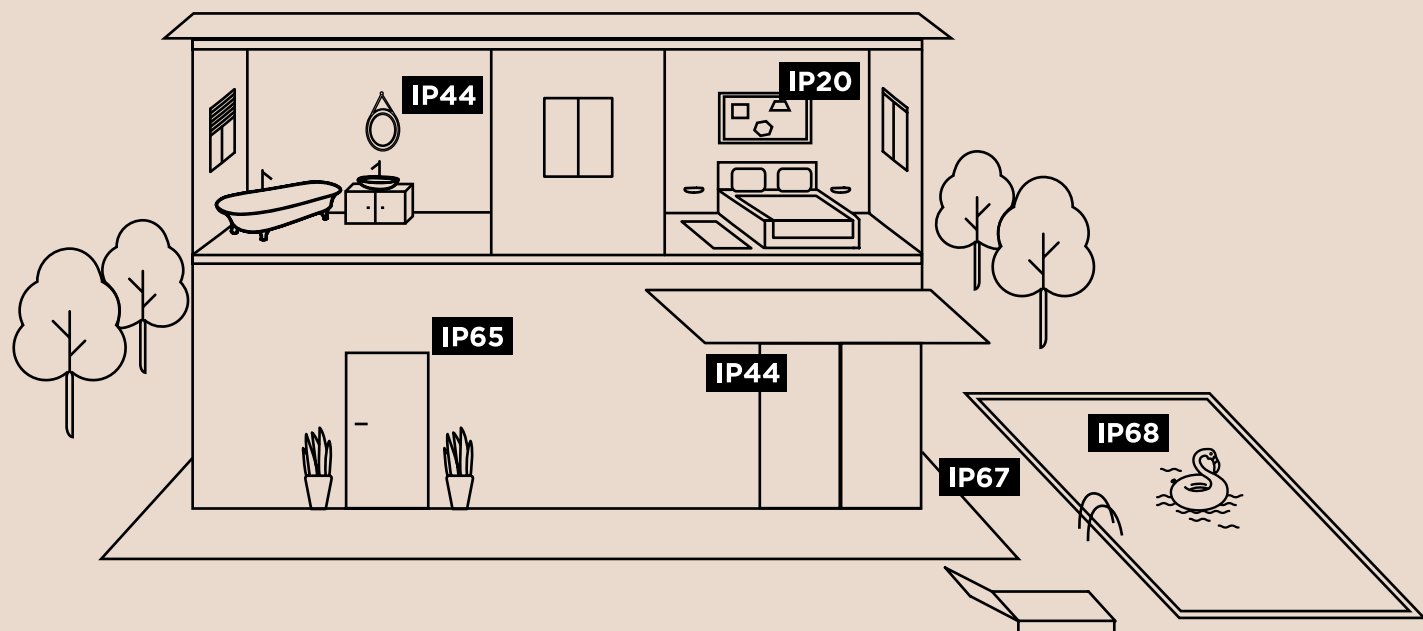

## GENERAL REMARK

We advise to have the lighting devices installed only by a qualified electrician. In case the area is cleaned with water jets, then a minimum of IP65 is required.

## ALLGEMEINER HINWEIS

Wir empfehlen, die Leuchtkörper nur von einem Elektrofachmann installieren zu lassen. Bei Wasserstrahlreinigung der Umgebung mindestens Wasserschutzklasse IP65 wählen.

SAFETY FIRST

# IP RATING

## FIRST DIGIT

Protection against dust

*Schutz gegen Festkörper*




No protection  
*Kein Schutz*



Protected against solid  
objects greater than 50 mm Ø  
*Geschützt vor festen  
Gegenständen über 50 mm Ø*



Protected against solid  
objects greater 12 mm Ø  
*Geschützt vor festen  
Gegenständen über 12 mm Ø*



Protected against solid  
objects over 2.5mm Ø  
*Geschützt vor festen  
Gegenständen über 2,5mm Ø*



Protected against solid  
objects greater than 1.0 mm Ø  
*Geschützt vor festen  
Gegenständen über 1,0 mm Ø*



Dust protected  
*Staubgeschützt*



Dust tight  
*Staubdicht*


## SECOND DIGIT

Protection against water

*Schutz gegen Flüssigkeiten*



No protection  
*Kein Wasserschutz*




Protected against vertically  
dripping water  
*Geschützt vor senkrecht  
fallendem Tropfwasser*



Protected against dripping  
water (tilted up to 15°)  
*Geschützt vor schräg fallen-  
dem Tropfwasser (bis 15°)*



Protected against  
spray water  
*Geschützt vor  
Sprühwasser*




Protected against splashing  
water from all directions  
*Geschützt vor Spritzwasser  
aus allen Richtungen*



Protected against  
water jets  
*Geschützt vor  
Strahlwasser*



Protected against  
strong water jets  
*Geschützt vor starkem  
Strahlwasser*



Protected against  
penetrating water during  
short-term immersion  
*Geschützt vor eindringendem  
Wasser beim kurzzeitigen  
Eintauchen*



Protected against  
submersion  
*Geschützt vor eindrin-  
gendem Wasser beim  
Untertauchen*



POWER SUPPLIES

ACCESSORIES

250mA 10W DIM

Driver 220-240VAC | 50-60Hz  
10-100% | 10W | preset at 250mA  
16-29V | phase-cut dim  
L/W/H 122x41x23

CE 0.094kg SELV IP20

DEEP BIJOU 1.0

CODE  
90226401

350mA 10W DIM

Driver 220-240VAC | 50-60Hz | 10W  
350mA | 12-28V | phase-cut dim  
L/W/H 102x38x21

CE 0.09kg SELV IP20

DEEP PETIT (1x) | DEEP 7W (1x)  
PLANO PETIT (1x) | PLANO 7W (1x)

CODE  
90223402

350/500/700mA 17.5-20W

Driver 220-240VAC | 50-60Hz  
350/500/700mA output selection  
17.5W | 350mA | 25-50V  
20W | 500mA | 20V-40V  
20W | 700mA | 14V-28.5V  
L/W/H 101.5x51x29.5  
CE 0.09kg SELV IP20

DEEP 7/10W (2x)  
RON 7/10W (2x) | RONY 7/10W (2x)

CODE  
90218601

250mA 15W DIM

Driver 220-240VAC | 50-60Hz  
10-100% | 15W | preset at 250mA  
26-42V | phase-cut dim  
L/W/H 122x41x23

CE 0.096kg SELV IP20

DEEP BIJOU 2.0

CODE  
90226501

350mA 10W 1-10V DIM

Driver 220-240VAC | 50-60Hz | 10W  
350mA | 14-28V | 1-10V dim  
L/W/H 101.5x51x29.5

CE 0.09kg SELV IP20

DEEP 7W | RON 7W | RONY 7W  
STRANGE ceiling 7W

CODE  
90223401

350mA 30W

Driver 220-240VAC | 50-60Hz  
30W | 350mA | 43-86V  
L/W/H 127x43x30

CE 0.15kg SELV IP20

DEEP PETIT (3x) | PLANO  
PETIT (3x) | PLANO PETIT 3.0 |  
STRANGE PETIT (3x) | STRANGE  
PETIT 3.0

CODE  
90213701

350mA 4W

Driver 100-240VAC | 50-60Hz  
4W | 350mA | 4-12V  
L/W/H 43x42x23

CE 0.05kg TÜV IP20

DEEP BIJOU 2.0

CODE  
90213201

350mA 15W DIM

Driver 220-240VAC | 50-60Hz | 15W  
350mA | 21-42V | phase-cut dim  
L/W/H 101.5x51x29.5

CE 0.09kg SELV IP20

DEEP PETIT (2x) | DEEP 7W (1x)  
PLANO PETIT (2x) | PLANO 7W (1x)  
LED MODULES HO (1x) | 73240577 |  
73240682 | 73240542 | 73240681

CODE  
90223503

350mA 10W DALI

Driver 220-240VAC | 50-60Hz | 5-100%  
10W | 350mA | 2.5-26V | DALI  
L/W/H 124x31x21

CE 0.08kg EL EMC SELV IP20

DEEP PETIT (1-2x)  
PLANO PETIT (1-2x)

CODE  
90243401

350mA 6W

Driver 90-264VAC | 50-60Hz  
6W | 350mA | 3-22V  
L/W/H 64x35x21

CE 0.04kg IP20

LITO 2W | STRIPE 1W  
SMILE IN 4W

CODE  
90213202

350mA 15W DIM

Driver 220-240VAC | 50Hz | 15W  
350mA | 28-42V | phase-cut dim  
L/W/H 101.5x51x29.5

CE 0.11kg SELV IP20

DEEP 10W | RON 10W | RONY 10W  
LUNA 10W | STRANGE ceiling 10W  
PLANO 10W

CODE  
90228501

350mA 20W DALI

Driver 220-240VAC | 50-60Hz | 1-100%  
20W | preset at 350mA | 10-49V | touch  
dim | DALI  
L/W/H 111x52x22  
CE 0.10kg SELV IP20

DEEP PETIT (1-2x)  
PLANO PETIT (1-2x)

CODE  
90243601

500mA 10W

Driver 220-240VAC | 50Hz  
10W | 500mA | 11-20V  
L/W/H 101.5x51x29.2

CE 0.116kg SELV IP20

DEEP 10W | RON 10W | RONY 10W  
LUNA 10W | STRANGE ceiling 10W  
PLANO 10W

CODE  
90214405

500mA 15W DIM

Driver 220-240VAC | 50-60Hz | 5-100%  
15W | 500mA | 13.5-30V  
L/W/H 102x51x30 | phase-cut dim

CE 0.08kg SELV IP20

DEEP 10W | RON 10W | RONY 10W  
STRANGE ceiling 10W

CODE  
90224501

500mA 7W DIM

Driver 220-240VAC | 50-60Hz  
10-100% | 7W | preset at 500mA  
7-13V | phase-cut dim  
L/W/H 122x41x23

CE 0.07kg SELV IP20

PIRRO 1.0

CODE  
90224301

500mA 20W DIM

Driver 220-240VAC | 50-60Hz  
10-100% | 20W | preset at 500mA  
26-38V | phase-cut dim  
L/W/H 122x41x23

CE 0.0125kg SELV IP20

PIRRO 4.0, 6.0

CODE  
90224602

500mA 10W 1-10V DIM

Driver 220-240VAC | 50-60Hz  
10W | 500mA | 10-20V | 1-10V dim  
L/W/H 100x43x22.5

CE 0.06kg IP20

DEEP 10W | RON 10W | RONY 10W  
LUNA 10W | STRANGE ceiling 10W  
PLANO 10W

CODE  
90234401

500mA 21W DIM

Driver 220-240VAC | 50-60Hz  
21W | 500mA | 16-42V  
L/W/H 110x52x22 | phase-cut dim

CE 0.11kg SELV IP20

DEEP 10W (2x) | RON 10W (2x)  
RONY 10W (2x)

CODE  
90224702

500mA 6W

Driver 90-264VAC | 50-60Hz  
6W | 500mA | 3-12V  
L/W/H 64x35x21

CE 0.04kg EMC IP20

THEMIS 5W | STRANGE wall 5W  
LITO 3W | SMILE IN 6W

CODE  
90214201

500mA 15W DIM

Driver 220-240VAC | 50-60Hz  
10-100% | 15W | preset at 500mA  
12-20V | phase-cut dim  
L/W/H 122x41x23

CE 0.08kg SELV IP20

PIRRO 2.0

CODE  
90224503

500mA 21W DIM

Driver 220-240VAC | 50-60Hz | 5-100%  
21W | 500mA | 28-42V | phase-cut dim  
L/W/H 101.5x51x29.5

CE 0.09kg SELV IP20

DEEP 10W (2x) | RON 10W (2x)  
RONY 10W (2x)

CODE  
90224701

POWER SUPPLIES

ACCESSORIES

|  |  |  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |



POWER SUPPLIES

ACCESSORIES


| TRANSFORMER 12V/105W                                                                       |  |  |  | TRANSFORMER 12V/70W                                                                       |  |  |  |
|--------------------------------------------------------------------------------------------|--|--|--|-------------------------------------------------------------------------------------------|--|--|--|
| 230-240VAC   50-60Hz   35-105VA<br>105W   12V   leading + trailing edge<br>L/W/H 108x52x33 |  |  |  | 230-240VAC   50-60Hz   20-70VA<br>70W   12V   leading + trailing edge<br>L/W/H 108x52x33  |  |  |  |
| CE 0.12kg □ ◻ ◻ IP20                                                                       |  |  |  | CE 0.12kg □ ◻ ◻ IP20                                                                      |  |  |  |
| CODE<br>90221905                                                                           |  |  |  | CODE<br>90221904                                                                          |  |  |  |
| LED DRIVER 12V/10W                                                                         |  |  |  | LED DRIVER 12V/25W                                                                        |  |  |  |
| 220-240VAC   50-60Hz   3-10VA<br>10W   12V   leading + trailing edge<br>L/W/H 102x51x30    |  |  |  | 220-240VAC   50-60Hz   8-25VA<br>25W   12V   leading + trailing edge<br>L/W/H 145x51x29.5 |  |  |  |
| CE 0.1kg □ ◻ ◻ IP20                                                                        |  |  |  | CE 0.1kg □ ◻ ◻ IP20                                                                       |  |  |  |
| CODE<br>90221401                                                                           |  |  |  | CODE<br>90221701                                                                          |  |  |  |
| DIMMER FOR SWITCH                                                                          |  |  |  | DALI SELV DEVICE                                                                          |  |  |  |
| DIM leading /trailing edge<br>230V   max. 200W LED<br>L/W/H 48x17.5x46                     |  |  |  | for 48V system   max. 300W<br>48VDC   L/W/H 213x37x25                                     |  |  |  |
| CE IP30                                                                                    |  |  |  | CE 0.036kg □ ◻ ◻ IP20                                                                     |  |  |  |
| CODE<br>90019017                                                                           |  |  |  | CODE<br>90019193                                                                          |  |  |  |
| DIMMER DIN RAIL                                                                            |  |  |  | DALI DIMMER FOR SWITCH                                                                    |  |  |  |
| DIM leading /trailing edge<br>230V   max. 200W LED<br>L/W/H 17x55x90                       |  |  |  | 230V   50-60Hz<br>L/W/H 48x49x22                                                          |  |  |  |
| CE IP30                                                                                    |  |  |  | CE 0.036kg □ ◻ ◻ IP20                                                                     |  |  |  |
| CODE<br>90019018                                                                           |  |  |  | CODE<br>90019194                                                                          |  |  |  |
| CONNECTION BOX 3P                                                                          |  |  |  | CONNECTION BOX 5P                                                                         |  |  |  |
| incl. strain relief   3 pole push connector<br>L/W/H 75x35x25                              |  |  |  | incl. strain relief   5 pole push connector<br>L/W/H 70x60x30                             |  |  |  |
| CODE<br>90059119                                                                           |  |  |  | CODE<br>90059120                                                                          |  |  |  |
| 350mA 3W IP66                                                                              |  |  |  | 350mA 7W IP67                                                                             |  |  |  |
| Driver 90-264VAC   50-60Hz<br>3W   350mA   3-15V<br>L/W/H 52x30x23                         |  |  |  | Driver 90-295VAC   47-63Hz<br>7W   350mA   10-20V<br>L/W/H 57x41x24                       |  |  |  |
| CE 0.05kg □ ◻ ◻ EMC IP66                                                                   |  |  |  | CE 0.05kg □ ◻ ◻ SELV IP67                                                                 |  |  |  |
| ORIS 0.7 1W   ORIS 1.3 2W   ORIS 2.0 2W   CARD                                             |  |  |  | SMILE IN 4W                                                                               |  |  |  |
| CODE<br>90213101                                                                           |  |  |  | CODE<br>90213301                                                                          |  |  |  |
| 700mA 3W IP66                                                                              |  |  |  | 700mA 7W IP67                                                                             |  |  |  |
| Driver 90-264VAC   50-60Hz<br>3W   700mA   3-6V<br>L/W/H 52x30x23                          |  |  |  | Driver 90-295VAC   47-63Hz<br>7W   700mA   3-10.5V<br>L/W/H 57x41x24                      |  |  |  |
| CE 0.09kg □ ◻ ◻ EMC IP66                                                                   |  |  |  | CE 0.07kg □ ◻ ◻ IP67                                                                      |  |  |  |
| ORIS 0.7 2W                                                                                |  |  |  | ORIS 1.3 4W<br>ORIS 2.0 4W                                                                |  |  |  |
| CODE<br>90215101                                                                           |  |  |  | CODE<br>90215301                                                                          |  |  |  |
| 500mA 7W IP67                                                                              |  |  |  | 500mA 12W IP67                                                                            |  |  |  |
| Driver 90-295VAC   47-63Hz<br>7W   500mA   5-14.5V<br>L/W/H 57x41x24                       |  |  |  | Driver 120-240VAC   50-60Hz<br>12W   500mA   2-26V<br>L/W/H 81x40x23                      |  |  |  |
| CE 0.15kg □ ◻ ◻ SELV IP67                                                                  |  |  |  | CE 0.15kg □ ◻ ◻ SELV IP67                                                                 |  |  |  |
| SMILE IN 6W                                                                                |  |  |  | SMILE IN 6W                                                                               |  |  |  |
| CODE<br>90214301                                                                           |  |  |  | CODE<br>90214402                                                                          |  |  |  |
| 700mA 12W IP67                                                                             |  |  |  | 700mA 18W IP67 DIM                                                                        |  |  |  |
| Driver 120-240VAC   50-60Hz<br>12W   700mA   2-18V<br>L/W/H 81x40x23                       |  |  |  | Driver 220-240VAC   50-60Hz<br>18W   700mA   4-26V   dim trailing edge<br>L/W/H 133x40x30 |  |  |  |
| CE 0.28kg □ ◻ ◻ SELV IP67                                                                  |  |  |  | CE 0.28kg □ ◻ ◻ SELV IP67                                                                 |  |  |  |
| CODE<br>90215402                                                                           |  |  |  | CODE<br>90225602                                                                          |  |  |  |

LED LAMPS

ACCESSORIES

**PAR16 FLAT HEAD**  
PAR16 | GU10 | 220-240VAC  
50-60Hz


CE 0.06kg IP20 36°



| CODE     |
|----------|
| 90059125 |

**ZIGBEE LED 2700K**  
220-240VAC | 50-60Hz | phase-cut dim  
>80 CRI | LED 10W | 2700K | 720lm

36°



| CODE     |
|----------|
| 901268W2 |
| 901268B2 |

**LED AC MODULE 2700K**  
220-240V | COB 3-step | phase-cut  
dim | >90 CRI | 8W | 2700K | 480lm  
compatibility on request

CE 0.08kg IP20 36°



| CODE     |
|----------|
| 901268W3 |
| 901268B3 |

**LED AC MODULE 3000K**  
220-240V | COB 3-step | phase-cut  
dim | >90 CRI | 8W | 3000K | 500lm  
compatibility on request

CE 0.08kg IP20 36°



| CODE     |
|----------|
| 901268W5 |
| 901268B5 |

**LED MODULE HO 2700K**  
LED Module | 350mA | 35Vf  
2700K | 12W | >90 CRI | 1050lm  
compatibility on request

CE 0.06kg IP20 26°



| CODE     |
|----------|
| 73240577 |
| 73240682 |



**LED MODULE HO 3000K**  
LED Module | 350mA | 35Vf  
3000K | 12W | >90 CRI | 1100lm  
compatibility on request

CE 0.06kg IP20 26°



| CODE     |
|----------|
| 73240542 |
| 73240681 |



**PAR16 LED 2700K**  
PAR16 LED | GU10 | 175-250VAC  
50-60Hz | 2700K | 7W | >90 CRI  
360lm | phase-cut dim

CE 0.06kg IP20 45°



| CODE     |
|----------|
| 901228B3 |



**PAR16 LED 2700K**  
PAR16 LED | GU10 | 220-240VAC  
50-60Hz | 2700K | 4.3W | >80 CRI  
350lm

CE 0.06kg IP20 36°



| CODE     |
|----------|
| 905227S2 |



**PAR16 LED AMBIENT**  
PAR16 LED | GU10 | 220-240VAC  
50-60Hz | 1800-2850K | 7W | >90 CRI  
380lm | ambient white phase-cut dim

CE 0.06kg IP20 40°



| CODE     |
|----------|
| 901229S9 |



**PAR16 LED 3000K**  
PAR16 LED | GU10 | 175-250VAC  
50-60Hz | 3000K | 7W | >80 CRI  
465lm | phase-cut dim

CE 0.06kg IP20 45°



| CODE     |
|----------|
| 901228W4 |



**METAL SPRING CLIP**  
Alternative front lamp fixation spring  
for ø 50 lamp rings  
MR16 | LED | PAR16 | max. 12W  
**DEEP ADJUST | DEEP ASYM**  
**DEEP 2.0 | PYRAMID | PLANO**  
**STRANGE** ceiling | **SPINEO | NOP**  
**SOLID**




| CODE     |
|----------|
| 73240203 |

**SPRING CLIP**  
lamp fixation | push-in system for ø 50  
lamp rings  
MR16 | LED | PAR16 | max. 12W  
**DEEP ADJUST | DEEP ASYM**  
**DEEP 2.0 | PYRAMID | PLANO**  
**STRANGE** ceiling | **SPINEO | NOP**  
**SOLID**

| CODE     |
|----------|
| 73240651 |
| 73240941 |
| 73240940 |
| 73240942 |
| 73240652 |




**QT14 LED 2700K**  
QT14 LED | G9 | 220-240VAC  
50-60Hz | 2700K | 3W | >80 CRI | 200lm  
**DRO**  
CE 0.02kg IP20



**QT14 LED 2700K OPAL**  
QT14 LED | G9 | 220-240VAC | 50-60Hz  
2700K | 3W | >80 CRI | 170lm  
phase-cut dim | opal  
CE 0.02kg IP20




**QT14 LED 3000K**  
QT14 LED | G9 | 220-240VAC  
50Hz | 3000K | 3W | >80 CRI | 300lm  
CE 0.03kg IP20




**QT14 LED 3000K OPAL**  
QT14 LED | G9 | 175-250VAC | 50-60Hz  
3000K | 3W | >80 CRI | 190lm  
phase-cut dim | opal  
CE 0.02kg IP20




**QT14 LED 2800K**  
QT14 LED 2800K | 300lm  
phase cut dim  
**DRO**  
CE 0.03kg IP20




**QT14 LED 3000K**  
QT14 LED 3000K | 330lm  
phase cut dim  
**DRO**  
CE 0.03kg IP20




**C35 LED 2700K OPAL**  
C35 LED | E14 | 220-240VAC | 50-60Hz  
2700K | 6W | >90 CRI | 450lm  
phase-cut dim 20-100% | opal  
**REVER** wall  
CE 0.03kg IP20




**A60 LED 2700K OPAL**  
A60 LED | E27 | 220-240VAC  
50-60Hz | 2700K | 9W | >90 CRI  
800lm | phase-cut dim | opal  
**ROCK** | **REVER** table | floor  
**BISHOP**  
CE 0.04kg IP20




**A60 LED 2700K OPAL**  
A60 LED | E27 | 220-240VAC  
50-60Hz | 2700K | 15W | >90 CRI  
1400lm | phase-cut dim | opal  
**ROCK** | **REVER** suspended | **BISHOP**  
CE 0.04kg IP20




**G95 LED 2700K OPAL**  
G95 LED | E27 | 220-240VAC | 50-60Hz  
2700K | 12W | >90 CRI | 1000lm  
phase-cut dim | opal  
**WIRO** 6.1, 6.5 | **ROCK** | **BISHOP**  
CE 0.11kg IP20




**A60 LAMP 2200K**  
A60 DECORATIVE LOW OUTPUT  
CARBON FILAMENT | E27  
220-240VAC | 2200K | 15W | 50lm  
phase-cut dim  
**WIRO** 1.8, 2.0, 3.8, 6.1, 6.5 | **CONE**  
**GLOBE** 1.0, 2.0, 3.0  
CE 0.04kg IP20




**G95 LAMP 2200K**  
G95 DECORATIVE LOW OUTPUT  
CARBON FILAMENT | E27  
220-240VAC | 2200K | 15W | 50lm  
phase-cut dim  
**WIRO** 6.1, 6.5  
CE 0.06kg IP20




**ST64 LAMP 2200K**  
ST64 DECORATIVE LOW OUTPUT  
CARBON FILAMENT | E27  
220-240VAC | 2200K | 15W | 50lm  
phase-cut dim  
**WIRO** 1.8, 3.8, 6.1, 6.5  
CE 0.05kg IP20




**A60 LED 2200K**  
A60 LED FILAMENT | E27  
220-240VAC | 50-60Hz | 2200K | 4.5W  
>90CRI | 315lm | phase-cut dim  
gold tinted glass  
**WIRO** 1.8, 2.0, 3.8, 6.1, 6.5 | **CONE**  
**GLOBE** 1.0, 2.0, 3.0 | **J.J.W.** | **BISHOP**  
CE 0.04kg IP2




**A60 LED 2200K MIRROR**  
A60 LED FILAMENT | E27  
220-240VAC | 50-60Hz | 2200K | 6W  
>95 CRI | 400lm | phase-cut dim  
**MIRRO**  
CE 0.04kg IP20




**A60 LED 2700K MIRROR**  
A60 LED FILAMENT | E27  
220-240VAC | 50-60Hz | 2700K | 6W  
>90 CRI | 500lm | phase-cut dim  
**MIRRO**  
CE 0.04kg IP20




**G95 LED 2200K MIRROR**  
G95 LED FILAMENT | E27  
220-240VAC | 50-60Hz | 2200K | 6W  
>95 CRI | 400lm | phase-cut dim  
**MIRRO**  
CE 0.07kg IP20




**G95 LED 2700K MIRROR**  
G95 LED FILAMENT | E27  
220-240VAC | 50-60Hz | 2700K | 6W  
>90 CRI | 500lm | phase-cut dim  
**MIRRO**  
CE 0.07kg IP20




**A60 LED 2700K DIM**  
A60 LED FILAMENT | E27  
220-240VAC | 50-60Hz | 2700K | 6W  
>85 CRI | 500lm | phase-cut dim  
**WIRO** 1.8, 2.0, 3.8, 6.1, 6.5 | **CONE**  
**GLOBE** 1.0, 2.0, 3.0 | **ROCK** | **J.J.W.**  
**BISHOP**  
CE 0.04kg IP20




**G95 LED 2200K**  
G95 LED FILAMENT | E27  
220-240VAC | 50-60Hz | 2200K | 6W  
>95 CRI | 450lm | phase-cut dim  
gold tinted glass  
**WIRO** 6.1, 6.5 | **ROCK** | **BISHOP**  
CE 0.07kg IP20



**ST64 LED 2200K DIM**  
ST64 LED FILAMENT | E27  
220-240VAC | 50-60Hz | 2200K | 6W  
>95 CRI | 450lm | phase-cut dim  
gold tinted glass  
**WIRO** 1.8, 3.8, 6.1, 6.5 | **BISHOP**  
CE 0.05kg IP20



**G125 LED 2200K**  
G125 LED FILAMENT | E27  
220-240VAC | 50-60Hz | 2200K | 6W  
>95 CRI | 450lm | phase-cut dim  
gold tinted glass  
**WIRO** 6.1, 6.5 | **ROCK** | **BISHOP**  
CE 0.11kg IP20



# DECO LAMPS

## ACCESSORIES

### T32-180 LAMP 2200K

T32-180 DECORATIVE LOW  
OUTPUT CARBON FILAMENT | E27  
220-240VAC | 2200K | 15W | 50lm  
phase-cut dim

**WIRO** 1.8, 3.8, 6.1, 6.5 | **WIRO** wall  
table | floor | **CONE** | **DIAMOND**  
**GLOBE** | **INDUSTRY** | **ROCK**

€ 0.05kg IP20



ø32



210

CODE

9003E106

### T32-300 LAMP 2200K

T32-300 DECORATIVE LOW  
OUTPUT CARBON FILAMENT | E27  
220-240VAC | 2200K | 15W | 50lm  
phase-cut dim | **WIRO** 3.8, 6.1, 6.5

**INDUSTRY DIAMOND** | **GLOBE**  
1.0, 2.0, 5.0, 6.0 | **GLOBE** floor 1.0, 2.0  
**GLOBE** table 2.0 | **ROCK**

€ 0.07kg IP20



ø32



295

CODE

9003E127

### T30-300 LED 2200K

T30-300 LED FILAMENT | E27  
220-240VAC | 50-60Hz | 2200K | 8W  
>95 CRI | 550lm | phase-cut dim  
gold tinted glass

**WIRO** 3.8, 6.1, 6.5 | **DIAMOND**  
**INDUSTRY** | **GLOBE** 1.0, 2.0, 5.0, 6.0  
table 2.0 | floor 1.0, 2.0 | **ROCK**

€ 0.08kg IP20



ø30



300

CODE

9003E130

### T30-300 LED 2700K


T30-300 LED FILAMENT | E27  
220-240VAC | 50-60Hz | 2700K | 8W  
>90 CRI | 550lm | phase-cut dim

**WIRO** 3.8, 6.1, 6.5 | **DIAMOND**  
**INDUSTRY** | **GLOBE** 1.0, 2.0, 5.0, 6.0  
table 2.0 | floor 1.0, 2.0 | **ROCK**

€ 0.08kg IP20



ø30



300

CODE

9003E135

### T30-225 LED 2200K

T30-225 LED FILAMENT | E27  
220-240VAC | 50-60Hz | 2200K | 6W  
>95 CRI | 450lm | phase-cut dim  
gold tinted glass

**WIRO** 3.8, 6.1, 6.5 | wall | table | floor  
**CONE** | **DIAMOND** | **INDUSTRY**  
**GLOBE** 1.0, 2.0, 4.0, 5.0, 6.0 | **ROCK**

€ 0.06kg IP20



ø30



225

CODE

9003E129

### T30-225 LED 2700K

T30-225 LED FILAMENT | E27  
220-240VAC | 50-60Hz | 2700K | 6W  
>90 CRI | 500lm | phase-cut dim  
gold tinted glass

**WIRO** 1.8, 3.8, 6.1, 6.5 | wall | table | floor  
**CONE** | **DIAMOND** | **INDUSTRY**  
**GLOBE** 1.0, 2.0, 4.0, 5.0, 6.0 | **ROCK**

€ 0.06kg IP20



ø30



225

CODE


9003E136

# PLASTERKITS

## ACCESSORIES

### PLANO 1.0

plasterkit




CODE

90017104

### PLANO 2.0

plasterkit




CODE

90017105

### LUNA 1.0 ROUND

plasterkit


not compatible with LUNA ROUND  
IP44 1.0 LED HV



### LUNA 1.0 SQUARE


plasterkit

not compatible with LUNA SQUARE  
IP44 1.0 LED HV



### LITO

plasterkit




CODE

90017119

### THEMIS 1.7

plasterkit




CODE

90017101

### THEMIS 2.7

plasterkit




CODE

90017102

### THEMIS 5.0

plasterkit



CODE

90017115




PLASTERKITS

ACCESSORIES


STRANGE 1.0 | SNEAK  
TRIMLESS 1.0  
aluminium plasterkit

86x86 8-32



STRANGE 1.0 | SNEAK  
TRIMLESS 1.0  
plastic plasterkit

86x86 10 or 13



CODE

90017120


CODE

90017122

90017116


DEEP ADJUST TRIMLESS  
plasterkit

105-110 12.5, 15, 20, 25




STRANGE PETIT 1.0  
aluminium plasterkit

64x64 7-17




STRANGE PETIT 1.0  
plastic plasterkit

68x68 10 or 13




STRANGE 2.0 | SNEAK  
TRIMLESS 2.0  
aluminium plasterkit

156x86 8-32




STRANGE 2.0 | SNEAK  
TRIMLESS 2.0  
plastic plasterkit

156x86 10 or 13




ORIS 0.7  
recessed housing incl. plasterkit

191x58 60




STRANGE PETIT 2.0  
aluminium plasterkit

64x117 7-17




STRANGE PETIT 2.0  
plastic plasterkit

68x119 10 or 13




STRANGE PETIT 3.0  
aluminium plasterkit

64x169 7-17




STRANGE PETIT 3.0  
plastic plasterkit

68x171 10 or 13




ORIS 1.3  
recessed housing incl. plasterkit

122x122 60




ORIS 2.0  
recessed housing incl. plasterkit

123x191 60




STRIPE 0.4 | 0.7  
recessed housing incl. plasterkit

75x75 55



STRIPE 2.2  
recessed housing incl. plasterkit


251x76 55



RECESSED HOUSING


ACCESSORIES

**LITO**  
recessed housing  
always use in combination with  
plasterkit




CODE  
90012027

**THEMIS 1.7**  
recessed housing  
always use in combination with  
plasterkit




CODE  
90012032

**THEMIS 2.7**  
recessed housing  
always use in combination with  
plasterkit




CODE  
90012033

**THEMIS 5.0**  
recessed housing  
always use in combination with  
plasterkit




CODE  
90012036

**SMILE IN**  
recessed ring





CODE  
90012030

**MAP 0.6 | CHART 0.6**  
ground housing





CODE  
90012201

**ORIS 0.7**  
concrete housing





CODE  
90012044

**ORIS 1.3**  
concrete housing




CODE  
90012040

**ORIS 2.0**  
concrete housing




CODE  
90012042

**MAP 1.2 | CHART 1.2**  
**MAP ASYM 1.2 | CHART**  
**ASYM 1.2**  
ground housing



CODE  
90012203

**MAP 1.6 | CHART 1.6**  
**MAP ASYM 1.6 | CHART**  
**ASYM 1.6**  
ground housing



CODE  
90012204




for more support and planning of 1-phase track systems,  
please check our FAQ section on [weverducre.com/faq](https://weverducre.com/faq)

# 1-PHASE TRACK

## ACCESSORIES

**COVERPLATE I/L/T/X**  
only use with recessed tracks




**COVERPLATE END FEEDS**  
only use with recessed tracks



**TRACK ADAPTER**  
no space for driver  
for suspended luminaires without  
steel wire | incl. strain relief  
max. weight 10kg




**T-CONNECTOR**  
can be used as feed




|  |          |
|--|----------|
|  | CODE     |
|  | 90014010 |
|  | 90014011 |

**T-CONNECTOR**  
can be used as feed




|  |          |
|--|----------|
|  | CODE     |
|  | 90014012 |
|  | 90014013 |

**T-CONNECTOR**  
can be used as feed



|  |          |
|--|----------|
|  | CODE     |
|  | 90014014 |
|  | 90014015 |

**T-CONNECTOR**  
can be used as feed



|  |          |
|--|----------|
|  | CODE     |
|  | 90014016 |
|  | 90014017 |

for more support and planning of 3-phase track systems,  
please check our FAQ section on [weverducre.com/faq](https://weverducre.com/faq)

# 3-PHASE TRACK

## ACCESSORIES

**CUTTING TOOL**  
for 3-phase track and 48V track  
CE TÜV SELV




|  |          |
|--|----------|
|  | CODE     |
|  | 90014165 |

**TRACK ADAPTER**  
no space for driver  
for suspended luminaires without  
steel wire | incl. strain relief  
max. weight 5kg




|  |          |
|--|----------|
|  | CODE     |
|  | 90014078 |
|  | 90014079 |

**T-CONNECTOR**  
can be used as feed




|  |          |
|--|----------|
|  | CODE     |
|  | 90014228 |
|  | 90014229 |

**T-CONNECTOR**  
can be used as feed




|  |          |
|--|----------|
|  | CODE     |
|  | 90014230 |
|  | 90014231 |

**T-CONNECTOR**  
can be used as feed



|  |          |
|--|----------|
|  | CODE     |
|  | 90014232 |
|  | 90014233 |

**T-CONNECTOR**  
can be used as feed




|  |          |
|--|----------|
|  | CODE     |
|  | 90014234 |
|  | 90014235 |

SUSPENSION OPTIONS

ACCESSORIES

STRAIN RELIEF

for multi base | without steel wire  
REVER | ROCK | CONE




CODE

90052023

WIRO

single decenter set without ceiling  
base | E27 | 2.6m




CODE

90015160

WIRO

single decenter set without ceiling  
base | E27 | 6.0m



CODE

90015161

WIRO

6.0m suspension

Decenter 1.0

CODE

90052051

Decenter 2.0


90052056

Decenter 3.0

90052063

STRAIN RELIEF

accessory for WIRO suspension




CODE

90052064

WIRO

cable wall bracket  
only for WIRO textile cable




CODE

90052062

WIRO

ceiling hook




CODE

90052061

ROOMOR CEILING 1.0 | 2.0

extension tube | 0.5m | use only 1 per  
luminaire



CODE

90019192

ROOMOR E27

6.0m suspension  
including single surface ceiling base

| CODE                                                                               |             |
|------------------------------------------------------------------------------------|-------------|
|  | 2482E0B _ _ |
|  | 2482E0R _ _ |
|  | 2482E0G _ _ |

ROOMOR PAR16

6.0m suspension  
including single surface ceiling base

| CODE                                                                                |             |
|-------------------------------------------------------------------------------------|-------------|
|  | 248220B _ _ |
|  | 248220R _ _ |
|  | 248220G _ _ |

BISHOP SUSPENSION 6.0M

only for BISHOP 4.0 and 6.0

white susp. set - white ceiling base  
grey susp. set - grey ceiling base  
red susp. set - white ceiling base  
black susp. set - black ceiling base

| CODE                                                                                |          |
|-------------------------------------------------------------------------------------|----------|
|  | 90015128 |
|  | 90015140 |
|  | 90015136 |
|  | 90015127 |

BISHOP SUSPENSION 6.0M

only for BISHOP 8.0

white susp. set - white ceiling base  
grey susp. set - grey ceiling base  
red susp. set - white ceiling base  
black susp. set - black ceiling base

| CODE                                                                                  |          |
|---------------------------------------------------------------------------------------|----------|
|  | 90015131 |
|  | 90015141 |
|  | 90015137 |
|  | 90015130 |

ROOMOR CEILING 1.0 | 2.0

extension tube | 1.0m | use only 1 per  
luminaire




CODE

90019191

SINGLE CEILING BASE

semi recessed | for shades without  
steel wire only




CODE

90052026

90052027

SINGLE SUSPENSION

ceiling base round




CODE

90052022

90052021

INVISIBLE CEILING  
SUSPENSION SYSTEM

plasterkit | system - with fixation  
and adjustment with or without steel  
cable | max. 10kg



CODE

90015195




# SUSPENSION OPTIONS

## ACCESSORIES

HOOK

for multi suspension  
REVER | ROCK



|                                                                                  | CODE     |
|----------------------------------------------------------------------------------|----------|
|  | 90052066 |
|  | 90052065 |

SHIEK 4.0 | 5.0

cable ring for 3 luminaires



|                                                                                   | CODE     |
|-----------------------------------------------------------------------------------|----------|
|  | 90059123 |
|  | 90059121 |

SHIEK 4.0 | 5.0

cable ring for 4 luminaires



|                                                                                   | CODE     |
|-----------------------------------------------------------------------------------|----------|
|  | 90059124 |
|  | 90059122 |

CONNECTOR SET


extra set standard connectors for  
5 to 8 pieces | use when connecting  
more than 4 MULTI fixtures to one  
ceiling base round



|                                                                                     | CODE     |
|-------------------------------------------------------------------------------------|----------|
|  | 90059118 |

CORK MULTI


multiple suspension ceiling base  
round for 3 to 8 luminaires | incl. PS



|                                                                                    | CODE     |
|------------------------------------------------------------------------------------|----------|
|   | 90052015 |
|  | 90052016 |

CORK MULTI


multiple suspension ceiling base  
600mm | 2 luminaires | incl. PS



|                                                                                     | CODE     |
|-------------------------------------------------------------------------------------|----------|
|   | 90052017 |
|  | 90052018 |

CORK MULTI


multiple suspension ceiling base  
900mm | 3 luminaires | incl. PS



|                                                                                     | CODE     |
|-------------------------------------------------------------------------------------|----------|
|   | 90052019 |
|  | 90052020 |

MULTIPLE SUSPENSION  
CEILING BASE ROUND


BOX | DOCUS | HEXO | RAY MULTI  
WETRO | SHIEK | DINOR | SELO  
standard up to 4 luminaires  
add 90059118 for 5 - 8 luminaires



|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|   | 90052005 |
|  | 90052006 |

MULTIPLE SUSPENSION  
CEILING BASE


BOX | DOCUS | HEXO | RAY MULTI  
WETRO | SHIEK | SELO  
600mm | 2 luminaires



|                                                                                    | CODE     |
|------------------------------------------------------------------------------------|----------|
|  | 90052007 |
|  | 90052008 |

MULTIPLE SUSPENSION  
CEILING BASE


BOX | DOCUS | HEXO | RAY MULTI  
WETRO | SHIEK | SELO  
900mm | 3 luminaires



|                                                                                     | CODE     |
|-------------------------------------------------------------------------------------|----------|
|  | 90052009 |
|  | 90052010 |

MULTIPLE SUSPENSION  
CEILING BASE


BOX | DOCUS | HEXO | RAY MULTI  
WETRO | SHIEK | SELO  
1200mm | 4 luminaires



|                                                                                     | CODE     |
|-------------------------------------------------------------------------------------|----------|
|  | 90052011 |
|  | 90052012 |

MULTIPLE SUSPENSION  
CEILING BASE

BOX | DOCUS | HEXO | RAY MULTI  
WETRO | SHIEK | SELO  
1500mm | 5 luminaires



|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 90052013 |
|  | 90052014 |

# ACCESSORIES

## ACCESSORIES

ROOMOR


shade 1.0



|                                                                                     | CODE      |
|-------------------------------------------------------------------------------------|-----------|
|  | 9113610B1 |
|  | 9113610K1 |
|  | 911361RW1 |
|  | 911361GW1 |
|  | 911361FT1 |

ROOMOR


shade 2.0



|                                                                                     | CODE      |
|-------------------------------------------------------------------------------------|-----------|
|  | 9113620B1 |
|  | 9113620K1 |
|  | 911362RW1 |
|  | 911362GW1 |
|  | 911362FT1 |

ROOMOR

shade 3.0



|                                                                                     | CODE      |
|-------------------------------------------------------------------------------------|-----------|
|  | 9113630B1 |
|  | 9113630K1 |
|  | 911363RW1 |
|  | 911363GW1 |
|  | 911363FT1 |

ROOMOR

shade 4.0



|                                                                                     | CODE      |
|-------------------------------------------------------------------------------------|-----------|
|  | 9113640B1 |
|  | 9113640K1 |
|  | 911364RW1 |
|  | 911364GW1 |
|  | 911364FT1 |

ODREY


shade 1.0



|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|   | 911421G1 |
|  | 911421B1 |

ODREY


shade 2.0



|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|   | 911422G1 |
|  | 911422B1 |

ODREY


shade 3.0



|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|   | 911423G1 |
|  | 911423B1 |

ODREY


shade 4.0



|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|   | 911424G1 |
|  | 911424B1 |

ODREY

shade 5.0



|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 911425G1 |
|  | 911425B1 |

ODREY


shade 6.0



|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 911426G1 |
|  | 911426B1 |

ODREY


shade 7.0



|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 911427G1 |
|  | 911427B1 |

ODREY

shade 8.0



|                                                                                       | CODE     |
|---------------------------------------------------------------------------------------|----------|
|  | 911428G1 |
|  | 911428B1 |


WEVER & DUCRÉ 714 — 715

ACCESSORIES

ACCESSORIES

CORK

bottle 1 | clear glass




CODE

90019013

CORK

bottle 2 | clear glass with closing cap



CODE

90019014

HONEYCOMB

CENO | PIRRO  
BLIEK ROUND PETIT




CODE

90051130

90051131

STAKE

snoot




CODE

90019004

GETTON

big cover




CODE

911141W1

911141D1

X-BEAM

snoot




CODE

90019023

BOX | RAY

flaps for adjustable beam angle  
powder coated white




CODE

900401W0

BASE 600

FIFTY FIFTY | SMILE | SWAY | PALOS  
with fixation plate




CODE

910016D0

910016A0

BASE 800

FIFTY FIFTY | SMILE | SWAY | PALOS  
with fixation plate




CODE

910018D0

910018A0

BASE 400

FIFTY FIFTY | SMILE | SWAY | PALOS  
with concrete ground fixation




CODE

910074D0

910074A0

BASE 600

FIFTY FIFTY | SMILE | SWAY | PALOS  
with concrete ground fixation




CODE

910076D0

910076A0

BASE 1000

FIFTY FIFTY | SMILE | SWAY | PALOS  
with fixation plate




CODE

910010D0

910010A0

BASE 800

FIFTY FIFTY | SMILE | SWAY | PALOS  
with concrete ground fixation




CODE

910078D0

910078A0

BASE 300

FIFTY FIFTY | SMILE | SWAY | PALOS  
with concrete ground fixation




CODE

910073D0

910073A0

BASE 1000

FIFTY FIFTY | SMILE | SWAY | PALOS  
with concrete ground fixation



CODE

910070D0


910070A0

BASE

ACCESSORIES

BASE 300

FIFTY FIFTY | SMILE | SWAY | PALOS  
with fixation plate




CODE

910013D0

910013A0

BASE 400

FIFTY FIFTY | SMILE | SWAY | PALOS  
with fixation plate



CODE

910014D0

910014A0





## NOTES



## NOTES

## NOTES



## NOTES

## NOTES



## NOTES

# ICONS

| ICON                                                                               | ENGLISH                       | GERMAN                | FLEMISH                    | FRENCH                     | SPANISH                               | ITALIAN                          | RUSSIAN                    |
|------------------------------------------------------------------------------------|-------------------------------|-----------------------|----------------------------|----------------------------|---------------------------------------|----------------------------------|----------------------------|
|     | Cutout Round                  | Ausschnitt rund       | Ronde inbouwopening        | Découpe ronde              | Corte circular                        | Taglio tondo                     | Вырез круглый              |
|     | Cutout Square                 | Ausschnitt eckig      | Rechthoekige inbouwopening | Découpe rectangulaire      | Corte rectangular                     | Taglio quadro                    | Вырез квадратный           |
|    | Recessed Depth                | Einbautiefe           | Inbouwdiepte               | Profondeur d'encastrement  | Profundidad de empotramiento          | Profondità dell'incasso          | Установочная глубина       |
|     | Low Recessed Depth            | Geringe Einbautiefe   | Lage inbouwdiepte          | Encastré Profondeur faible | Reducida profundidad de empotramiento | Profondità dell'incasso ridotta  | Низкая глубина встраивания |
|     | Thickness                     | Stärke                | Dikte                      | Épaisseur                  | Espesor                               | Spessore                         | Толщина                    |
|    | Turn Vertical                 | Vertikal drehbar      | Verticaal richtbaar        | Orientable vertical        | Orientable en vertical                | Orientabile in verticale         | Наклонный по вертикали     |
|   | Turn Horizontal               | Horizontal drehbar    | Horizontaal richtbaar      | Orientable horizontal      | Orientable en horizontal              | Orientabile in orizzontale       | Поворотный по горизонтали  |
|   | Beam Angle                    | Abstrahlwinkel        | Reflectorhoek              | Faiseau                    | Ángulo de apertura                    | Angolo di apertura (del fascio)  | Угол рассеивания           |
|   | Tilting outside the luminaire | nach außen schwenkbar | Kantel- en richtbaar       | Projecteur extractible     | basculación exterior de la luminaria  | inclinazione esterna apparecchio | Вращение снаружи           |
|   | Class 1 Fixture               | Leuchte der Klasse 1  | Toestel klasse 1           | Appareil classe 1          | Aparato de clase 1                    | Lampada classe 1                 | Класс защиты светильника 1 |
|   | Class 2 Fixture               | Leuchte der Klasse 2  | Toestel klasse 2           | Appareil classe 2          | Aparato de clase 2                    | Lampada classe 2                 | Класс защиты светильника 2 |
|   | Class 3 Fixture               | Leuchte der Klasse 3  | Toestel klasse 3           | Appareil classe 3          | Aparato de clase 3                    | Lampada classe 3                 | Класс защиты светильника 3 |
|  | Safety Distance               | Sicherheitsabstand    | Veiligheidsafstand         | Distance de sécurité       | Distancia de seguridad                | Distanza di sicurezza            | Безопасное расстояние      |
|   | Glowtest 960                  | Glühdrahtprüfung 960  | Gloeidraadtest 960         | Test au fil incandescent   | Prueba de hilo 960                    | Resistenza alla temperatura 960° | Тестирование на нагрев 960 |
|   | IP Rated                      | Schutzklasse          | IP rating                  | Indice de protection       | Grado IP                              | Grado di protezione IP           | Класс защиты IP            |
|   | IK rating                     | Schlagfestigkeit      | IK rating                  | IK rating                  | Grado IK                              | IK rating                        | Код защиты IK              |

# ICONS

| ICON                                                                                  | ENGLISH                        | GERMAN                             | FLEMISH                | FRENCH                                    | SPANISH                             | ITALIAN                             | RUSSIAN                    |
|---------------------------------------------------------------------------------------|--------------------------------|------------------------------------|------------------------|-------------------------------------------|-------------------------------------|-------------------------------------|----------------------------|
|    | Plastic                        | Kunststoff                         | Kunststof              | Plastique                                 | Plástico                            | Plastica                            | пластик                    |
|    | Protection Glass               | Sicherheitsglas                    | Beschermglas           | Verre de protection                       | Vidrio de protección                | Protetto con vetro                  | Защитное стекло            |
|    | Tempered Glass                 | Temperiertes Glas                  | Getemperd beschermglas | Verre de protection température sur verre | Cristal atemperado                  | Vetro temperato                     | Закалённое стекло          |
|    | Fixation Ceiling               | Deckenmontage                      | Plafondbevestiging     | Montage au plafond                        | Montaje en techo                    | Montaggio a soffitto                | Потолочное крепление       |
|   | Fixation Wall                  | Wandmontage                        | Wandbevestiging        | Montage au mur                            | Montaje en pared                    | Montaggio a parete                  | Настенное крепление        |
|  | Fixation Floor                 | Bodenmontage                       | Vloerbevestiging       | Montage au sol                            | Montaje en suelo                    | Montaggio a pavimento               | Напольное крепление        |
|  | Up/Down                        | aufwärts/abwärts strahlend         | Verlichting up of down | Éclairage haut ou bas                     | Emisión superior/ inferior          | Luce monoemissione sopra/sotto      | Освещение вверх или вниз   |
|  | Side                           | seitlich abstrahlend               | Verlichting lateraal   | Éclairage laterale                        | Emisión lateral                     | Luce laterale                       | Освещение в сторону        |
|  | Up and Down                    | direkt und indirekt abstrahlend    | Verlichting up en down | Éclairage haut et bas                     | Emisión superior e inferior         | Luce monoemissione sopra e sotto    | Освещение вверх и вниз     |
|  | Asymmetrical                   | asymetrisch abstrahlend            | Asymmetrisch           | Asymétrique                               | Asimétrico                          | asimmetrico                         | Асимметричный              |
|  | Surround                       | allseitig abstrahlend              | Sfeerverlichting       | Éclairage multidirections                 | Emisión perimetral                  | Luce diffusa                        | Освещение вокруг           |
|  | CE/VDE/ENEC Certificate        | CE Zertifikat                      | CE Certificaat         | Certificat CE                             | Certificado CE                      | Certificato CE                      | Сертификат CE              |
|  | Risk of injury (strangulation) | Verletzungsgefahr (Strangulierung) | Risico op verwonding   | Risque de blessure                        | Riesgo de lesiones (estrangulación) | Rischio infortunio (strangolamento) | Травмоопасность (удушение) |
| Kelvin                                                                                | colour temperature             | Farbtemperatur                     | Kleurtemperatuur       | Température de couleur                    | temperatura de color                | temperatura colore                  | Цветовая температура       |
| Blue lines                                                                            | not included part              | Teil nicht inkludiert              | Niet inbegrepen        | Pièce non comprise                        | parte no incluida                   | articolo non incluso                | В комплект не входит       |



HELLO, CAN YOU HEAR ME?

# CONTACT

## HEAD OFFICE + SHOWROOM

### WEVER & DUCRÉ BVBA

Spinnerijstraat 99/21  
8500 Kortrijk  
Belgium  
Phone +32 56 49 28 00  
office@weverducre.com  
weverducre.com

## REPRESENTATIVE OFFICES

### WEVER & DUCRÉ SCHWEIZ GMBH

Kellerstrasse 22  
6005 Luzern  
Switzerland  
Phone +41 41 361 60 60  
office.ch@weverducre.com

## SHOWROOMS

### WEVER & DUCRÉ DEUTSCHLAND GMBH

Schanzenstrasse 36, Geb. 234B  
51063 Cologne  
Germany  
Phone +49 221 13 06 49 60  
Fax +49 221 13 06 49 69  
office.de@weverducre.com

### WEVER & DUCRÉ ASIA PACIFIC LTD.

RM. 1413, Block A, Sea View Estate  
2 Watson Road North Point  
Hong Kong  
Phone +852 21 10 69 24  
Fax +852 31 06 40 96  
office.hk@weverducre.com  
office.cn@weverducre.com

### WEVER & DUCRÉ FRANCE

10, Rue Pecquay  
75004 Paris  
France  
Phone +33 1 40 29 81 01  
office.fr@weverducre.com

### WEVER & DUCRÉ LYON

36, Rue Juliette Récamier  
69006 Lyon  
France  
Phone +33 4 72 81 12 00  
office.fr@weverducre.com

### WEVER & DUCRÉ AB

Hårdvallsgatan 18  
115 46 Stockholm  
Sweden  
Phone +46 708 44 84 84  
office.se@weverducre.com

### WEVER & DUCRÉ ITALY

Via Monte Popera 4/2 (Design Center)  
30027 San Donà di Piave - Venezia  
Italy  
Phone +39 04 21 17 78 388  
office.it@weverducre.com

### WEVER & DUCRÉ UK

23 Batemans Row  
London EC2A 3HH  
United Kingdom  
Phone +44 20 31 74 01 77  
info.uk@weverducre.com

### WEVER & DUCRÉ POLAND

Ul. Posag 7 Panien 1a  
02-495 Warsaw  
Poland  
Phone +48 730 330 337  
office.pl@weverducre.com

### WEVER & DUCRÉ AUSTRIA

Gleisdorfer Gasse 15  
8010 Graz  
Austria  
Phone +43 316 31708591  
showroom.at@weverducre.com

### WEVER & DUCRÉ IBERIA

info.es@weverducre.com

### WEVER & DUCRÉ NETHERLANDS

info.nl@weverducre.com

### WEVER & DUCRÉ RUSSIA

russia@weverducre.com

### WEVER & DUCRÉ MIDDLE EAST

office.me@weverducre.com

### WEVER & DUCRÉ FINLAND

office.fi@weverducre.com

### WEVER & DUCRÉ NORWAY

office.no@weverducre.com

# 2nd edition, April 2020, ©Wever & Ducré® bvba.

All prices are non-binding recommended prices excluding VAT, lamps (bulbs) are not included. The prices and terms of payment stated in our order confirmation shall apply. To all prices and all extra expenses, we add the legally applicable value added taxes. Should our costs increase by the time of delivery, the prices can be recalculated on a pro rata basis. The prices stated shall apply net ex works. Information on availability as well as delivery terms and dates are provided as a point of reference only and are not binding. Prices are valid till the publication of a new price list. We expressly reserve the right to make changes in price, measurements and design. The details provided in this catalogue were correct at the time of publication. They do not constitute any kind of obligation on our part and are for information only. We shall not be held liable for any discrepancies between the illustrations or descriptions given and the actual product neither for any misprints and/or typing errors. We reserve the right to make alterations or modifications to our products at any time. All mentioned RAL codes are indicative and approximative. We shall not be held liable for any discrepancies which may occur. All mentioned lumen values refer to white luminaires (in terms of finishing, covers or housings). Further lumen values on request. The general terms and conditions of Wever & Ducré bvba shall apply to all purchases and orders. The applicable version of the general terms and conditions can be viewed at [weverducre.com/en/downloads](http://weverducre.com/en/downloads).

What's that? A whole new product range, and already several project references? See it this way: Inspiration is key to success in design, so what we care for most is inspiring you and showing you the potential of what we at Wever & Ducré do. Thus, we took the liberty of editing some original images to give you an impression of how our luminaires improve living, office, outdoor, and other spaces. These pictures are marked with an 

ThermoX® is a registered trademark of KAISER GmbH & Co KG ([kaiser-elektro.de](http://kaiser-elektro.de)), a company independent of Wever & Ducré.

## ARTWORK

## GRAPHIC DESIGN

## PRINT PRODUCTION

## ILLUSTRATION

## TEXT

## LITHOGRAPHY

## PRINTING

## PHOTOGRAPHY

Egija Zirapa, Location Brewery Cēsis (Latvia)

Carina Erlach, Ramona Gaar, Doris Tatschl, Valerie Thaller, Sara Wilfing

Carina Erlach, René Zavadilik

Lukas Hochenwarter, Doris Tatschl

Tanja Petschnig

Volker Waldhauser

Drukarnia Perfekt S.A., Warsaw, Poland

311PHOTOGRAPHY (p. 452-453) | Adelina Illiev (p. 536) | Aikon Producties bvba (p. 92) | Aleksandr Dal Cero (p. 268-269) | Alexander Maria Lohmann (p. 266) | Andrea Badrutt (p. 324) | Artion Istuganov (p. 598) | Aurélien Aumont (p. 170) | Beatrice Graalheim (p. 416) | B.C. Gassner (p. 582) | Bruno Eggermont (p. 156) | Candice Athenais (p. 69) | Carlo Ambrosi (p. 140) | Christian Brandstätter (p. 590) | Christian Repnik (p. 662) | Christian Weinrich (p. 130-139, 146) | Christoph Steinbauer (p. 86, 370, 428, 478, 566, 572, 630, 670, 676) | Corinna Unterkofler (p. 17) | Corinna Unterkofler/Joachim Grubelnik (p. 143, 392, 506-507, 652) | Croce & Wir (p. 664-665) | Dani Rovira Fotografia (p. 660) | David Aebi (p. 668) | Edgar Navarre (p. 508, 512) | Egon Gade (p. 248-249) | Emma Marshall Photography (p. 158-159) | FOTOMOHITO (p. 446) | Erich Sinzinger Fotografie (p. 666) | George Fakaros (p. 680) | Georges Leroux (p. 149) | Gerald Rafelghem (p. 640) | Hannes Windrath (p. 160) | Harald Eisenberger (p. 114-115) | Jack Lovel (p. 496, 548) | Fotografie Jaro van Meerten, The Art of Living Magazine (p. 214) | Jean Marc Manson (p. 274) | Jiří Dymáček (p. 614-615) | Joachim Grothus (p. 306) | KAPF-HAMMER (p. 50) | Kim Forrásén (p. 204, 426, 482, 602, 674) | Kris Dekeijser (p. 56, 68, 90, 94, 96, 102, 106-108, 112, 116, 122, 142, 152, 154, 172, 174-181, 186, 188, 190, 198, 202, 206-210, 212, 218, 230-233, 250, 254-258, 278, 282-286, 298, 300-301, 304, 310, 312-314, 328, 330-334, 360, 362, 372-375, 396-402, 408-410, 416, 422, 425, 430, 436, 440, 444, 448, 460, 464, 468, 470, 474, 484, 502, 504, 520, 556, 574, 578, 600, 606, 616, 628, 644, 646, 654, 682) | Kurt Hoerbst (p. 480, 580-581) | Kurt Kuball (p. 162-163, 594, 604, 642, 672) | Laura Bertone (p. 302, 322) | Lukas Jahn (p. 550-551) | Lukas Roth (p. 80) | Lupi Spuma Fine Photography (p. 8-12, 22-25) | Lux Visual Storytellers (portrait pictures cover) | Marc Diez (p. 38, 110) | Mark Hadden (p. 182, 404) | Marco Richter Photography (p. 220) | Martin Baitinger (p. 104-105) | Martin Steinthaler (p. 588) | Martin Zilka (p. 684) | Mattia Aquila (p. 280, 394) | Miriam Raneburger (p. 584) | Nikki Candelerio (p. 276-277) | Oliver Nauditt (p. 442) | Paul Karalius (p. 610, 678) | paul ott fotografiert (p. 82-84, 87, 433, 570-571, 612, 620, 634, 656, 658) | Paula Beetlestone (p. 618) | Peter Holgersson AB (p. 626) | Philip Kottlorz Fotografie (p. 44) | Photojoost (p. 462) | Rory Gardiner (p. 632) | Salvatore Guido (p. 30-36, 40-43, 46-48, 52-54, 58-66, 70-78, 120, 124, 144, 168, 194, 222-228, 260-262, 290-297, 316-321, 326, 386-389, 412-414, 420, 438, 490-494, 522-534, 538-540, 544, 552-554, 558, 560) | Saskia Devinne (p. 334) | SCHWARZ – LICHT / fotografie + kommunikation (p. 424) | Selma Hengeveld (p. 98) | Andrey Bezuglov (p. 216, 308) | Sonja Zettl (p. 100-101) | Søren Kristensen (p. 246) | Sourbron Fotografie (p. 450) | stella (COVER, p. 14-15) | Studio Erick Saillet (p. 192, 514) | Tiziano Cristofoli (p. 288, 289) | Tom Ferguson (p. 434, 546) | Vogelsänger Studios (p. 418-419) | Walters Media (p. 498, 500-501) | wide shot photography Alexandre Van Battel (p. 150) | www.raumpixel.at (p. 406) | Zvonimir Mihaljek (p. 596)

**THIS  
IS NOT  
THE  
END**

PAY A VISIT TO **WEVERDUCRE.COM**



