

Colours	○ ●
Housing	Aluminium, die cast
Fixture type	Track light
Module	Philips Fortimo SLM LED module
Driver	Driver incorporated in track adapter
Light output module	2000lm, 3000lm*
CCT	2700K, 3000K, 4000K*
CRI	>80Ra, >90Ra
Beam angles	15°, 24°, 45°
Adapter	Powergear® 3-phase Ultimate adapter included
Rotatable	350°
Tiltable	90°
LED modules	Standard
Dimming options	CASAMBI, DALI
Filter options	Not available
Expected lifetime	50.000h (L80/B20)
Photobiological safety	RG1 unlimited
Power factor	> 0.9
LOR	> 90%
Colour consistency	3 SDCM
Warranty	5 years warranty on LED module and driver



\* Other specific lumen output or CCT possible upon request




### Available LED modules:

Description	Lumen <sup>1</sup>	Watt <sup>2</sup>	lm/W	CCT	CRI
Philips Fortimo SLM G7	2000lm	12W	167	827, 830, 840	>80
Philips Fortimo SLM G7	2000lm	15W	133	927, 930, 930PW	>90
Philips Fortimo SLM G7	2000lm	14W	143	940 PW	>90
Philips Fortimo SLM G7	3000lm	18W	166	827, 830, 840	>80
Philips Fortimo SLM G7	3000lm	22W	136	927, 930, 930PW	>90
Philips Fortimo SLM G7	3000lm	20W	150	940 PW	>90

#### LED modules

**Standard:** CRI>80 and >90 in CCT 2700K, 3000K, 4000K

**Premium White (PW):** for fresh white and depth of colour in retail environments

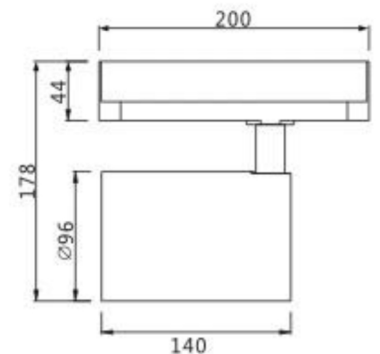

Net Weight	Dimensions carton L x B x H	Qty per carton
815 grams	00 x 00 x 00 cm	1

<sup>1</sup>) Lumen output of LED module (COB)

<sup>2</sup>) Mentioned wattage applies for the COB only. Mentioned wattage applies for the most efficient CCT. The power of the complete fixture will be slightly higher due to the power consumption of the driver.